

Order No.: 5LZ935100A | GTIN (EAN): 4058352838051


Product description: SCon31OffTDcontr,rec



SITECO Connect 31 Office, LCD touch panel, installation type: recessed, control gear: DALI, with terminal, 2-pole, max. 1.5mm², mains connection: 220..240V, AC, 50/60Hz, housing, of plastic, pure white (RAL 9010), length: 108mm, width: 30mm, height: 21mm, controller, local control - self-sufficient standalone sensors, equipment: master, dimmable, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible operating ambient temperature: -20..+60°C, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.1
GTIN (EAN): 4058352838051



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 23.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ935100A | GTIN (EAN): 4058352838051

Detailed technical description: SCon31OffTDcontr,rec



Key data

- System family: SITECO Connect 31 Office
- Product type: touchdim controller
- Product name: SITECO Connect 31 Office
- Order No.: 5LZ935100A

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): -20..+60°C
- Certification, designation: CE

Material, Colour

- housing: plastic, pure white (RAL 9010)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm²
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 108mm
- Width: 30mm
- Height: 21mm
- Weight: 0.1kg

Inputs

2x push button input

- Connection: screw terminal, 2-pole, max. 1.5mm²
- Feature: zero-potential


Outputs

2x DALI

- Connection: screw terminal, 2-pole, max. 1.5mm²
- System current: DALI current line 1 60mA, line 2 30mA
- Feature: two DALI lines, averaging with connected light sensors, connection of DALI2 certified sensors, DALI master function, broadcast addressing, max. 45 ECGs, DALI line 1, master function, broadcast addressing, max. 30 DALI ECGs, DALI line 2, master function, broadcast addressing, max. 15 DALI ECGs

Order No.: 5LZ935100A | GTIN (EAN): 4058352838051

Dimensions: SCon31OffTDcontr,rec

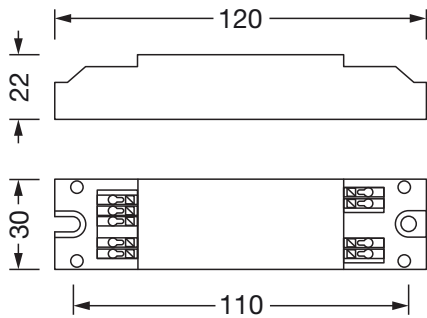

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 23.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -