

Order No.: 5XA248C31F08GE | GTIN (EAN): 4058352802410


Product description: DL50iQmn,S080002,5190lm730,SR



DL 50 iQ mini, mast luminaire, primary light control with lens, of PMMA, primary optical cover: cover, of toughened safety glass, transparent, light distribution: S080002, primary beam angle: wide distribution, light emission: direct distribution, primary light characteristic: asymmetric, 0% light immission, installation type: side-entry, post-top, installation location: on mast, lamps: LED, rated values: 5.190lm | 32,7W | 158,7lm/W (begin service life); end service life: 5.190lm | 33,7W; at 50% lumin. flux: 2.595lm | 15,7W | 165,3lm/W, colour temperature: 3000K, colour rendering: CRI > 70, light colour: 730, light setting 1 (further light settings possible): 100% | 5.190lm | 32,7W | 158,7lm/W | 3.000K (begin service life); end service life: 33,7W, control gear: iQ Street-Remote, control: optimised constant luminous flux control (CLO 2.0), Desk-Remote (wireless, voltage-free reading and setting of iQ features in the workshop via application-optimized NFC function/RFID function), Light-Fading, Smart-Wire, Night-Set, Lumen-Switch, Temp-Guard, Auto-Match, Street-Remote, mains connection: 220..240V, AC, 50/60Hz, surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode), connection cable: pre-assembled, cable length: 6,5m, wiring characteristics: H07RN-F, 5x 1,5mm², luminaire housing, of diecast aluminium, powder-coated, SITECO metallic grey (DB 702S), inclination adjustable: 0°, 5°, 10° (post-top) | 0°, -5°, -10°, -15° (side-entry), please order mast post-top element or mast side-entry element separately, diameter: 500mm, height: 115mm, post-top: for spigot size d x l = 76 x 100mm; with reducer (optional accessory) 60 x 100mm | side-entry: for spigot size d x l = 60 x 100mm; with reducer (optional accessory) 42 x 100mm, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, ENEC+, VDE, impact resistance: IK08, permissible operating ambient temperature for outdoor applications: -25..+40°C, standard-compliant lighting for roads and squares, packaging unit: 1 piece



Lamps: LED
Wt. (kg): 10.0
GTIN (EAN): 4058352802410



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 19.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5XA248C31F08GE | **GTIN (EAN):** 4058352802410

Detailed technical description: DL50iQmn,S080002,5190lm730,SR



Key data

- Product type: mast luminaire
- Product name: DL 50 iQ mini
- Order No.: 5XA248C31F08GE

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Cover: cover, transparent
- Light distribution: S080002
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated values: 5190lm | 32.7W | 158.7lm/W (begin service life); end service life: 5190lm | 33.7W; at 50% lumin. flux: 2595lm | 15.7W | 165.3lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 70
- Light colour: 730
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 5 SDCM (initial)

Factory light settings (LS):

- begin service life:
LS 1: 100% | 5190lm | 32.7W | 158.7lm/W | 3000K
- end service life:
LS 1: 33.7W
- further light settings possible

Operating device:

- Control: iQ Street-Remote
- Equipment: optimised constant luminous flux control (CLO 2.0), Desk-Remote (wireless, voltage-free reading and setting of iQ features in the workshop via application-optimized NFC function/RFID function), Light-Fading, Smart-Wire, Night-Set, Lumen-Switch, Temp-Guard, Auto-Match, Street-Remote

Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK08
- Temperature range (operation): -25...+40°C
- Supplement: standard-compliant lighting for roads and squares
- Certification, designation: CE, ENEC, ENEC+, VDE

Material, Colour

- luminaire housing: diecast aluminium, powder-coated, SITECO metallic grey (DB 702S), inclination adjustable: 0°, 5°, 10° (post-top) | 0°, -5°, -10°, -15° (side-entry), please order mast post-top element or mast side-entry element separately
- Cover: cover of toughened safety glass

Mounting

- Mounting method, mounting location: side-entry, post-top, on mast

Electrical connection

- Connection cable: pre-assembled, L= 6.5m, H07RN-F, 5x 1.5mm²
- Nominal voltage: 220...240V, 50/60Hz, AC
- Surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode)

Dimensions, Weight

- Diameter: 500mm
- Height: 115mm
- Weight: 10.0kg
- Mast spigot: post-top: for spigot size d x l = 76 x 100mm; with reducer (optional accessory) 60 x 100mm | side-entry: for spigot size d x l = 60 x 100mm; with reducer (optional accessory) 42 x 100mm

Light emission



- Light emission: 0% at 0° inclination

Service life

- Rated service life: 100000h (L95/B10) at AT = 25°C

Order No.: 5XA248C31F08GE | **GTIN (EAN):** 4058352802410

Dimensions: DL50iQmn,S080002,5190lm730,SR

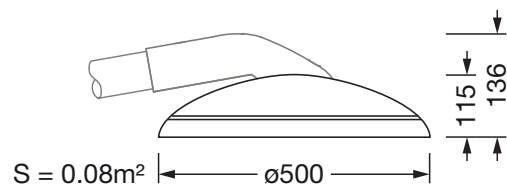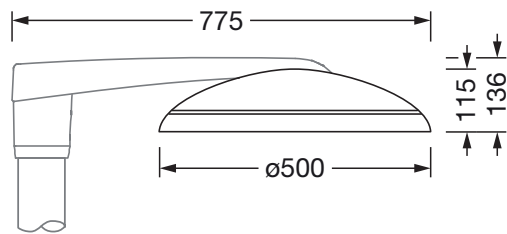

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 19.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -