

**Order No.:** 51FXB17P4D0A | **GTIN (EAN):** 4058352933336


**Product description:** MonEx, nrrw/med, 17900lm840, 0/1, 5x2.5<sup>2</sup>, PC



Monsun® Ex, damp-proof luminaire, primary optical cover: cover, of PC, UV-stabilised, opal, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 17.900lm, luminous efficacy: 154lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG, with terminal, 3-pole, max. 2.5mm<sup>2</sup>, through-wiring: 5x 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, rated input power: 116W, housing, of PC, light grey (RAL 7035), incl. blind plug, incl. 1x Ex cable gland M20 for cable diameter 7..12mm with sealing, length: 1.580mm, width: 155mm, height: 105mm, clip for enclosure, of stainless steel, protection rating (complete): IP66, insulation class (complete): insulation class I (protective earthing), certification: CE, explosion class: zone2,22 II 3G Ex nR IIC T6 GC, II 3D Ex tc IIIC T80°C Dc, impact resistance: IK10, permissible operating ambient temperature: -20..+40°C, LABS conformity tested according to VDMA 24364:2018-05, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, packaging unit: 1 piece

IP 66 IK 10  

Lamps:	LED
Wt. (kg):	5.7
GTIN (EAN):	4058352933336



**Order No.:** 51FXB17P4D0A | **GTIN (EAN):** 4058352933336

**Detailed technical description:** MonEx,nrrw/med,17900lm840,0/1,5x2.5<sup>2</sup>,PC



## Key data

- Product type: damp-proof luminaire
- Product name: Monsun® Ex
- Order No.: 51FXB17P4D0A

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Cover: cover, opal
- Beam angle: narrow/medium distribution
- Symmetry: symmetric
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 17900lm
- Luminous efficacy: 154lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 116W

#### Operating device:

- Control gear: ECG
- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK10
- Temperature range (operation): - 20..+40°C
- Supplement: LABS conformity tested according to VDMA 24364:2018-05, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Certification, designation: CE

## Material, Colour

- housing: PC, light grey (RAL 7035), incl. blind plug, incl. 1x Ex cable gland M20 for cable diameter 7..12mm with sealing
- Colour specification: light grey (RAL 7035)
- clip for enclosure: stainless steel
- Cover: cover of PC, UV-stabilised

## Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall, to the chain
- Arrangement: single arrangement

## Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC
- Through-wiring: 5x 2.5mm<sup>2</sup>

## Dimensions, Weight


- Length: 1580mm
- Width: 155mm
- Height: 105mm
- Mounting distance: 1000mm
- Weight: 5.7kg

## Service life

- Rated service life: 70000h (L80/B10) at AT = 25°C

**Order No.:** 51FXB17P4D0A | **GTIN (EAN):** 4058352933336

**Dimensions:** MonEx,nrrw/med,17900lm840,0/1,5x2.5<sup>2</sup>,PC

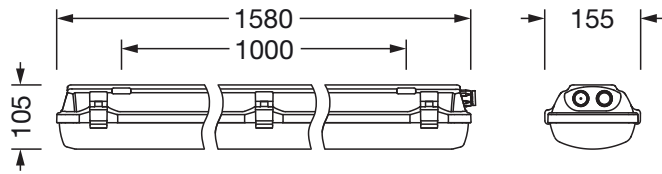

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)