

Order No.: 51RY19MB46C | **GTIN (EAN):** 4058352068298


Product description: Modario[®] 31 Sil,LI,dasy,6620lm840,ML,wh,5su



Modario[®] 31 Silica[®], luminaire insert, of aluminium, coated, traffic white (RAL 9016), length: 1.495mm, width: 79mm, height: 62mm, 5x system unit, system units: 299mm, LED rated luminous flux: 6.620lm, light colour: 840, control gear: ON/OFF Multilumen, with system connector: socket, mains connection: 220..240V, AC, 50/60Hz, rated input power: 38W, luminous flux adjustable on luminaire in four steps (3850/4650/5610/6620lm), connected load according to luminous flux setting (21.7/26.3/31.8/37.8W), primary light control with lens, of PMMA, primary anti-glare with reflector, of PC, light emission: direct distribution, primary light characteristic: double asymmetric, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, impact resistance: IK02, permissible ambient temperature for indoor applications: -20...+40°C, LABS conformity tested according to VDMA 24364:2018-05, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	1.6
GTIN (EAN):	4058352068298



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 08.05.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51RY19MB46C | **GTIN (EAN):** 4058352068298

Detailed technical description: Mod31Sil,LI,dasy,6620lm840,ML,wh,5su



Key data

- Product type: luminaire insert
- Product name: Modario® 31 Silica®
- Order No.: 51RY19MB46C

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Glare reduction: reflector of PC, white
- Symmetry: double asymmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 22
- UGR viewing direction along lateral luminaire axis: ≤ 22

Lamps:

- Lamps: with LED
- Rated luminous flux: 6620lm
- Luminous efficacy: 175lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 38W
- Supplement: luminous flux adjustable on luminaire in four steps (3850/4650/5610/6620lm), connected load according to luminous flux setting (21.7/26.3/31.8/37.8W)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Temperature range (operation): -20...+40°C
- Supplement: LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, UKCA

Material, Colour

- refurbishment insert: aluminium, coated, traffic white (RAL 9016), 5x system unit
- Quantity: 1 piece
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: slip-in mounting, to the trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for indoor use

Electrical connection

- Connection: system connector: socket
- Nominal voltage: 220...240V, 50/60Hz, AC

Dimensions, Weight


- Length: 1495mm
- Width: 79mm
- Height: 62mm
- Weight: 1.6kg

Service life

- Rated service life: 70000h (L80/B50) at AT = 25°C

Order No.: 51RY19MB46C | **GTIN (EAN):** 4058352068298

Dimensions: Mod31Sil,LI,dasy,6620lm840,ML,wh,5su

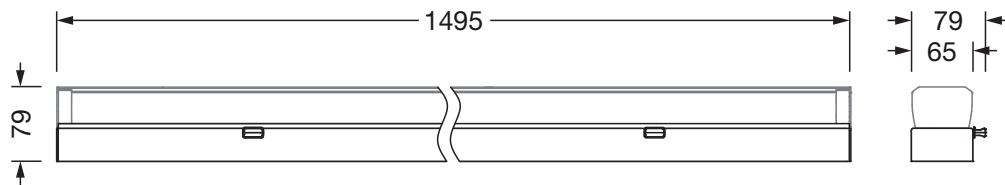

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 08.05.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -