


**Order No.:** 51MY6LMU34BA | **GTIN (EAN):** 4069025073358


**Product description:** Sil31sqbk,4600lm830,ML,M625,bk,li

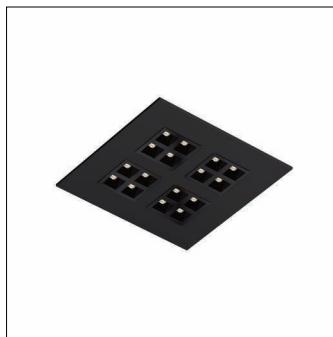

Silica 31 Square, office luminaire, primary light control with lens, of PMMA, primary anti-glare with reflector, of PC, black, light emission: direct distribution, primary light characteristic: symmetric, installation type: lay-in mounting, LED, rated luminous flux: 4.600lm, luminous efficacy: 166lm/W, light colour: 830, colour temperature: 3000K, control gear: ON/OFF Multilumen, with terminal, 3-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 27.7W, luminaire housing, of sheet steel, coated, jet black (RAL 9005), module: M625, length: 620mm, width: 620mm, height: 43mm, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, impact resistance: IK03, permissible operating ambient temperature: -20..+35°C, standard: EN 50419, packaging unit: 1 piece

IP 20 IK 03  CE


Lamps: LED  
Wt. (kg): 3.3  
GTIN (EAN): 4069025073358

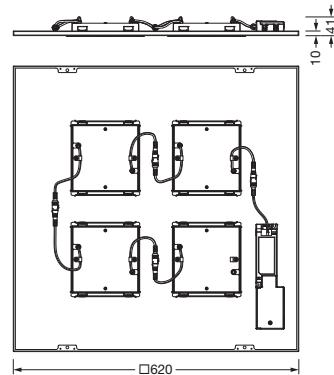

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MY6LMU34BA | GTIN (EAN): 4069025073358

Detailed technical description: Sil31sqbk,4600lm830,ML,M625,bk,li

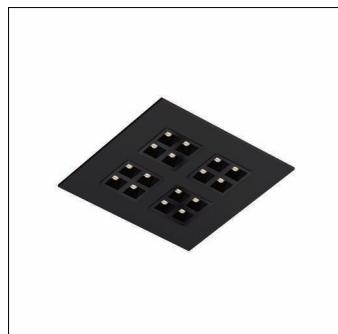

#### Key data

- Product type: office luminaire
- Product name: Silica 31 Square
- Order No.: 51MY6LMU34BA

#### Lighting technology | Lamps | Control gear

##### Component 1

###### Lighting technology:

- Light control: lens of PMMA
- Glare reduction: reflector of PC, black
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

###### Lamps:

- Lamps: with LED
- Rated luminous flux: 4600lm
- Luminous efficacy: 166lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 27.7W

###### Operating device:

- Control: ON/OFF Multilumen

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK03
- Temperature range (operation): - 20..+35°C
- Standard: EN 50419
- Certification, designation: CE

#### Material, Colour

- luminaire housing: sheet steel, coated, jet black (RAL 9005)
- Colour specification: jet black (RAL 9005)

#### Mounting

- Mounting method, mounting location: lay-in mounting, in the ceiling
- Arrangement: single arrangement

#### Electrical connection

- Connection: terminal, 3-pole
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 620mm
- Width: 620mm
- Height: 43mm
- Weight: 3.3kg

#### Service life

- Rated service life: 70000h (L85/B50) at AT = 25°C

**Order No.:** 51MY6LMU34BA | **GTIN (EAN):** 4069025073358

**Dimensions:** Sil31sqbk,4600lm830,ML,M625,bk,li

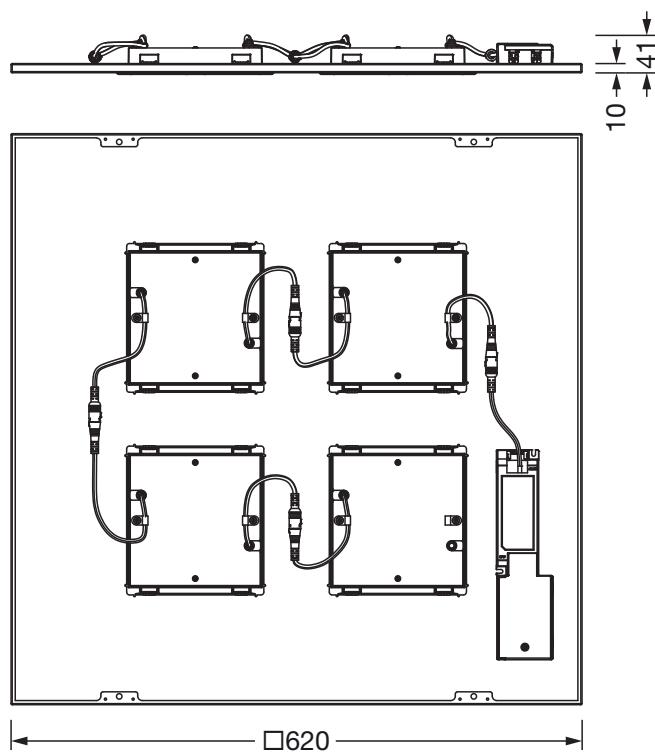

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -