

**Order No.:** 5XH3D3AB08MA | **GTIN (EAN):** 4069025095848


**Product description:** SL31md,ST1.0a,19510lm730,ELST



Streetlight SL 31 midi Easy LST mast luminaire for post-top, side-entry; light control with lens of PMMA; light distribution: ST1.0a, direct asymmetric distribution, for standard-compliant lighting for roads and squares; LED: luminous flux: 19.510lm, light colour: 730, colour temperature: 3000K; luminous efficacy: 134,3lm/W; control: pre-setting: linear dimming characteristic, flexible luminous flux parameterisation, time-dependent luminous flux control, constant luminous flux control, power reduction, intelligent temperature release in ECG and LED module, overheat protection; luminaire housing, of diecast aluminium, SITECO metallic grey (DB 702S), corrosivity category C5 high according to DIN EN ISO 12944; cover of toughened safety glass, transparent, mast flange of diecast aluminium, SITECO metallic grey (DB 702S), spigot size: 76/60mm, mast flange included unmounted; cable length: 12,5m, connection cable pre-assembled; mains connection: 220..240V, AC, 50/60Hz; power consumption (at start of service life): 145,3W / (at end of service life): 161,8W / (with reduced operation 50%): 61,1W; protection rating (complete): IP66; insulation class (complete): insulation class II (safety insulation); impact resistance: IK10; certification: CE, ENEC, ENEC+, VDE, UKCA; permissible operating ambient temperature for outdoor applications: -40..+50°C; packaging unit: 1 piece



Lamps: LED  
Wt. (kg): 10.0  
GTIN (EAN): 4069025095848

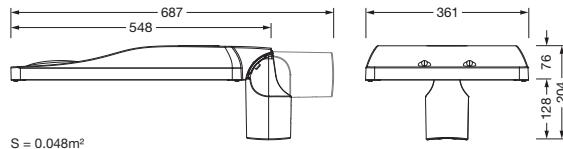

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 23.01.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5XH3D3AB08MA | GTIN (EAN): 4069025095848

Detailed technical description: SL31md,ST1.0a,19510lm730,ELST



#### Key data

- Product type: mast luminaire
- Product name: Streetlight SL 31 midi
- Order No.: 5XH3D3AB08MA

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Lighting technology:

- Light control: lens of PMMA
- Cover: cover, transparent
- Light distribution: ST1.0a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

##### Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 19510lm
- Luminous efficacy: 134lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 70
- Light colour: 730
- Rated input power begin service life: 145
- Rated input power end service life: 162
- Rated input power at 50% lumin. flux: 61

##### Operating device:

- Control: Easy LST
- Equipment: overheat protection, power reduction, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation, intelligent temperature release in ECG and LED module, pre-setting: linear dimming characteristic

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK10
- Temperature range (operation): - 40..+50°C
- Supplement: standard-compliant lighting for roads and squares
- Corrosion protection: corrosivity category C5 high according to DIN EN ISO 12944
- Certification, designation: CE, ENEC, ENEC+, VDE, UKCA

#### Material, Colour

- luminaire housing: diecast aluminium, powder-coated, SITECO metallic grey (DB 702S), sealing non-destructively replaceable, multi-level sealing system, inclination: -15°..+20° (post-top) | - 20°..+20° (side-entry), adjustable in 5° steps, no sealing on luminaire upper side
- Colour specification: SITECO metallic grey (DB 702S)
- mast flange: diecast aluminium, coated, SITECO metallic grey (DB 702S), mast flange included unmounted
- Colour specification: SITECO metallic grey (DB 702S)
- Cover: cover of toughened safety glass

#### Mounting

- Mounting method, mounting location: side-entry, post-top, on mast

#### Electrical connection

- Nominal voltage: 220..240V, 50/60Hz, AC
- Surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode)
- Connection cable: pre-assembled, L= 12.5m

#### Dimensions, Weight

- Weight: 10.0kg
- Mast spigot: spigot size: 76/60mm

#### Light emission

- Light emission: 0% at 0° inclination

**Order No.:** 5XH3D3AB08MA | **GTIN (EAN):** 4069025095848

**Detailed technical description:** SL31md,ST1.0a,19510lm730,ELST




**Service life**

- Rated service life: 100000h (L93/B10)  
at AT = 25°C

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 23.01.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XH3D3AB08MA | **GTIN (EAN):** 4069025095848

**Dimensions:** SL31md,ST1.0a,19510lm730,ELST

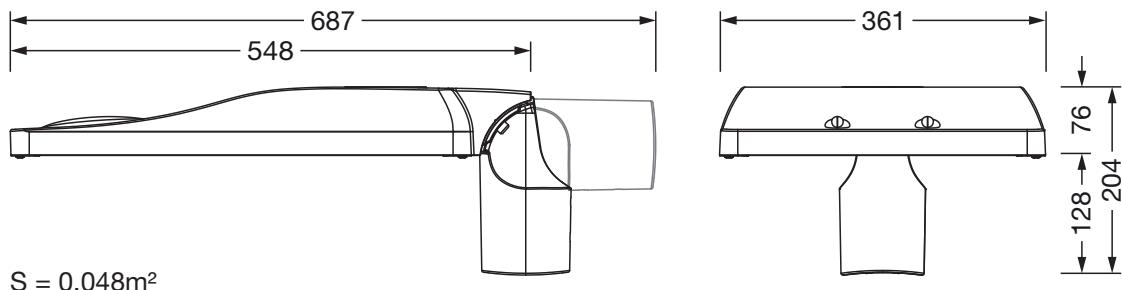

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 23.01.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -