

Order No.: 5LZ904712A | **GTIN (EAN):** 4058352548448


Product description: SCon21O,controller,wired



SITECO Connect 21-Ocontroller, master, central control - connection to lighting or building management, dimmable, installation type: recessed, installation location: in an electrical distributor, of plastic, part units: 6 part units, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, voltage: 100..240V, voltage type: AC, 1 x network connector Ethernet, 2 x DALI-2, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2
GTIN (EAN): 4058352548448



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 04.07.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ904712A | **GTIN (EAN):** 4058352548448

Detailed technical description: SCon21O,controller,wired



Key data

- System family: SITECO Connect 21 O
- Product type: control unit
- Product name: SITECO Connect 21-O
- Order No.: 5LZ904712A

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: DALI 2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE

Material, Colour

- housing: plastic, grey, 6 part units
- Colour specification: grey

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm²
- Nominal voltage: 100..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 91mm
- Width: 107mm
- Height: 62mm
- Weight: 0.2kg

Outputs

2x DALI-2

- Connection: plug-in terminal, 2-pole, max. 2.5mm²
- Limiting: max. 64x ECG DALI
- System current: DALI current 250mA per DALI line
- Cable length: max. 300m


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 04.07.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ904712A | **GTIN (EAN):** 4058352548448

Dimensions: SCon21O,controller,wired

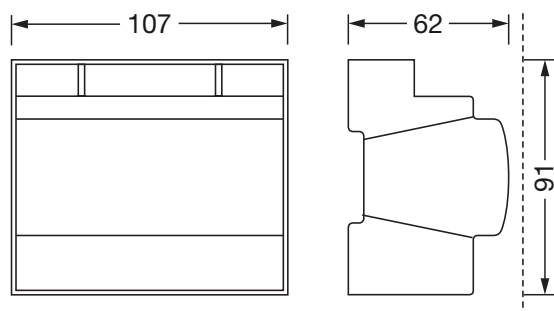

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 04.07.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -