


Order No.: 53BM812DU4M1D2D | **GTIN (EAN):** 4069025134691


Product description: Modario 31 G2, LI, wd, 26560lm 840, DA2, wh, 8su



Modario® 31 Gen.2, luminaire insert, of sheet steel, coil coated, white, length: 2.392mm, width: 81mm, height: 82mm, 8x system unit, system units: 299mm, LED rated luminous flux: 26.560lm, light colour: 840, SDCM (Standard Deviation of Colour Matching)MacAdam ≤ 3 SDCM (initial), control gear: DALI 2, with plug, 6-pole, with phase selection, mains connection: 220..240V, AC/DC, 0/50..60Hz, rated input power: 146W, for central battery installations according to EN 60598-2-22, for emergency light function, without changeover relay, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -40..+30°C, standard: EN 60598-2-22, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, IP40 when using the optional accessory 5TP9018, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	3.1
GTIN (EAN):	4069025134691

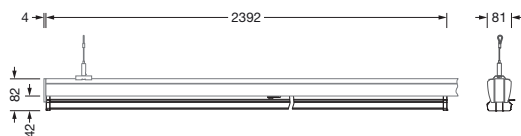

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 30.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 53BM812DU4M1D2D | **GTIN (EAN):** 4069025134691

Detailed technical description: Mod31G2,LI,wd,26560lm840,DA2,wh,8su

Key data

- Product type: luminaire insert
- Product name: Modario® 31 Gen.2
- Order No.: 53BM812DU4M1D2D

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 28
- UGR viewing direction along lateral luminaire axis: ≤ 28

Lamps:

- Lamps: with LED
- Rated luminous flux: 26560lm
- Luminous efficacy: 182lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 146W
- Supplement: without changeover relay, for emergency light function, for central battery installations according to EN 60598-2-22

Operating device:

- Control: DALI 2

Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): -40..+30°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, IP40 when using the optional accessory 5TP9018
- Standard: EN 60598-2-22
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- PS LED insert: sheet steel, coil coated, white, 8x system unit, for tool-free mounting of luminaire in Modario® trunking rail
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 6-pole, with phase selection
- Nominal voltage: 220..240V, 0/50..60Hz, AC/DC

Dimensions, Weight


- System units: 8x SE
- Length: 2392mm
- Width: 81mm
- Height: 82mm
- Weight: 3.1kg

Service life

- Rated service life: 70000h (L80) at AT = 25°C, 70000h (L80) at AT = ta max

Order No.: 53BM812DU4M1D2D | **GTIN (EAN):** 4069025134691

Dimensions: Mod31G2,LI,wd,26560lm840,DA2,wh,8su

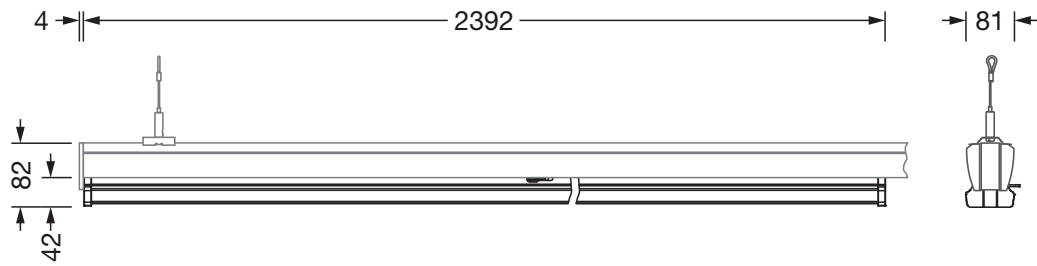

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 30.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com