


**Order No.:** 51TE11VN445G | **GTIN (EAN):** 4058352972175


**Product description:** Lic21Re,nrrw,4500lm840,DA2C,IP54,L1500



Licross 21 Recessed MO, luminaire insert, of sheet steel, galvanised, coil coated, white, length: 1.500mm, width: 66mm, height: 67mm, LED rated luminous flux: 4.500lm, light colour: 840, SDCM (Standard Deviation of Colour Matching)MacAdam  $\leq 2$  SDCM (initial), control gear: DALI 2, CLO, with plug, 5-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, start of lifetime: 24W, end of service life: 26W, internal wiring halogen-free, primary light control with lens, of plastic, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP54, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D if used in an environment with non-conductive dust loads with corresponding accessories, impact resistance: IK06, permissible ambient temperature for indoor applications: -25...+45°C, standard: EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data), corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05, The light source and the operating device comply with the requirements of the Ecodesign Regulation (EU) 2019/2020 and are replaceable in accordance with this regulation, packaging unit: 1 piece



|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 1.4           |
| GTIN (EAN): | 4058352972175 |



**Order No.:** 51TE11VN445G | **GTIN (EAN):** 4058352972175

**Detailed technical description:** Lic21Re,nrrw,4500lm840,DA2C,IP54,L1500



## Key data

- Product type: luminaire insert
- Product name: Licross 21 Recessed MO
- Order No.: 51TE11VN445G

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of plastic
- Cover: cover
- Beam angle: narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 16$
- UGR viewing direction along lateral luminaire axis:  $\leq 16$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 4500lm
- Luminous efficacy: 185lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 2$  SDCM (initial)
- Rated input power begin service life: 24
- Rated input power end service life: 26
- Supplement: internal wiring halogen-free

#### Operating device:

- Control: DALI 2, CLO

## Certificates, Standards

- Protection rating: IP54
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment with non-conductive dust loads with corresponding accessories
- Temperature range (operation): -25...+45°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05
- Standard: EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data)
- Certification, designation: CE, ENEC, VDE, UKCA

## Material, Colour

- Licross LED insert: sheet steel, galvanised, coil coated, white
- Cover: cover of PMMA

## Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

## Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 220...240V, 50/60Hz, AC

## Dimensions, Weight

- Length: 1500mm
- Width: 66mm
- Height: 67mm
- Weight: 1.4kg

## Service life

- Rated service life: 70000h (L100) at AT = 30°C


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 12.06.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51TE11VN445G | **GTIN (EAN):** 4058352972175

**Dimensions:** Lic21Re,nrrw,4500lm840,DA2C,IP54,L1500

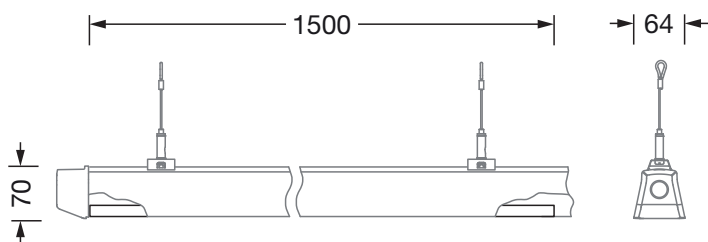

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 12.06.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)