


Order No.: 51DR10MDGGBB | **GTIN (EAN):** 4069025152053


Product description: Lun41Flat,Ø150,1530lm830/840,MLwh



Lunis 41 Flat, downlight, light emission: direct distribution, LED rated luminous flux: 1.530lm, light colour: 830/840, mains connection: 230V, AC, 50/60Hz, housing, round, of aluminium, coated, traffic white (RAL 9016), diameter: 170mm, protection rating (complete): IP20, protection rating (on room side): IP44, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	0.5
GTIN (EAN):	4069025152053

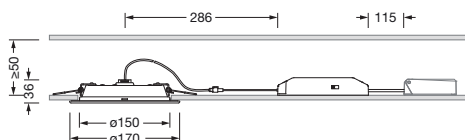


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DR10MDGBB | **GTIN (EAN):** 4069025152053

Detailed technical description: Lun41Flat,Ø150,1530lm830/840,MLwh



Key data

- Product type: downlight
- Product name: Lunis 41 Flat
- Order No.: 51DR10MDGBB

Dimensions, Weight

- Diameter: 170mm
- Height: 19mm
- Weight: 0.5kg

Lighting technology | Lamps | Control gear

Service life

- Rated service life: 30000h (L70/B50) at AT = 25°C

Component 1

Lighting technology:

- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 1530lm
- Luminous efficacy: 122lm/W
- Colour temperature: 3000/4000K
- Colour rendering index: CRI > 80
- Light colour: 830/840
- Rated input power: 12.5W
- Supplement: luminous flux adjustable on luminaire in two steps at 3000K (765/1530lm), luminous flux adjustable on luminaire in two steps at 4000K (790/1580lm)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP44
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): - 20...+40°C
- Certification, designation: CE

Material, Colour

- housing: aluminium, coated, traffic white (RAL 9016), round
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 150mm
- Arrangement: single arrangement

Electrical connection

- Nominal voltage: 230V, 50/60Hz, AC


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DR10MDGGBB | **GTIN (EAN):** 4069025152053

Dimensions: Lun41Flat, Ø150, 1530lm830/840, MLwh

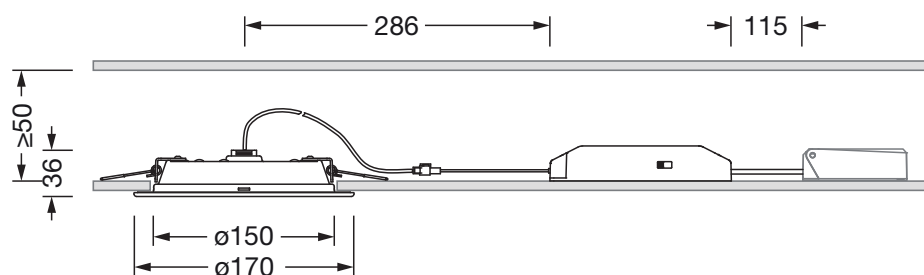

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com