


Order No.: 51DR10DDGGBB | **GTIN (EAN):** 4069025152015


Product description: Lun41Flat,Ø150,1750lm830/840,DA2wh



Lunis 41 Flat, downlight, light emission: direct distribution, LED rated luminous flux: 1.750lm, light colour: 830/840, control gear: ECG, mains connection: 230V, AC, 50/60Hz, housing, round, of aluminium, coated, traffic white (RAL 9016), diameter: 170mm, protection rating (complete): IP20, protection rating (on room side): IP44, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	0.3
GTIN (EAN):	4069025152015

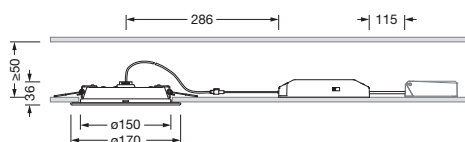


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DR10DDGGBB | **GTIN (EAN):** 4069025152015

Detailed technical description: Lun41Flat,Ø150,1750lm830/840,DA2wh



Key data

- Product type: downlight
- Product name: Lunis 41 Flat
- Order No.: 51DR10DDGGBB

Service life

- Rated service life: 50000h (L70/B50) at AT = 25°C

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 1750lm
- Luminous efficacy: 125lm/W
- Colour temperature: 3000/4000K
- Colour rendering index: CRI > 80
- Light colour: 830/840
- Rated input power: 14W

Operating device:

- Control gear: ECG
- Control: DALI 2

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP44
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): - 20...+40°C
- Certification, designation: CE

Material, Colour

- housing: aluminium, coated, traffic white (RAL 9016), round
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 150mm
- Arrangement: single arrangement

Electrical connection

- Nominal voltage: 230V, 50/60Hz, AC

Dimensions, Weight

- Diameter: 170mm
- Height: 19mm
- Weight: 0.3kg


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DR10DDGGBB | **GTIN (EAN):** 4069025152015

Dimensions: Lun41Flat, Ø150, 1750lm830/840, DA2wh

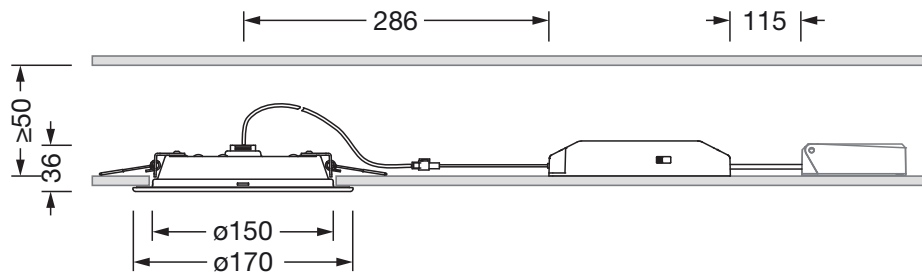

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com