

Order No.: 53BD812DV4D5D23SL3 | **GTIN (EAN):** 4069025254795


Product description: DUS31G2,Ll,wd,13680lm840,DA2,wh,5su



DUS® 31 Gen.2, luminaire insert, of sheet steel, coil coated, white, length: 1.535mm, width: 81mm, height: 90mm, 5x system unit, system units: 307mm, LED rated luminous flux: 13.680lm, light colour: 840, control gear: DALI 2, with plug, 6-pole, with phase selection (L1, L2), mains connection: 220..240V, AC, 50/60Hz, rated input power: 79W, for emergency light function, charging phase on L3 (wire number 3), through-wiring accessed according to module size, converter, control gear: single battery element, battery: LiFePO4, 9Ah, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: +5..+35°C, standard: EN 60598-2-22, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece

IP 20 IK 03  

Lamps:	LED
Wt. (kg):	2.3
GTIN (EAN):	4069025254795

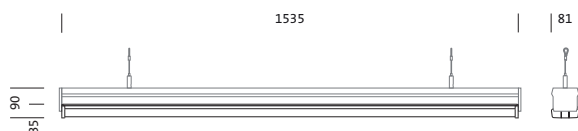

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 53BD812DV4D5D23SL3 | **GTIN (EAN):** 4069025254795

Detailed technical description: DUS31G2,Ll,wd,13680lm840,DA2,wh,5su



Key data

- Product type: luminaire insert
- Product name: DUS® 31 Gen.2
- Order No.: 53BD812DV4D5D23SL3

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 28
- UGR viewing direction along lateral luminaire axis: ≤ 28

Lamps:

- Supplement: with self-test function according to 60598-2-22, 2-rod battery

Operating device:

- Control gear: single battery element
- Battery: LiFePO4
- Nominal operating time: 3h

Component 2

Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): $+5\ldots+35^{\circ}\text{C}$
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Standard: EN 60598-2-22
- Certification, designation: CE, UKCA

Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in DUS® mounting rail
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 6-pole, with phase selection (L1, L2)
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- System units: 5x SE
- Length: 1535mm
- Width: 81mm
- Height: 90mm
- Weight: 2.3kg

Service life

- Rated service life: 70000h (L80/B50) at $\text{AT} = 25^{\circ}\text{C}$, 70000h (L80/B50) at $\text{AT} = \text{ta max}$

Order No.: 53BD812DV4D5D23SL3 | **GTIN (EAN):** 4069025254795

Dimensions: DUS31G2,LI,wd,13680lm840,DA2,wh,5su



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com