

Order No.: 5TR10300Q | **GTIN (EAN):** 4039806496324


Product description: Mod, trunk.rail, 3lg, L4485, wh



Modario, trunking rail, of sheet steel, coated, pure white, 3-length, length: 4.485 mm, width: 58 mm, height: 43mm, protection rating (complete): for IP20/IP40 protection rating, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 4.8
GTIN (EAN): 4039806496324

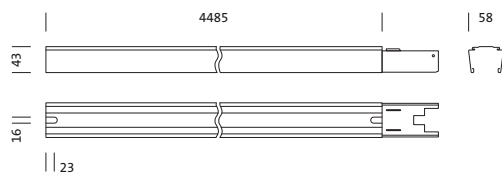

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 28.02.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5TR10300Q | **GTIN (EAN):** 4039806496324

Detailed technical description: Mod,trunk.rail,3lg,L4485,wh



Key data

- Product type: trunking components group (TS)
- Product name: Modario
- Order No.: 5TR10300Q

Certificates, Standards

- Protection rating: for IP20/IP40 protection rating
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

Material, Colour

- trunking rail: sheet steel, coated, pure white, 3-length, with pre-assembled trunking rail connectors

Mounting


- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Dimensions, Weight

- System units: 15x SE
- Length: 4485mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 4.8kg

Order No.: 5TR10300Q | **GTIN (EAN):** 4039806496324

Dimensions: Mod,trunk.rail,3lg,L4485,wh

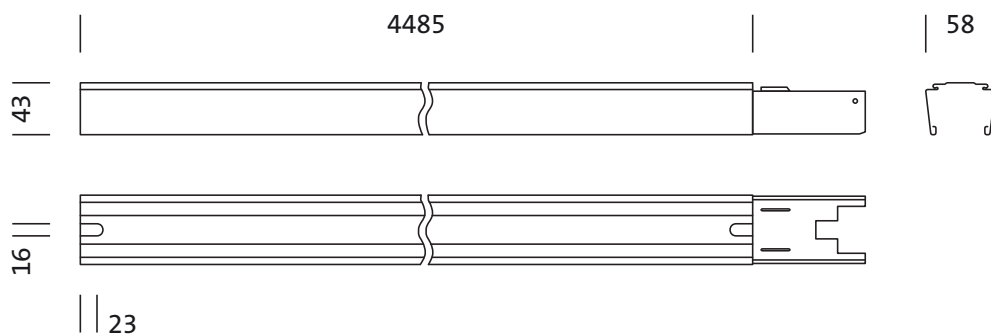

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 28.02.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -