

Order No.: 51HN12DB4MDA3S | **GTIN (EAN):** 4069025363558

Product description: HB11mx,wd,30000lm840,DA2,EL3h-iT




high bay luminaire Highbay 11 maxi; direct symmetric wide distribution, light control with lens of PMMA; $UGR \leq 22$ ($X = 4H$ | $Y = 8H$ | $S = 0.25H$ | reflection values 70/50/20); luminous flux: 30.000lm; light colour: 840, colour temperature: 4000K, MacAdam ≤ 2 SDCM (initial), colour rendering: CRI > 80 ; luminous efficacy: 199,6lm/W; rated service life: 100.000h (L95) at AT= 25°C; control: DALI 2; luminaire connection: terminal, 5+1-pole, max. 2.5mm² (cable entry for two cables, Ø 8.5..13mm); mains connection: 230..240V, AC 50/60Hz; connected load: 150,3W; protection rating (complete): IP66; insulation class (complete): insulation class I (protective earthing); protection symbol: D; impact resistance: IK08; certification: CE, UKCA; luminaire with self-contained emergency lighting element with integrated self-test function according to EN 60598-2-22, nominal operating time: 3h, battery: LiFePO₄, 9Ah; internal wiring halogen-free; luminaire LABS conformity tested according to VDMA 24364:2018-05; Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC; housing frame of high-performance plastic PA6, matt traffic white (RAL 9016); cover of PMMA; dimension (LxWxH): 946 x 442 x 72mm; permissible operating ambient temperature: +5..+35°C (reducing of maximum allowable ambient temperature of 5°C with ceiling mounting); packaging unit: 1 piece; (delivery without accessories; please order mounting accessories separately)

IP 66 IK 08



Lamps: LED
Wt. (kg): 7.6
GTIN (EAN): 4069025363558

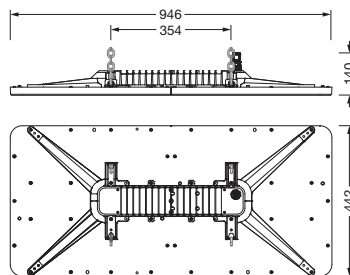

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 28.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51HN12DB4MDA3S | **GTIN (EAN):** 4069025363558

Detailed technical description: HB11mx,wd,30000lm840,DA2,EL3h-iT



Key data

- Product type: high bay luminaire
- Product name: Highbay 11 maxi
- Order No.: 51HN12DB4MDA3S

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 22
- UGR viewing direction along lateral luminaire axis: ≤ 22

Lamps:

- Lamps: with LED
- Rated luminous flux: 30000lm
- Luminous efficacy: 200lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 2 SDCM (initial)
- Rated input power: 150.3W
- Supplement: internal wiring halogen-free

Operating device:

- Control: DALI 2

Component 2

Operating device:

- Switching method: with self-contained emergency lighting element with integrated self-test function according to EN 60598-2-22
- Battery: LiFePO4
- Nominal operating time: 3h

Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK08
- Protection symbol: D
- Temperature range (operation): $+5..+35^{\circ}\text{C}$
- Supplement: LABS conformity tested according to VDMA 24364:2018-05, Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC
- Standard: EN 60598-2-22, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data)
- Certification, designation: CE, UKCA

Material, Colour

- housing frame: high-performance plastic PA6, matt traffic white (RAL 9016)
- Cover: cover of PMMA

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to wire, to the ceiling, to the wall, to the chain
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5+1-pole, max. 2.5mm^2
- Nominal voltage: 230..240V, 50/60Hz, AC

Dimensions, Weight

- Length: 946mm
- Width: 442mm
- Height: 72mm
- Weight: 7.6kg

Service life

- Rated service life: 100000h (L95) at AT = 25°C , 100000h (L90) at AT = ta max

Order No.: 51HN12DB4MDA3S | **GTIN (EAN):** 4069025363558

Dimensions: HB11mx,wd,30000lm840,DA2,EL3h-iT



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 28.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -