

**Order No.:** 52HN11DA6LMA | **GTIN (EAN):** 4069025445162


**Product description:** HB21/Mod-md,nrrw,25700lm865,DA2



high bay luminaire Highbay 21 for Modario trunking rail midi; direct symmetric narrow distribution, light control with lens of PMMA; UGR  $\leq 22$  (X = 4H | Y = 8H | S = 0.25H | reflection values 70/50/20); luminous flux: 25.700lm; light colour: 865, colour temperature: 6500K, MacAdam  $\leq 3$  SDCM (initial), colour rendering: CRI > 80; luminous efficacy: 180,2lm/W; rated service life: 75.000h (L80) at AT= ta max; control: DALI 2; luminaire connection: plug, 5-pole, with phase selection mains connection: 230..240V, AC 50/60Hz; connected load: 142,6W; protection rating (complete): IP20; insulation class (complete): insulation class I (protective earthing); protection symbol: D; impact resistance: IK06; certification: CE, UKCA; internal wiring halogen-free; luminaire LABS conformity tested according to VDMA 24364:2018-05; Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC; housing frame of high-performance plastic PA6, matt traffic white (RAL 9016); cover of PMMA; fixing on rail side of steel, galvanised, white; blank cover of PC, traffic white (RAL 9016); dimension (LxWxH): 1.195 x 442 x 72mm; permissible operating ambient temperature: -40..+55°C (reducing of maximum allowable ambient temperature of 5°C with ceiling mounting); packaging unit: 1 piece

IP 20 IK 06  

Lamps: LED  
 Wt. (kg): 3.5  
 GTIN (EAN): 4069025445162



Order No.: 52HN11DA6LMA | GTIN (EAN): 4069025445162

Detailed technical description: HB21/Mod-md,nrrw,25700lm865,DA2



#### Key data

- Product type: high bay luminaire
- Product name: Highbay 21 for Modario trunking rail midi
- Order No.: 52HN11DA6LMA

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 22$
- UGR viewing direction along lateral luminaire axis:  $\leq 22$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 25700lm
- Luminous efficacy: 180lm/W
- Colour temperature: 6500K
- Colour rendering index: CRI > 80
- Light colour: 865
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 142.6W
- Supplement: internal wiring halogen-free

#### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D
- Temperature range (operation): -40..+55°C
- Supplement: LABS conformity tested according to VDMA 24364:2018-05, Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC
- Certification, designation: CE, UKCA

#### Material, Colour

- housing frame: high-performance plastic PA6, matt traffic white (RAL 9016)
- fixing on rail side: steel, galvanised, white
- blank cover: PC, traffic white (RAL 9016)
- Cover: cover of PMMA

#### Mounting

- Arrangement: continuous row arrangement

#### Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 1195mm
- Width: 442mm
- Height: 72mm
- Weight: 3.5kg

#### Service life

- Rated service life: 75000h (L80) at AT = ta max

Order No.: 52HN11DA6LMA | GTIN (EAN): 4069025445162

Dimensions: HB21/Mod-md,nrrw,25700lm865,DA2

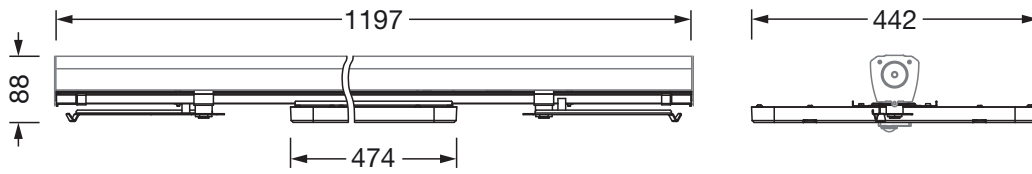

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 27.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -