siteco

**Order No.:** 51DC011DDD400A | **GTIN (EAN):** 4069025358820

**Product description:** Lun11R,rec4800lm940,DA2






Lunis 11 R, downlight, light control with reflector, highly specular, beam angle: wide distribution, light emission: direct distribution, LED rated luminous flux: 4.800lm, light colour: 940, with terminal, 3+2-pole, max. 2.5mm², mains connection: 230V, AC, 50/60Hz, diameter: 380mm, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, standard: EN 50419, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data), packaging unit: 1 piece

IP 20

| | |
|---|---|
| Lamps: | LED |
| Wt. (kg): | 1.4 |
| GTIN (EAN): | 4069025358820 |

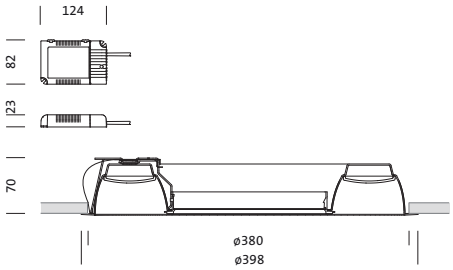


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

**Order No.:** 51DC011DDD400A | **GTIN (EAN):** 4069025358820

**Detailed technical description:** Lun11R,rec4800lm940,DA2



**Key data**
- Product type: downlight
- Product name: Lunis 11 R
- Order No.: 51DC011DDD400A

**Lighting technology | Lamps | Control gear**

**Component 1**

**Lighting technology:**
- Light control: reflector, highly specular
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution

**Lamps:**
- Lamps: with LED
- Rated luminous flux: 4800lm
- Luminous efficacy: 140lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 90
- Light colour: 940
- Rated input power: 34.3W

**Operating device:**
- Control: DALI 2

**Certificates, Standards**
- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Standard: EN 50419, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data)
- Certification, designation: CE

**Mounting**
- Mounting method, mounting location: recessed, in the ceiling

**Electrical connection**
- Connection: terminal, 3+2-pole, max. 2.5mm²
- Nominal voltage: 230V, 230..240V, 50/60Hz, AC


**Dimensions, Weight**
- Diameter: 380mm
- Weight: 1.4kg

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

**Order No.:** 51DC011DDD400A | **GTIN (EAN):** 4069025358820

**Dimensions:** Lun11R,rec4800lm940,DA2

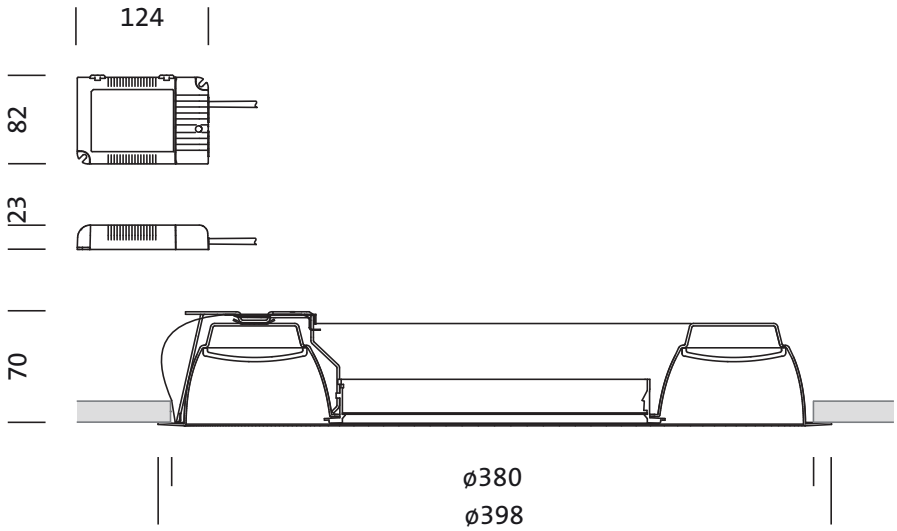


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com