siteco

Order No.: 51DC011DDB400A | **GTIN (EAN):** 4069025358806

Product description: Lun11R,rec4800lm930,DA2






Lunis 11 R, downlight, light control with reflector, highly specular, beam angle: wide distribution, light emission: direct distribution, LED rated luminous flux: 4.800lm, light colour: 930, with terminal, 3+2-pole, max. 2.5mm², mains connection: 230V, AC, 50/60Hz, diameter: 380mm, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, standard: EN 50419, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data), packaging unit: 1 piece

IP 20

Lamps:	LED
Wt. (kg):	2.0
GTIN (EAN):	4069025358806

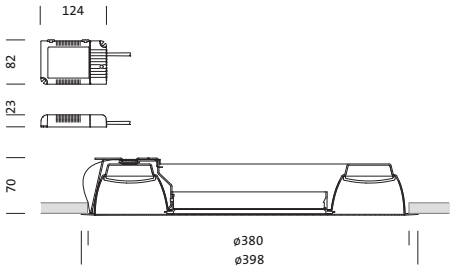

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

Order No.: 51DC011DDB400A | **GTIN (EAN):** 4069025358806

Detailed technical description: Lun11R,rec4800lm930,DA2



Key data
- Product type: downlight
- Product name: Lunis 11 R
- Order No.: 51DC011DDB400A

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:
- Light control: reflector, highly specular
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution

Lamps:
- Lamps: with LED
- Rated luminous flux: 4800lm
- Luminous efficacy: 142lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 90
- Light colour: 930
- Rated input power: 33.9W

Operating device:
- Control: DALI 2

Certificates, Standards
- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Standard: EN 50419, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data)
- Certification, designation: CE

Mounting
- Mounting method, mounting location: recessed, in the ceiling

Electrical connection
- Connection: terminal, 3+2-pole, max. 2.5mm²
- Nominal voltage: 230V, 230..240V, 50/60Hz, AC

Dimensions, Weight
- Diameter: 380mm
- Weight: 2.0kg


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

Order No.: 51DC011DDB400A | **GTIN (EAN):** 4069025358806

Dimensions: Lun11R,rec4800lm930,DA2

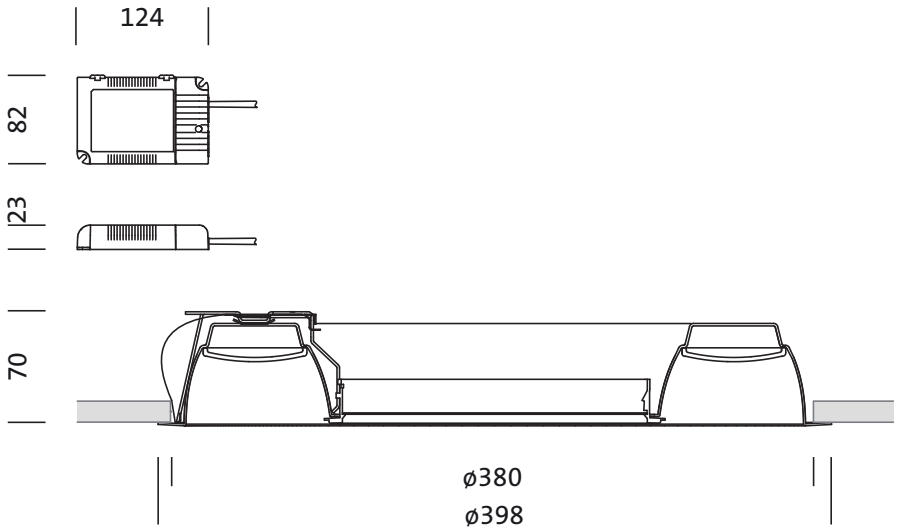

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com