

Order No.: 51MX53DA4ZM00982XX | **GTIN (EAN):** 4069025333858


Product description: Sil21FLL,13280lm840,DA2,PIR-sens,sr



Silica 21 Floor L, floorstanding luminaire, primary light control with darklight reflector, of PMMA, of PMMA, CAT 2 ($L \leq 3000 \text{cd/m}^2$), light emission: indirect/direct distribution, primary light characteristic: symmetric, primary optical cover: cover panel, installation type: not mounted, LED, rated luminous flux: 13.280lm, luminous efficacy: 157lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI 2, daylight-dependent control, mains connection: 230V, AC, 50/60Hz, connection cable pre-assembled, cable length: 2,5m, rated input power: 84.7W, luminaire head, of aluminium, powder-coated, metallic grey (RAL 9006), length: 1.454mm, width: 280mm, height: 2190mm, supporting column, angular, of aluminium, powder-coated, metallic grey (RAL 9006), baseplate, of steel, powder-coated, metallic grey (RAL 9006), sensor module PR3-S, local control - self-sufficient standalone sensors, equipment: master, direct and indirect component separately switchable, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, permissible operating ambient temperature: 0...+35°C, standard: EN 50419, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	13.7
GTIN (EAN):	4069025333858

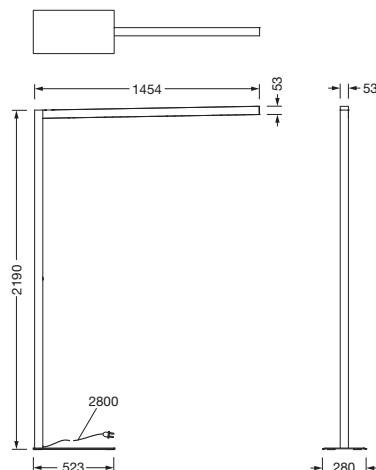

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MX53DA4ZM00982XX | **GTIN (EAN):** 4069025333858

Detailed technical description: Sil21FLL,13280lm840,DA2,PIR-sens,sr



Key data

- Product type: floorstanding luminaire
- Product name: Silica 21 Floor L
- Order No.: 51MX53DA4ZM00982XX

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover panel
- Beam angle: wide distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 13280lm
- Luminous efficacy: 157lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam $\leq$ 3 SDCM (initial)
- Rated input power: 84.7W
- Supplement: with ambient light and presence detector

Operating device:

- Control: DALI 2, direct and indirect component separately switchable
- Switching method: daylight-dependent control

Component 2

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE

Material, Colour

- luminaire head: aluminium, powder-coated, metallic grey (RAL 9006)
- supporting column: aluminium, powder-coated, metallic grey (RAL 9006), angular
- Quantity: 1 piece
- baseplate: steel, powder-coated, metallic grey (RAL 9006)
- Quantity: 1 piece
- Cover: cover panel

Mounting

- Mounting method, mounting location: not mounted

Electrical connection

- Nominal voltage: 230V, 50/60Hz, AC
- Connection cable: pre-assembled, L= 2.5m

Dimensions, Weight

- Length: 1454mm
- Width: 280mm
- Height: 2190mm
- Weight: 13.7kg

Service life

- Rated service life: 50000h (L85) at AT = 25°C

Inputs

1x PIR movement sensor

- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Detection range: tangential max. 4x4m
- Detection range: max. 2x 2m
- Option: detection range can be limited in stages using extendable lens covers (2x 180°)
- Feature: rectangular detection area

1x light sensor

- Illuminance: 20..800lx (directly at sensor)

1x push button

- Connection: IR receiver
- Option: ON/OFF, dimming, setpoint storage separately for direct and indirect component

Order No.: 51MX53DA4ZM00982XX | **GTIN (EAN):** 4069025333858

Detailed technical description: Sil21FLL,13280lm840,DA2,PIR-sens,sr



Outputs

1x LED red/green

— Feature: for displaying initialization

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)


Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 51MX53DA4ZM00982XX | **GTIN (EAN):** 4069025333858

Dimensions: Sil21FLL,13280lm840,DA2,PIR-sens,sr

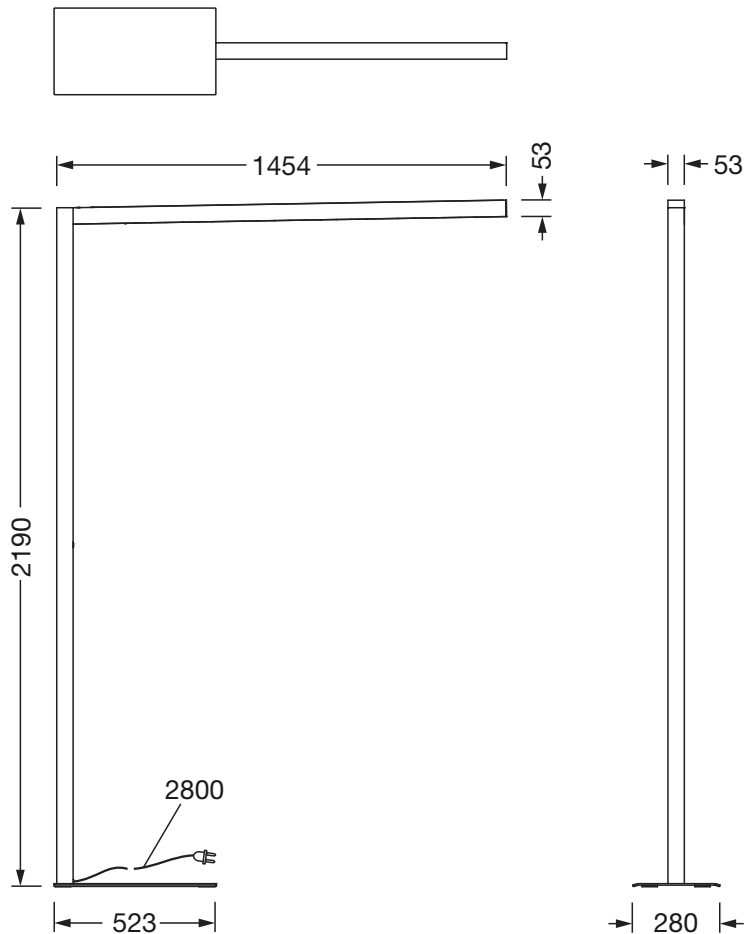

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -