
siteco

Order No.: 5SSCCWCN2 | **GTIN (EAN):** 4069025401700


Product description: CL-617/Slave/Con/CB/ACDC



Panik Sign, escape sign luminaire, of PC, primary optical cover: info panel, installation type: surface-mounted, LED, light colour: 860, colour temperature: 6000K, mains connection: 230V, AC/DC, 0/50Hz, rated input power: 1W, housing, of plastic, white, length: 315mm, width: 102mm, height: 74mm, conventional central battery, protection rating (complete): IP54, insulation class (complete): insulation class II (safety insulation), permissible operating ambient temperature: 0..+45°C, packaging unit: 1 piece

IP 54

Lamps:	LED
Wt. (kg):	0.5
GTIN (EAN):	4069025401700




It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

Order No.: 5SSCCWCN2 | **GTIN (EAN):** 4069025401700

Detailed technical description: CL-617/Slave/Con/CB/ACDC



Key data
- Product type: escape sign luminaire
- Product name: Panik Sign
- Order No.: 5SSCCWCN2

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:
- Cover: info panel

Lamps:
- Lamps: with LED
- Colour temperature: 6000K
- Colour rendering index: CRI > 80
- Light colour: 860
- Rated input power: 1W
- Supplement: for central battery installations

Certificates, Standards
- Protection rating: IP54
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+45°C

Material, Colour
- housing: plastic, white
- Cover: info panel

Mounting
- Mounting method, mounting location: surface-mounted, to the wall

Electrical connection
- Nominal voltage: 230V, 120..240V, 0/50Hz, AC/DC


Dimensions, Weight
- Length: 315mm
- Width: 102mm
- Height: 74mm
- Weight: 0.5kg

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

Order No.: 5SSCCWCN2 | **GTIN (EAN):** 4069025401700

Dimensions: CL-617/Slave/Con/CB/ACDC

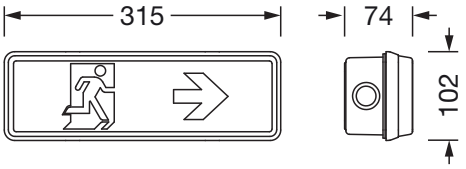

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com