


**Order No.:** 53BM812DV6A5C23S | **GTIN (EAN):** 4069025540829


**Product description:** Mod31G2,LI,wd,10550lm865,DA2,wh,5su



Modario 31 Gen.2, luminaire insert, of sheet steel, coil coated, white, length: 1.495mm, width: 81mm, height: 82mm, 5x system unit, system units: 299mm, LED rated luminous flux: 10.550lm, light colour: 865, SDCM (Standard Deviation of Colour Matching)MacAdam  $\leq$  3 SDCM (initial), control gear: DALI 2, with plug, 6-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 65W, for emergency light function, through-wiring accessed according to module size, converter,control gear: single battery element, battery: LiFePO4, 9Ah, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: +5..+35°C, standard: EN 60598-2-22, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, IP40 when using the optional accessory 5TP9018, The light source and the operating device comply with the requirements of the Ecodesign Regulation (EU) 2019/2020 and are replaceable in accordance with this regulation, packaging unit: 1 piece

IP 20 IK 03  

Lamps: LED  
 Wt. (kg): 2.0  
 GTIN (EAN): 4069025540829

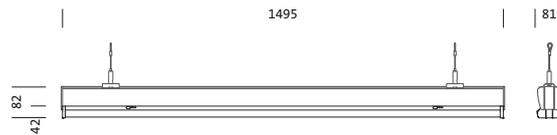

**Order No.:** 53BM812DV6A5C23S | **GTIN (EAN):** 4069025540829

**Detailed technical description:** Mod31G2,LI,wd,10550lm865,DA2,wh,5su



#### Key data

- Product type: luminaire insert
- Product name: Modario 31 Gen.2
- Order No.: 53BM812DV6A5C23S

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 28$
- UGR viewing direction along lateral luminaire axis:  $\leq 28$

#### Lamps:

- Supplement: with self-test function according to EN 60598-2-22, 2-rod battery

#### Operating device:

- Control gear: single battery element
- Battery: LiFePO4
- Nominal operating time: 3h

##### Component 2

#### Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): +5..+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, IP40 when using the optional accessory 5TP9018
- Standard: EN 60598-2-22
- Certification, designation: CE, UKCA

#### Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in Modario trunking rail
- Cover: cover of PMMA

#### Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: plug, 6-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight

- System units: 5x SE
- Length: 1495mm
- Width: 81mm
- Height: 82mm
- Weight: 2.0kg

#### Service life

- Rated service life: 70000h (L80) at AT = 25°C, 70000h (L80) at AT = ta max

Order No.: 53BM812DV6A5C23S | GTIN (EAN): 4069025540829

Dimensions: Mod31G2,LI,wd,10550lm865,DA2,wh,5su

