

Order No.: 51SD147AW2B | **GTIN (EAN):** 4058352678169


Product description: Spot21Pe,wd,2800lmWHR,0/1,90,wh



Spot 21 Performance, directional spotlight, light control with reflector, of aluminium, beam angle: wide distribution, LED rated luminous flux: 2.800lm, light colour: White Effect, control gear: ECG, with 3-phase adapter, mains connection: 220..240V, AC, 50/60Hz, housing, of aluminium, white, diameter: 90mm, adapter, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK02, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	0.8
GTIN (EAN):	4058352678169



Order No.: 51SD147AW2B | GTIN (EAN): 4058352678169

Detailed technical description: Spot21Pe,wd,2800lmWHR,0/1,90,wh



Key data

- Product type: directional spotlight
- Product name: Spot 21 Performance
- Order No.: 51SD147AW2B

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: reflector of aluminium
- Beam angle: wide distribution
- Symmetry: symmetric

Lamps:

- Lamps: with LED
- Rated luminous flux: 2800lm
- Colour rendering index: CRI > 90
- Light colour: White Effect

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Certification, designation: CE

Material, Colour

- housing: aluminium, white
- adapter: plastic

Electrical connection

- Connection: 3-phase adapter
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Diameter: 90mm
- Weight: 0.8kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 51SD147AW2B | GTIN (EAN): 4058352678169

Dimensions: Spot21Pe,wd,2800lmWHR,0/1,90,wh

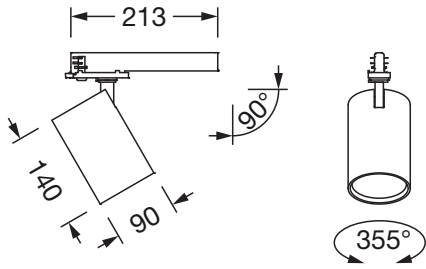

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 15.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -