

**Order No.:** 51MA63D84LWA | **GTIN (EAN):** 4069025628954


**Product description:** Sil21RPX,1500x225,5500lm840,DA2,surf,wh



Silica 21 Rectangular Prismatic X, office luminaire, primary optical cover: prismatic diffuser, of PMMA, CAT 2 ( $L \leq 3000 \text{ cd/m}^2$ ), light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 5.500lm, luminous efficacy: 164lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI 2, with system connector, mains connection: 220..240V, AC, 50/60Hz, rated input power: 33.6W, luminaire housing, of sheet steel, traffic white (RAL 9016), length: 1.500mm, width: 225mm, height: 35mm, equipment: standard, protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK03, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, packaging unit: 1 piece

IP 40 IK 03  CE

Lamps: LED  
Wt. (kg): 5.0  
GTIN (EAN): 4069025628954

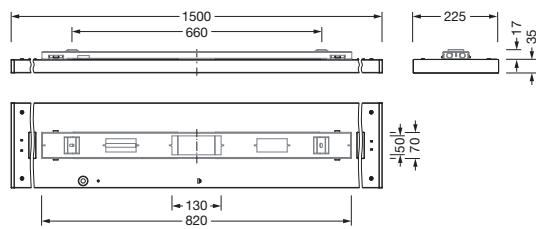

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 23.01.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51MA63D84LWA | **GTIN (EAN):** 4069025628954

**Detailed technical description:** Sil21RPX,1500x225,5500lm840,DA2,surf,wh



#### Key data

- Product type: office luminaire
- Product name: Silica 21 Rectangular Prismatic X
- Order No.: 51MA63D84LWA

#### Lighting technology | Lamps | Control gear

##### Component 1

###### Lighting technology:

- Cover: prismatic diffuser
- Beam angle: extremely wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 19$

###### Lamps:

- Lamps: with LED
- Rated luminous flux: 5500lm
- Luminous efficacy: 164lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI  $> 80$
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 33.6W

###### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE

#### Material, Colour

- luminaire housing: sheet steel, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: prismatic diffuser of PMMA

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single arrangement

#### Electrical connection

- Connection: system connector
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 1500mm
- Width: 225mm
- Height: 35mm
- Weight: 5.0kg

#### Service life

- Rated service life: 75000h (L85) at AT = 25°C

**Order No.:** 51MA63D84LWA | **GTIN (EAN):** 4069025628954

**Dimensions:** Sil21RPX,1500x225,5500lm840,DA2,surf,wh

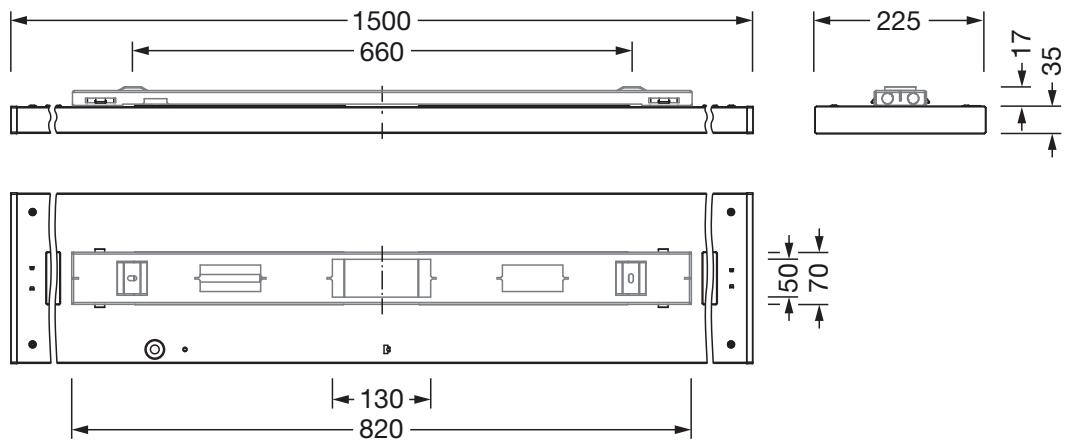

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
 Tolerances related to thermal, electrical and photometric data according to IEC 62722  
 Issued 23.01.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -