


Order No.: 51MA63D74LWA | **GTIN (EAN):** 4069025628718


Product description: Sil21RPX,1200x225,4400lm840,DA2,surf,wh



Silica 21 Rectangular Prismatic X, office luminaire, primary optical cover: prismatic diffuser, of PMMA, CAT 2 ($L \leq 3000 \text{cd/m}^2$), light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 4.400lm, luminous efficacy: 162lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI 2, with system connector, mains connection: 220..240V, AC, 50/60Hz, rated input power: 27.1W, luminaire housing, of sheet steel, traffic white (RAL 9016), length: 1.200mm, width: 225mm, height: 35mm, equipment: Standard, protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK03, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data), packaging unit: 1 piece

IP 40 IK 03  

Lamps: LED
Wt. (kg): 4.1
GTIN (EAN): 4069025628718

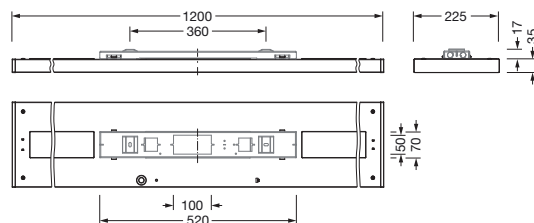


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 22.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MA63D74LWA | **GTIN (EAN):** 4069025628718

Detailed technical description: Sil21RPX,1200x225,4400lm840,DA2,surf,wh

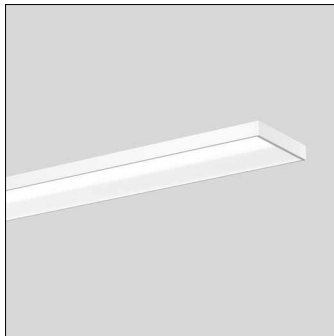

Key data

- Product type: office luminaire
- Product name: Silica 21 Rectangular Prismatic X
- Order No.: 51MA63D74LWA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: prismatic diffuser
- Beam angle: extremely wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 4400lm
- Luminous efficacy: 162lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 27.1W

Operating device:

- Control: DALI 2

Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): 0...+35°C
- Standard: EN 50419, EPBD ready: DALI 2 ECG, certified according to IEC62386, parts 251 (Luminaire Data), 252 (Energy Data), 253 (Diagnostics & Maintenance Data)
- Certification, designation: CE

Material, Colour

- luminaire housing: sheet steel, traffic white (RAL 9016)
- Cover: prismatic diffuser of PMMA

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single arrangement
- Supplement: ceiling mounting is only possible with a mounting box; please order separately according to luminaire length and housing colour

Electrical connection

- Connection: system connector
- Nominal voltage: 220...240V, 50/60Hz, AC

Dimensions, Weight

- Length: 1200mm
- Width: 225mm
- Height: 35mm
- Weight: 4.1kg

Service life

- Rated service life: 75000h (L85) at AT = 25°C


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 22.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MA63D74LWA | **GTIN (EAN):** 4069025628718

Dimensions: Sil21RPX,1200x225,4400lm840,DA2,surf,wh

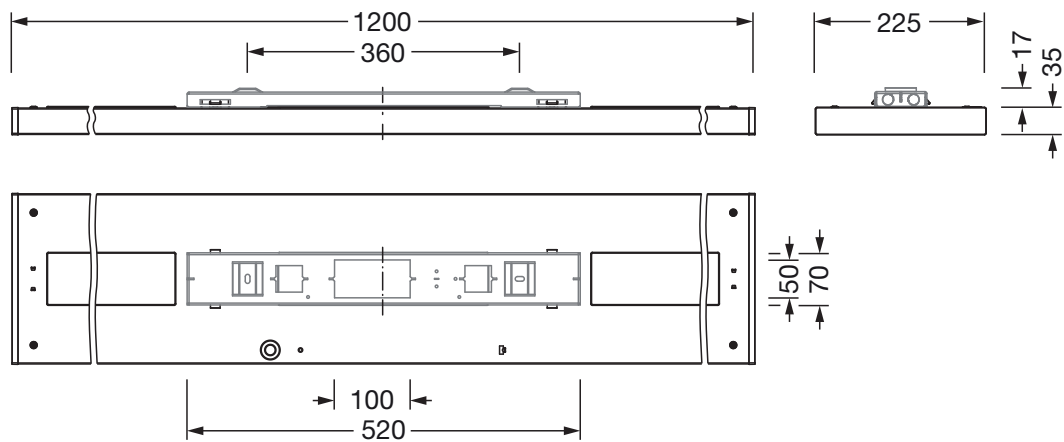

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 22.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -