

**Order No.:** 51FF40MP380L | **GTIN (EAN):** 4069025611871


**Product description:** Mon11fa,diff,8080lm830,ML,PMMA,L1590



Monsun 11 facade, damp-proof luminaire, chain hanger, primary optical cover: enclosure, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, horizontal mounting, vertical mounting, LED, rated luminous flux: 8.080lm, luminous efficacy: 179lm/W, light colour: 830, colour temperature: 3000K, control gear: ON/OFF Multilumen, with terminal, 3-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, rated input power: 45.1W, housing, of glass-fibre reinforced polyester, uncoated, bright grey, incl. chain hanger, for cables, Ø 8.4..12mm, with climate membrane, length: 1.590mm, width: 90mm, height: 88mm, clip for enclosure, of stainless steel (V2A), ceiling mounting element, of stainless steel (V2A), chain hanger, of stainless steel (V2A), protection rating (complete): IP66, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D, impact resistance: IK06, permissible operating ambient temperature: -35..+40°C, standard: EN 50419, EN 60598-2-1, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, LABS conformity tested according to VDMA 24364:2018-05, exposed outdoor area, packaging unit: 1 piece



Lamps: LED  
Wt. (kg): 2.5  
GTIN (EAN): 4069025611871

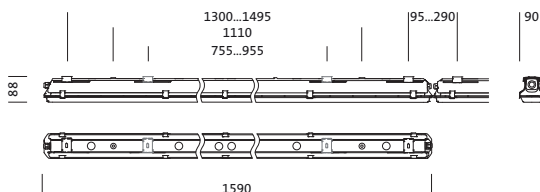

**Order No.:** 51FF40MP380L | **GTIN (EAN):** 4069025611871

**Detailed technical description:** Mon11fa,diff,8080lm830,ML,PMMA,L1590



## Key data

- Product type: damp-proof luminaire
- Product name: Monsun 11 facade
- Order No.: 51FF40MP380L

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Cover: enclosure
- Beam angle: diffuse distribution
- Symmetry: symmetric
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 8080lm
- Luminous efficacy: 179lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 45.1W
- Supplement: internal wiring halogen-free, without flicker

#### Operating device:

- Control: ON/OFF Multilumen

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D
- Temperature range (operation): -35..+40°C
- Supplement: exposed outdoor area, LABS conformity tested according to VDMA 24364:2018-05, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Standard: EN 50419, EN 60598-2-1
- Certification, designation: CE, ENEC, VDE, UKCA

## Material, Colour

- housing: glass-fibre reinforced polyester, uncoated, bright grey, incl. chain hanger, for cables,  $\varnothing$  8.4..12mm, with climate membrane
- clip for enclosure: stainless steel (V2A)
- Quantity: 10 piece
- ceiling mounting element: stainless steel (V2A), ceiling mounting included
- Quantity: 2 piece
- chain hanger: stainless steel (V2A)
- Quantity: 2 piece
- Cover: enclosure of PMMA

## Mounting

- Mounting method, mounting location: surface-mounted, horizontal mounting, vertical mounting, to the ceiling, to the wall
- Arrangement: single arrangement
- Supplement: for mounting in indoor and outdoor areas, luminaire includes fixing accessories for ceiling surface mounting; for other types of installation: please order mounting accessories separately

## Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC

## Dimensions, Weight

- Length: 1590mm
- Width: 90mm
- Height: 88mm
- Weight: 2.5kg

## Service life

- Rated service life: 100000h (L95) at AT = 25°C, 100000h (L90) at AT = ta max

**Order No.:** 51FF40MP380L | **GTIN (EAN):** 4069025611871

**Dimensions:** Mon11fa,diff,8080lm830,ML,PMMA,L1590



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 17.08.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -