

Order No.: 5XA86174N0J | **GTIN (EAN):** 4050737978291


Product description: TV20VPL,LED,3960lm840,ECG,PC,dir,surf




TV 20, vandal-proof luminaire, primary light control with specular reflector, of aluminium, matt, primary optical cover: enclosure, of PC, frosted, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED rated luminous flux: 3.960 lm, light colour: 840, colour temperature: 4000K, control gear: ECG, mains connection: 230V, AC, 50Hz, rated input power: 37W, luminaire housing, of aluminium, coated, Siteco® metallic grey (DB 702S), length: 1.261 mm, width: 260 mm, height: 70mm, protection rating (complete): IP65, insulation class (complete): insulation class I (protective earthing), certification: CE, protection symbol: F, impact resistance: 2x IK10, standard: EN 60598, packaging unit: 1 piece

IP 65 2xIK 10  

4050737978291
5XA86174N0J

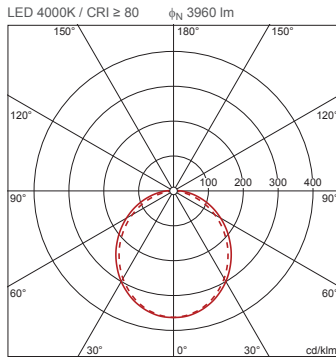

Lamps:	LED
Wt. (kg):	7.9
GTIN (EAN):	4050737978291

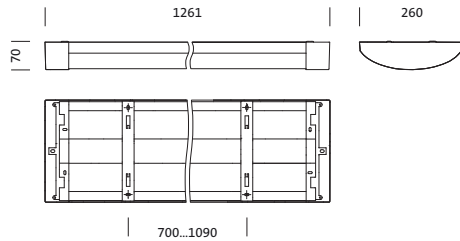

Order No.: 5XA86174N0J | GTIN (EAN): 4050737978291

Detailed technical description: TV20VPL,LED,3960lm840,ECG,PC,dir,surf



Key data

- Product type: vandal-proof luminaire
- Product name: TV 20
- Order No.: 5XA86174N0J

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: specular reflector of aluminium, matt
- Cover: enclosure, frosted
- Symmetry: symmetric distribution
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 3960lm
- Luminous efficacy: 107lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 37W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class I (protective earthing)
- Impact resistance: 2x IK10
- Protection symbol: F
- Standard: EN 60598
- Certification, designation: CE

Material, Colour

- luminaire housing: aluminium, coated, Siteco® metallic grey (DB 702S), with wall and ceiling fixing element
- Colour specification: Siteco® metallic grey (DB 702S)
- Cover: enclosure of PC

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall
- Arrangement: single/continuous arrangement

Electrical connection

- Nominal voltage: 230V, 50Hz, AC

Dimensions, Weight


- Length: 1261mm
- Width: 260mm
- Height: 70mm
- Weight: 7.9kg

Service life

- Rated service life: 50000h (L80/B10) at AT = 25°C

Order No.: 5XA86174N0J | GTIN (EAN): 4050737978291

Dimensions: TV20VPL,LED,3960lm840,ECG,PC,dir,surf

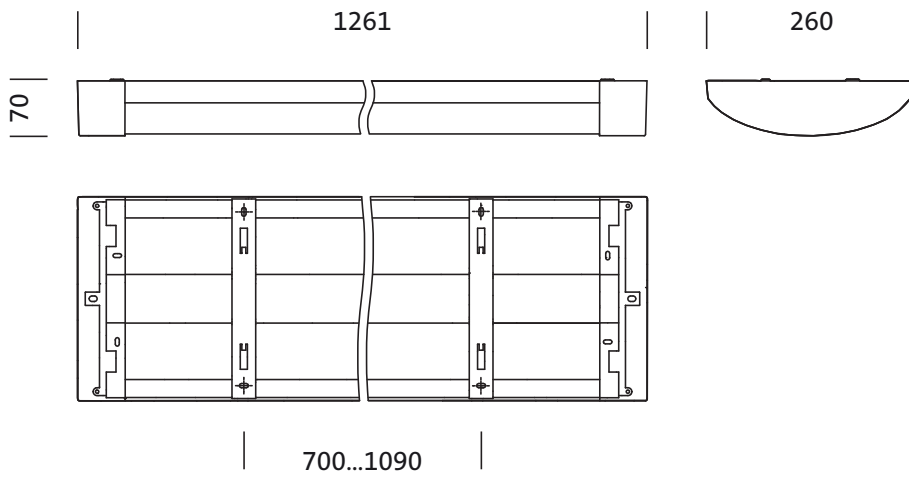

Order No.: 5XA86174N0J | **GTIN (EAN):** 4050737978291

Planning data: TV20VPL,LED,3960lm840,ECG,PC,dir,surf


5XA86174N0J: 1x LED 4000K
/ CRI ≥ 80

4050737978291

5XA86174N0J

LED 4000K / CRI ≥ 80

Φ_N 3960 lm

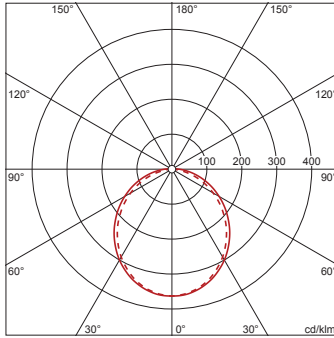

— C 0/180 - - - C 90/270

No. of luminaires in room

Reflection factors 70/50/20

Em(x)	100		200		500	
	2.5	3.0	2.5	3.0	2.5	3.0
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m²	0.8	0.9	1.5	1.8	3.9	4.5
30 m²	1.2	1.3	2.3	2.6	5.8	6.5
40 m²	1.5	1.6	2.9	3.3	7.4	8.2
50 m²	1.8	2.0	3.5	3.9	8.9	9.8
75 m²	2.6	2.8	5.1	5.6	13	14
100 m²	3.3	3.6	6.6	7.1	17	18
500 m²	15	16	30	31	75	78

Maintenance factor 0.8

Rh = Lh