

Order No.: 5LZ930103 | **GTIN (EAN):** 4058352385937


Product description: SConI/O,basepackM/P,centCtrlI/O



SITECO Connect I/O, base package M/P, 1..18 DALI lines, 7" touch panel PC with Intel Atom®, max. 4 cores, 7" TFT display, central control (Siteco Connect I/O) installation type: recessed, installation location: in an electrical distributor, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, voltage: 230V, voltage type: AC, 1 x DALI-2, software: Lighting Solution

IP 20  

Wt. (kg): 0.9
GTIN (EAN): 4058352385937

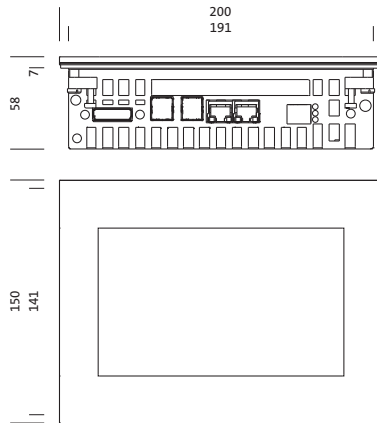

Order No.: 5LZ930103 | GTIN (EAN): 4058352385937

Detailed technical description: SConI/O,basepackM/P,centCtrlI/O



Key data

- Product type: lighting management components
- Product name: SITECO Connect I/O
- Order No.: 5LZ930103

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP54
- Insulation class: insulation class I (protective earthing)
- Certification, designation: CE

Material, Colour

- Colour specification: black
- housing: metal, silver
- Colour specification: silver

Mounting

- Mounting method, mounting location: recessed, in an electrical distributor

Electrical connection

- Nominal voltage: 230V, AC

Dimensions, Weight

- Weight: 0.9kg

Outputs

1x DALI-2

- Protocol: according to current DALI-2 standard
- Feature: integrated power supply (250mA per DALI line)

Software

- Software: Lighting Solution
- Supplement: software pre-installed, TC3 licences (platform 30) TC3 PLC, TC3 PLC HMI, TC3 PLC HMI Web, TC3 XLS

Order No.: 5LZ930103 | GTIN (EAN): 4058352385937

Dimensions: SConI/O,basepackM/P,centCtrl/O

