

Order No.: 5WM25CD03XN2 | **GTIN (EAN):** 4058352385364


Product description: TL13,51600lm850,DA,TSG



TL 13, tunnel luminaire, primary optical cover: cover panel, of toughened safety glass, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, connection on control gear side, LED Mid Power LED, rated luminous flux: 51.600 lm, light colour: 850, colour temperature: 5000K, control gear: ECG DALI, with connection cable with system connection, mains connection: 220..240V, AC, 50/60Hz, connection cable pre-assembled, cable length: 1 m, rated input power: 275W, connection on mains side, with terminal, luminaire housing, of stainless steel 1.4404 (AISI316), etched and passivated, length: 1.529 mm, width: 56 mm, height: 36mm, e-box, of stainless steel 1.4404 (AISI316), etched and passivated, length: 510 mm, width: 213 mm, height: 112mm, protection rating (complete): IP66, certification: CE, packaging unit: set of 12

IP 66 CE

Lamps: LED
 Wt. (kg): 30.1
 GTIN (EAN): 4058352385364

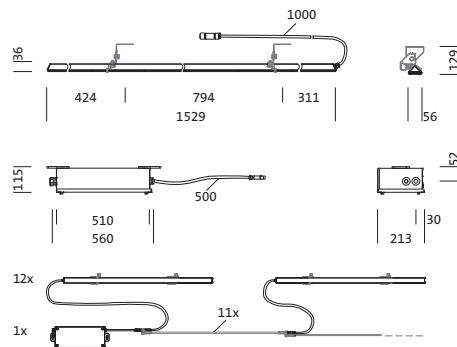

Order No.: 5WM25CD03XN2 | GTIN (EAN): 4058352385364

Detailed technical description: TL13,51600lm850,DA,TSG



Key data

- Product type: tunnel luminaire
- Product name: TL 13
- Order No.: 5WM25CD03XN2

Dimensions, Weight

- Length: 1529mm
- Width: 56mm
- Height: 36mm
- Weight: 30.1kg

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover panel
- Symmetry: symmetric distribution
- Light emission: direct distribution

Lamps:

- Supplement: minimum bending radius:
cable diameter x 10

Operating device:

- Control gear: ECG DALI
- Control: DALI

Component 2

Component 3

Certificates, Standards

- Protection rating: IP66
- Certification, designation: CE

Material, Colour

- luminaire housing: stainless steel
1.4404 (AISI316), etched and
passivated
- Quantity: 12 piece
- e-box: stainless steel 1.4404 (AISI316),
etched and passivated
- Quantity: 1 piece
- Cover: cover panel of toughened safety
glass

Mounting




- Mounting method, mounting location:
surface-mounted, to supporting
structure, to the ceiling

Electrical connection

- Connection: connection cable with
system connection
- Nominal voltage: 220..240V, 50/60Hz,
AC
- Connection cable: pre-assembled, L=
1m

Order No.: 5WM25CD03XN2 | GTIN (EAN): 4058352385364

Dimensions: TL13,51600lm850,DA,TSG

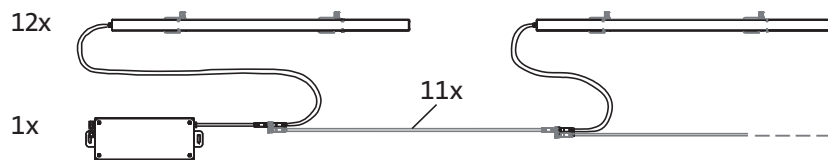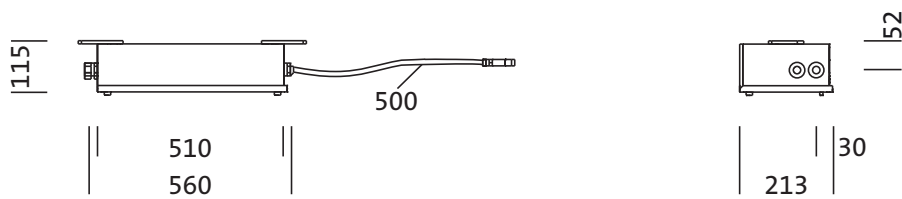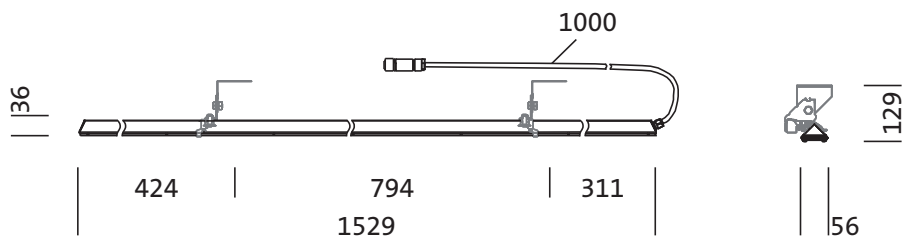

Order No.: 5WM25CD03XN2 | GTIN (EAN): 4058352385364


Planning data: TL13,51600lm850,DA,TSG

5WM25CD03XN2: 1x LED

4058352385364

5WM25CD03XN2

LED 5000 K | CRI \geq 80 ϕ_{N} 4300 lm



— C 0/180 - - - C 90/270