siteco

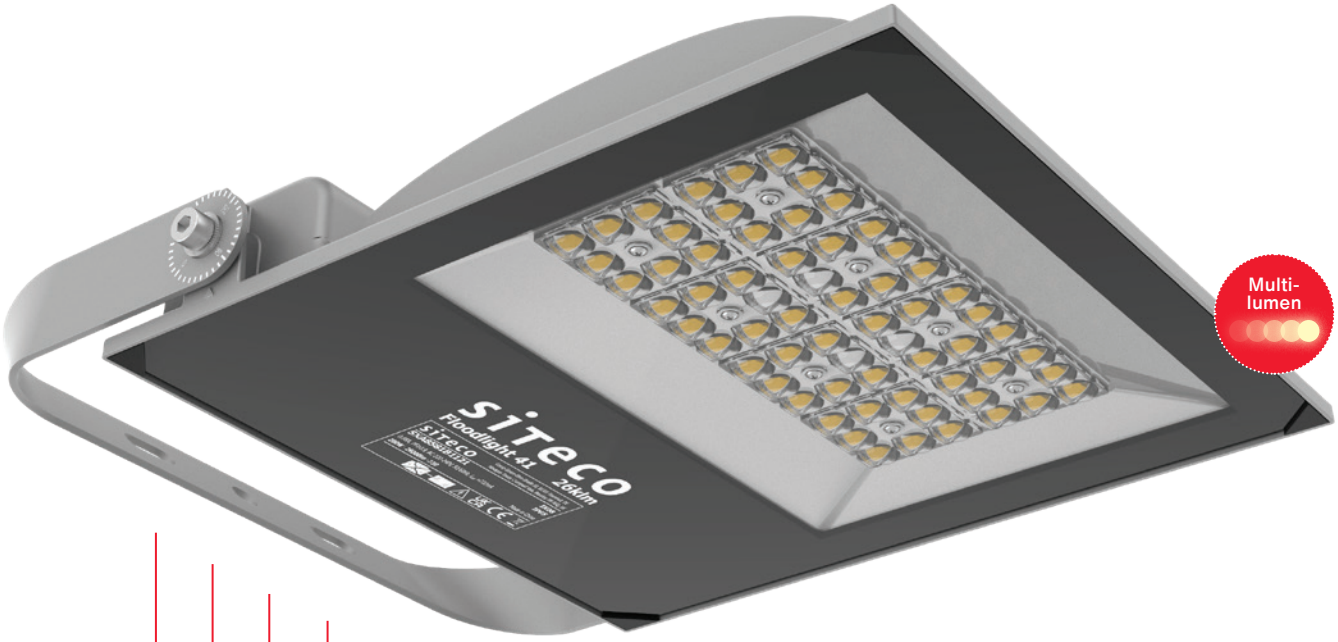

Highest level of efficiency
Fast pay-back thanks to low procurement costs and luminous efficacy of 130 lm / W

Quick and easy installation
Thanks to a preinstalled 2 m connection cable and mounting-bracket system

Maximum flexibility
Thanks to various sizes, installation options and multi-lumen function directly on the luminaire

Precise, homogeneous surface illumination
Thanks to asymmetrical deep-beam light distribution PL32, standard-compliant light into every corner – and with greater uniformity than comparative solutions

Stylish and high-quality design
Thanks to an in-house design concept with aluminum housing and optic cover made of safety glass

Floodlight FL 41

The best of its class.

Floodlight FL 41
The best of its class.

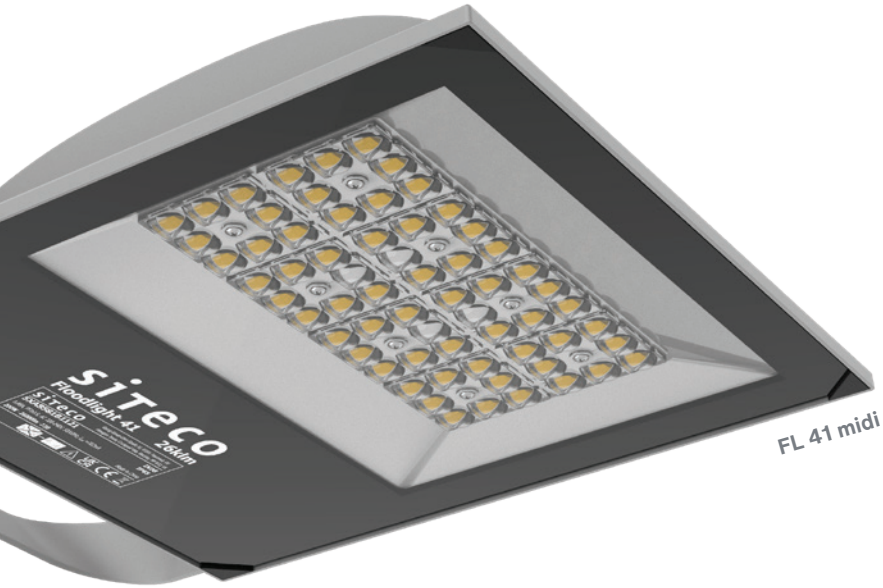

FL 41 midi

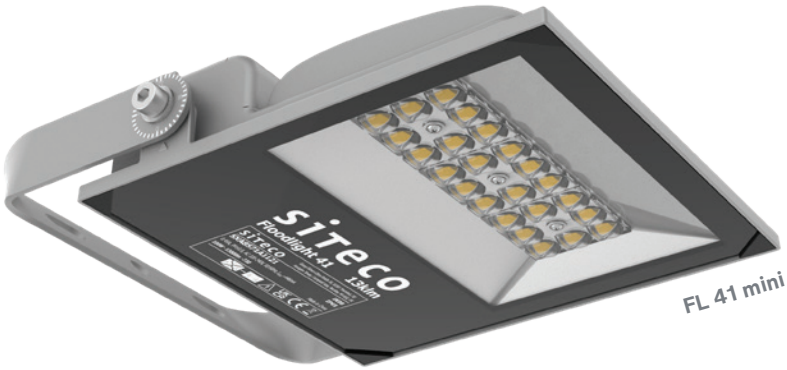

FL 41 mini

IP65 IK08

Applies to all FL 41 models:

Optical concept

- Lens technology (PC)
- Tilt options: from 0° to +180°

Light colors

- 3000 K | 4000 K
- Color rendering: CRI = 70

Type of protection

- IP65
- Safety class: SK I
- Impact resistance: IK08

Mounting

- Preinstalled 2m connection cable
- Preinstalled mounting-bracket system

Control system

- ON / OFF | multi-lumen switch

Weight

- FL 41 mini: 2.4 kg
- FL 41 midi: 3.9 kg





	L	B	H	H1	L1
FL 41 mini	263	245	115	58	30
FL 41 midi	298	335	143	65	35

Multi-lumen function	FL 41 mini		FL 41 midi	
	lm	W	lm	W
Pre-adjusted basic settings	13,000	100	26,000	200
1	9,100	70	22,100	170
2	6,500	50	19,500	150
3	3,900	30	13,000	100

The floodlight for universal applications.
Flexible and cost efficient.

Floodlight FL 41 mini

Technical data

Luminous flux: 3,900 lm to 13,000 lm
Power: up to 100 W
Luminous efficacy: 130 lm / W
Service life: 50,000 h (L80 / B50) at 25 °C

Applications

Façades, parking lots, loading zones, town squares

Order numbers

3,000 K | CRI 70	5XA8571A1121
4,000 K | CRI 70	5XA8571A2121

Floodlight FL 41 midi

Technical data

Luminous flux: 13,000 lm to 26,000 lm
Power: up to 200 W
Luminous efficacy: 130lm/W
Service life: 50,000 h (L80 / B50) at 25 °C

Applications

Façades, parking lots, loading zones, town squares

Order numbers

3,000 K | CRI 70	5XA8581B1121
4,000 K | CRI 70	5XA8581B2121

Light distribution for floodlight FL 41 models:

PL32 – to narrowly distribute light on town squares



Contact.

Siteco GmbH
Georg-Simon-Ohm-Str. 50
83301 Traunreut, Germany
Tel. +49 8669 330
sports@siteco.com

SITECO Marketing 07/2023 | technical modifications and errors reserved.