

sITeCO



NEW

# Highbay 11

Built for Extremes.

# Reinvented. No Compromises.

Forget everything you knew about industrial lighting. With Highbay 11, we are redefining industrial lighting. Our revolutionary design sets completely new standards and surpasses all previous benchmarks. Unmatched efficiency and sustainability meet maximum light output and extreme temperature resistance.

## Highbay 11 – A Quantum Leap in Industrial Lighting.

Up to  
**211**  
lm/W

### Efficient.

With up to 211 lm/W for low energy costs and quick payback. Designed for decades of reliability – perfect for long-term savings.



to  
**-40** °C  
**+70** °C

### Temperature Resistant.

Reliable performance from freezing cold to scorching heat. Suitable for temperatures from -40 °C to +70 °C.

**50** % lighter

### Ultralight.

For easy transport, fast installation, and safe handling – even at great heights.

Made in

**Traunreut**

**Sustainable.**

Minimal material usage and recyclable components are environmentally friendly. The modular design allows for easy maintenance. Manufactured in Germany, delivered quickly and sustainably.



**100,000** h

**Durable & Robust.**

Impressive lifespan of 100,000 hours, even at maximum ambient temperature. A true workhorse in demanding environments.

Technical modifications and errors reserved.

Built for  
Extremes.



Ideal for high ceilings and harsh environments: Highbay 11 reliably illuminates heights from 6 to 30 meters and withstands extreme temperatures from -40 °C to +70 °C. Perfect for large assembly and production halls, high-bay warehouses, logistics centers, as well as the steel, automotive and food industries.

**Highbay 11 – When It Matters.**

# Highbay 11 at a glance.

## Highbay 11 sizes:



**Highbay 11 M**

### Technical Specifications

Dimensions: 474 mm × 442 mm × 72 mm


Weight: 4 kg

Luminous Flux: 10,000 ... 32,000 lm

Luminous Efficacy: up to 211 lm/W

Temperature Range: -40 °C ... +70 °C

Rated Lifetime: 100,000 hours L90/B50

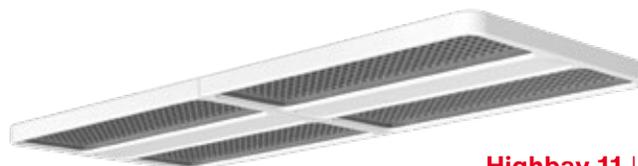

**Highbay 11 L**

### Technical Specifications

Dimensions: 946 mm × 442 mm × 72 mm

Weight: 8 kg

Luminous Flux: 20,000 ... 64,000 lm

Luminous Efficacy: up to 211 lm/W

Temperature Range: -40 °C ... +65 °C

Rated Lifetime: 100,000 hours L90/B50

### General Technical Specifications (applicable to all sizes)

Colour Temperature: 3,000 K | 4,000 K | 5,000 K | 6,500 K | TW

Colour Rendering Index: CRI ≥ 80 | CRI ≥ 90

Beam Angle: direct, narrow-beam | wide-beam

Cover: PMMA


Control: DALI 2

Electrical Connection: External terminal, 5-pin, max. 2.5 mm<sup>2</sup>

Housing: Glass fiber reinforced plastic, traffic white (RAL 9016) or deep black (RAL 9005), steel sheet

Mounting: Suspended installation, on chain | on wire | surface-mounted, on the ceiling | in trunking system

Certifications: Ball impact resistance | IFS/HACCP | LABS-free



## Contact.

### Siteco GmbH

Georg-Simon-Ohm-Str. 50  
83301 Traunreut, Deutschland  
Tel. +49 8669 330  
info@siteco.de

### Technical Support

Tel. +49 8669 338 44  
technicalsupport@siteco.de

### Product Management

Alexander Reuss  
Tel. +49 8669 33 820  
a.reuss@siteco.de

siteco.com