

## Photometric test report

**Family**  
**Highbay 21**

**Order number: 52HN12DB4TLA**  
**EAN: 4069025394859**

**LP number**  
**59723\_88**

**serial**  
**documentation**  
**27.02.2025**



**Version** primary light control with lens, PMMA, housing, white, for Licross® rail, wide distribution

**Lamps** LED 4000 K | CRI ≥ 80

**Controlgear** ECG-DALI

**Rated values** Net luminous flux = 53000 lm  
Power consumption = 286.6 W  
Luminous efficacy = 184.9 lm/W


**siteco**

**Luminous intensity in cd/klm**

**C180-0**

**C270-90**

**Imax: 920 cd/klm**

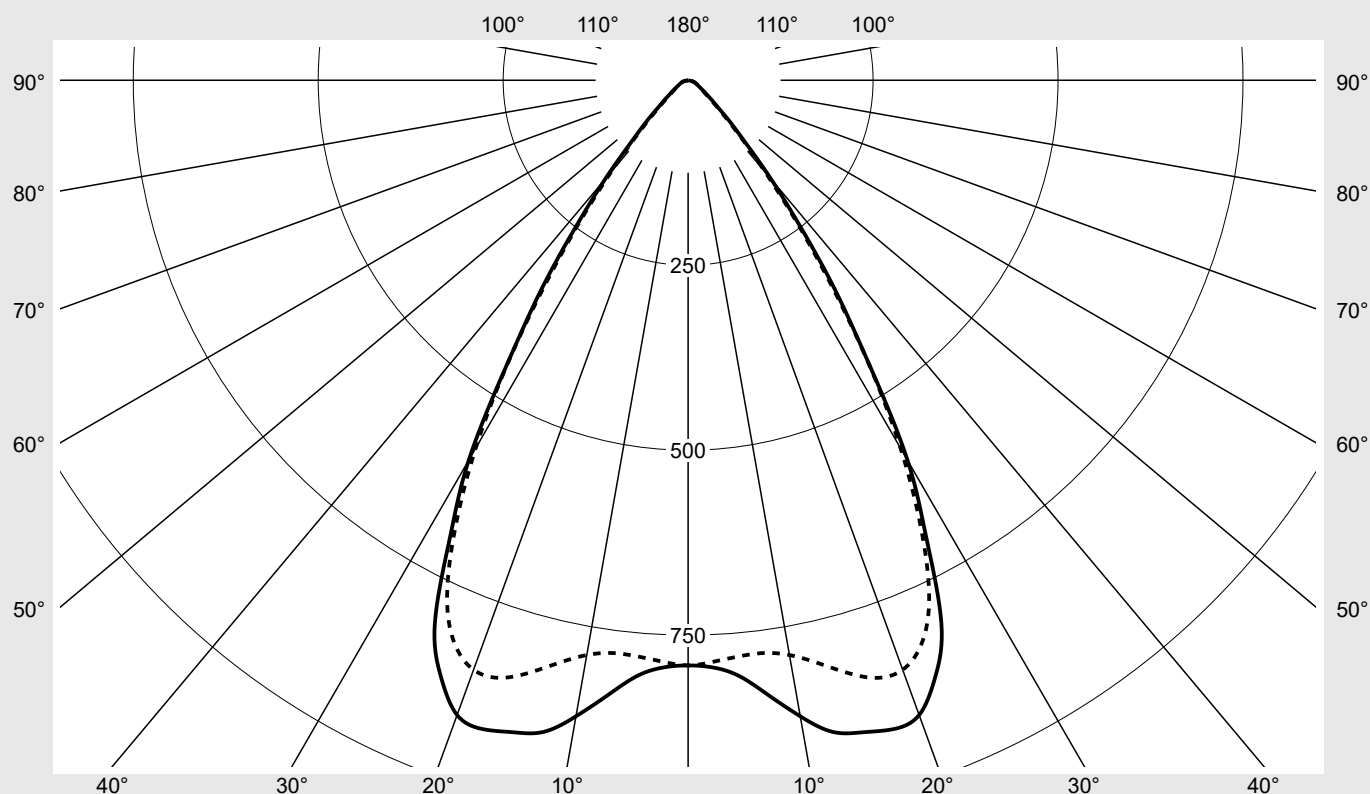

### Classifications

DIN 5040 A 7 0  
CIE N1=90 N2=98 N3=100  
N4=100 N5=100

### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  100.0%  
 $\phi_o$  0.0%

### Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

|                                          |                                                  |                            |
|------------------------------------------|--------------------------------------------------|----------------------------|
| Family<br>Highbay 21                     | Order number: 52HN12DB4TLA<br>EAN: 4069025394859 | LP number<br>59723_88      |
| Table of values for luminous intensities |                                                  | Maximum luminous intensity |
|                                          |                                                  | siteco                     |

| C-<br>planes | 0,0°<br>180,0°               | 7,5°<br>172,5°<br>187,5°<br>352,5° | 15,0°<br>165,0°<br>195,0°<br>345,0° | 22,5°<br>157,5°<br>202,5°<br>337,5° | 30,0°<br>150,0°<br>210,0°<br>330,0° | 37,5°<br>142,5°<br>217,5°<br>322,5° | 45,0°<br>135,0°<br>225,0°<br>315,0° |
|--------------|------------------------------|------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| γ            | Luminous intensity in cd/klm |                                    |                                     |                                     |                                     |                                     |                                     |
| 0,0°         | 791.0                        | 791.0                              | 791.0                               | 791.0                               | 791.0                               | 791.0                               | 791.0                               |
| 2,5°         | 794.7                        | 794.4                              | 795.0                               | 795.0                               | 794.2                               | 792.8                               | 792.0                               |
| 5,0°         | 809.1                        | 811.4                              | 809.6                               | 807.9                               | 804.8                               | 800.8                               | 797.1                               |
| 7,5°         | 839.0                        | 837.9                              | 835.9                               | 831.3                               | 824.9                               | 817.3                               | 810.1                               |
| 10,0°        | 873.0                        | 873.9                              | 866.7                               | 857.6                               | 846.5                               | 834.6                               | 825.0                               |
| 12,5°        | 902.2                        | 899.8                              | 892.6                               | 881.8                               | 868.2                               | 853.9                               | 842.5                               |
| 15,0°        | 912.4                        | 911.0                              | 905.2                               | 895.6                               | 883.1                               | 869.5                               | 858.7                               |
| 17,5°        | 919.8                        | 918.2                              | 913.1                               | 904.4                               | 892.7                               | 879.7                               | 870.3                               |
| 20,0°        | 913.1                        | 910.4                              | 906.8                               | 900.7                               | 891.6                               | 880.0                               | 870.9                               |
| 22,5°        | 873.0                        | 875.7                              | 872.3                               | 868.8                               | 863.2                               | 854.7                               | 847.2                               |
| 25,0°        | 810.1                        | 803.4                              | 805.6                               | 804.0                               | 800.6                               | 794.9                               | 789.9                               |
| 27,5°        | 697.5                        | 704.9                              | 702.5                               | 701.8                               | 699.9                               | 697.0                               | 693.3                               |
| 30,0°        | 593.2                        | 587.4                              | 585.8                               | 584.9                               | 582.5                               | 580.2                               | 578.9                               |
| 32,5°        | 456.1                        | 464.3                              | 462.1                               | 462.0                               | 458.3                               | 454.5                               | 453.6                               |
| 35,0°        | 347.7                        | 343.4                              | 342.9                               | 343.5                               | 340.5                               | 335.4                               | 333.2                               |
| 37,5°        | 248.6                        | 249.1                              | 246.7                               | 247.3                               | 245.8                               | 241.7                               | 237.9                               |
| 40,0°        | 174.7                        | 169.8                              | 171.0                               | 172.0                               | 172.0                               | 169.5                               | 166.1                               |
| 42,5°        | 115.9                        | 118.7                              | 117.3                               | 118.1                               | 118.9                               | 118.2                               | 116.5                               |
| 45,0°        | 82.2                         | 79.8                               | 80.4                                | 81.1                                | 81.3                                | 81.6                                | 80.9                                |
| 47,5°        | 56.5                         | 57.6                               | 57.2                                | 57.7                                | 57.6                                | 57.9                                | 57.5                                |
| 50,0°        | 42.4                         | 41.3                               | 41.7                                | 42.1                                | 42.1                                | 42.1                                | 42.0                                |
| 52,5°        | 32.0                         | 31.8                               | 31.7                                | 32.2                                | 32.5                                | 32.7                                | 32.7                                |
| 55,0°        | 25.6                         | 24.9                               | 25.0                                | 25.6                                | 26.1                                | 26.6                                | 26.9                                |
| 57,5°        | 20.6                         | 20.3                               | 20.3                                | 20.8                                | 21.4                                | 22.1                                | 22.4                                |
| 60,0°        | 17.2                         | 16.8                               | 16.6                                | 17.2                                | 18.2                                | 18.6                                | 18.9                                |
| 62,5°        | 14.5                         | 14.3                               | 13.9                                | 14.3                                | 15.3                                | 15.8                                | 16.0                                |
| 65,0°        | 13.1                         | 12.5                               | 12.0                                | 12.2                                | 13.0                                | 13.5                                | 13.7                                |
| 67,5°        | 11.1                         | 10.9                               | 10.3                                | 10.4                                | 11.4                                | 11.4                                | 11.5                                |
| 70,0°        | 9.4                          | 9.0                                | 8.7                                 | 8.7                                 | 9.6                                 | 9.3                                 | 9.5                                 |
| 72,5°        | 7.6                          | 7.5                                | 7.3                                 | 7.2                                 | 7.3                                 | 7.4                                 | 7.8                                 |
| 75,0°        | 5.9                          | 5.7                                | 5.6                                 | 5.7                                 | 5.6                                 | 5.7                                 | 6.1                                 |
| 77,5°        | 4.1                          | 4.1                                | 4.1                                 | 4.2                                 | 4.1                                 | 4.2                                 | 4.5                                 |
| 80,0°        | 2.6                          | 2.5                                | 2.5                                 | 2.7                                 | 2.7                                 | 2.8                                 | 2.9                                 |
| 82,5°        | 1.1                          | 1.2                                | 1.2                                 | 1.3                                 | 1.5                                 | 1.5                                 | 1.7                                 |
| 85,0°        | 0.5                          | 0.5                                | 0.5                                 | 0.5                                 | 0.5                                 | 0.5                                 | 0.6                                 |
| 87,5°        | 0.2                          | 0.3                                | 0.3                                 | 0.3                                 | 0.3                                 | 0.3                                 | 0.3                                 |

Photometric test report

|                                          |                                                  |                            |
|------------------------------------------|--------------------------------------------------|----------------------------|
| Family<br>Highbay 21                     | Order number: 52HN12DB4TLA<br>EAN: 4069025394859 | LP number<br>59723_88      |
| Table of values for luminous intensities |                                                  | Maximum luminous intensity |
|                                          |                                                  | siteco                     |

| C-<br>planes | 52,5°<br>127,5°<br>232,5°<br>307,5° | 60,0°<br>120,0°<br>240,0°<br>300,0° | 67,5°<br>112,5°<br>247,5°<br>292,5° | 75,0°<br>105,0°<br>255,0°<br>285,0° | 82,5°<br>97,5°<br>262,5°<br>277,5° | 90,0°<br>270,0° | Phi-zone                | Total<br>Phi-zone |
|--------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|-----------------|-------------------------|-------------------|
| γ            | Luminous intensity in cd/klm        |                                     |                                     |                                     |                                    |                 | Luminous flux in lm/klm |                   |
| 0,0°         | 791.0                               | 791.0                               | 791.0                               | 791.0                               | 791.0                              | 791.0           | 1.2                     | 1.2               |
| 2,5°         | 791.3                               | 790.7                               | 790.0                               | 789.4                               | 788.0                              | 786.7           | 9.5                     | 10.7              |
| 5,0°         | 794.2                               | 790.9                               | 788.1                               | 786.0                               | 783.2                              | 781.9           | 19.1                    | 29.7              |
| 7,5°         | 803.7                               | 797.3                               | 791.2                               | 786.8                               | 782.5                              | 780.9           | 29.0                    | 58.7              |
| 10,0°        | 816.7                               | 808.7                               | 801.4                               | 796.1                               | 791.2                              | 788.9           | 39.5                    | 98.2              |
| 12,5°        | 833.0                               | 825.3                               | 818.6                               | 813.6                               | 808.7                              | 806.6           | 50.4                    | 148.6             |
| 15,0°        | 850.7                               | 844.9                               | 836.9                               | 832.9                               | 831.6                              | 829.0           | 61.4                    | 210.0             |
| 17,5°        | 864.2                               | 859.8                               | 856.6                               | 853.6                               | 849.6                              | 847.0           | 72.4                    | 282.5             |
| 20,0°        | 864.8                               | 860.1                               | 856.9                               | 853.9                               | 850.4                              | 848.0           | 82.3                    | 364.7             |
| 22,5°        | 841.4                               | 836.7                               | 833.2                               | 829.7                               | 826.8                              | 824.5           | 89.2                    | 453.9             |
| 25,0°        | 786.0                               | 782.5                               | 779.1                               | 775.6                               | 772.9                              | 771.0           | 91.6                    | 545.4             |
| 27,5°        | 691.2                               | 689.6                               | 687.4                               | 684.8                               | 682.7                              | 681.4           | 87.8                    | 633.3             |
| 30,0°        | 578.6                               | 579.1                               | 578.3                               | 576.4                               | 575.3                              | 574.3           | 79.6                    | 712.9             |
| 32,5°        | 454.5                               | 456.7                               | 457.0                               | 455.4                               | 454.6                              | 454.3           | 67.4                    | 780.2             |
| 35,0°        | 335.0                               | 337.7                               | 338.0                               | 336.6                               | 336.0                              | 336.2           | 53.3                    | 833.5             |
| 37,5°        | 239.3                               | 241.4                               | 241.0                               | 239.6                               | 239.1                              | 239.2           | 40.5                    | 874.0             |
| 40,0°        | 166.2                               | 166.4                               | 164.7                               | 163.3                               | 162.9                              | 163.0           | 29.6                    | 903.6             |
| 42,5°        | 115.3                               | 113.5                               | 111.1                               | 110.0                               | 109.8                              | 109.7           | 21.3                    | 924.9             |
| 45,0°        | 79.0                                | 76.9                                | 75.1                                | 74.3                                | 74.0                               | 73.9            | 15.2                    | 940.1             |
| 47,5°        | 56.0                                | 54.4                                | 53.1                                | 52.3                                | 51.9                               | 51.7            | 11.2                    | 951.3             |
| 50,0°        | 40.9                                | 39.8                                | 38.8                                | 38.0                                | 37.5                               | 37.4            | 8.5                     | 959.8             |
| 52,5°        | 31.8                                | 30.8                                | 29.9                                | 29.1                                | 28.8                               | 28.7            | 6.8                     | 966.6             |
| 55,0°        | 25.9                                | 25.0                                | 24.2                                | 23.4                                | 23.2                               | 23.3            | 5.6                     | 972.3             |
| 57,5°        | 21.7                                | 20.8                                | 20.1                                | 19.5                                | 19.4                               | 19.6            | 4.8                     | 977.0             |
| 60,0°        | 18.6                                | 18.0                                | 17.1                                | 16.6                                | 16.8                               | 17.1            | 4.2                     | 981.2             |
| 62,5°        | 16.0                                | 15.6                                | 14.7                                | 14.4                                | 14.7                               | 15.1            | 3.6                     | 984.8             |
| 65,0°        | 14.0                                | 13.6                                | 12.8                                | 12.7                                | 13.1                               | 13.5            | 3.2                     | 988.1             |
| 67,5°        | 12.0                                | 12.1                                | 11.2                                | 11.1                                | 11.6                               | 12.1            | 2.9                     | 991.0             |
| 70,0°        | 9.8                                 | 10.4                                | 9.7                                 | 9.7                                 | 10.2                               | 10.6            | 2.5                     | 993.4             |
| 72,5°        | 7.8                                 | 8.3                                 | 8.3                                 | 8.3                                 | 8.8                                | 9.1             | 2.1                     | 995.5             |
| 75,0°        | 6.2                                 | 6.3                                 | 6.8                                 | 6.9                                 | 7.3                                | 7.6             | 1.6                     | 997.1             |
| 77,5°        | 4.6                                 | 4.9                                 | 5.3                                 | 5.5                                 | 5.8                                | 6.0             | 1.3                     | 998.4             |
| 80,0°        | 3.1                                 | 3.4                                 | 3.7                                 | 4.0                                 | 4.2                                | 4.4             | 0.9                     | 999.2             |
| 82,5°        | 1.8                                 | 2.1                                 | 2.4                                 | 2.6                                 | 2.8                                | 2.9             | 0.5                     | 999.7             |
| 85,0°        | 0.7                                 | 1.0                                 | 1.2                                 | 1.3                                 | 1.6                                | 1.6             | 0.2                     | 1000.0            |
| 87,5°        | 0.3                                 | 0.3                                 | 0.3                                 | 0.3                                 | 0.4                                | 0.4             | 0.1                     | 1000.0            |

Photometric test report

|                              |     |                     |                                                  |      |      |      |                    |      |      |                       |      |
|------------------------------|-----|---------------------|--------------------------------------------------|------|------|------|--------------------|------|------|-----------------------|------|
| Family<br>Highbay 21         |     |                     | Order number: 52HN12DB4TLA<br>EAN: 4069025394859 |      |      |      |                    |      |      | LP number<br>59723_88 |      |
| UGR-Table                    |     |                     | Standard room                                    |      |      |      |                    |      |      | siteco                |      |
| Reflection factor of ceiling | 0.7 | 0.7                 | 0.5                                              | 0.5  | 0.3  | 0.7  | 0.7                | 0.5  | 0.5  | 0.3                   |      |
| Reflection factor of walls   | 0.5 | 0.3                 | 0.5                                              | 0.3  | 0.3  | 0.5  | 0.3                | 0.5  | 0.3  | 0.3                   |      |
| Reflection factor of floor   | 0.2 | 0.2                 | 0.2                                              | 0.2  | 0.2  | 0.2  | 0.2                | 0.2  | 0.2  | 0.2                   |      |
| Room dimensions              |     | View crosswise (C0) |                                                  |      |      |      | View endwise (C90) |      |      |                       |      |
| x                            | y   |                     |                                                  |      |      |      |                    |      |      |                       |      |
| 2H                           | 2H  | 20.3                | 21.6                                             | 20.7 | 21.9 | 22.2 | 20.2               | 21.4 | 20.5 | 21.7                  | 22.0 |
|                              | 3H  | 20.4                | 21.4                                             | 20.8 | 21.8 | 22.1 | 20.2               | 21.3 | 20.6 | 21.6                  | 22.0 |
|                              | 4H  | 20.4                | 21.4                                             | 20.8 | 21.7 | 22.1 | 20.3               | 21.3 | 20.7 | 21.6                  | 22.0 |
|                              | 6H  | 20.4                | 21.3                                             | 20.8 | 21.6 | 22.0 | 20.3               | 21.2 | 20.7 | 21.6                  | 22.0 |
|                              | 8H  | 20.5                | 21.2                                             | 20.9 | 21.6 | 22.0 | 20.5               | 21.2 | 20.9 | 21.6                  | 22.0 |
|                              | 12H | 20.4                | 21.1                                             | 20.9 | 21.5 | 21.9 | 20.5               | 21.1 | 20.9 | 21.5                  | 21.9 |
| 4H                           | 2H  | 20.2                | 21.2                                             | 20.6 | 21.6 | 22.0 | 20.1               | 21.1 | 20.5 | 21.4                  | 21.8 |
|                              | 3H  | 20.3                | 21.1                                             | 20.8 | 21.5 | 21.9 | 20.2               | 21.0 | 20.6 | 21.4                  | 21.8 |
|                              | 4H  | 20.4                | 21.1                                             | 20.8 | 21.5 | 21.9 | 20.3               | 21.0 | 20.7 | 21.4                  | 21.9 |
|                              | 6H  | 20.3                | 21.0                                             | 20.8 | 21.4 | 21.9 | 20.4               | 21.0 | 20.9 | 21.4                  | 21.9 |
|                              | 8H  | 20.3                | 20.9                                             | 20.8 | 21.3 | 21.8 | 20.4               | 21.0 | 20.9 | 21.4                  | 21.9 |
|                              | 12H | 20.3                | 20.8                                             | 20.8 | 21.2 | 21.7 | 20.5               | 20.9 | 21.0 | 21.4                  | 21.9 |
| 8H                           | 4H  | 20.3                | 20.9                                             | 20.8 | 21.3 | 21.8 | 20.3               | 20.8 | 20.7 | 21.3                  | 21.7 |
|                              | 6H  | 20.3                | 20.7                                             | 20.8 | 21.2 | 21.7 | 20.4               | 20.8 | 20.9 | 21.3                  | 21.8 |
|                              | 8H  | 20.3                | 20.7                                             | 20.8 | 21.1 | 21.7 | 20.4               | 20.8 | 20.9 | 21.3                  | 21.8 |
|                              | 12H | 20.3                | 20.6                                             | 20.8 | 21.1 | 21.6 | 20.4               | 20.7 | 21.0 | 21.2                  | 21.8 |
| 12H                          | 4H  | 20.3                | 20.8                                             | 20.8 | 21.2 | 21.7 | 20.3               | 20.7 | 20.8 | 21.2                  | 21.7 |
|                              | 6H  | 20.3                | 20.7                                             | 20.8 | 21.1 | 21.7 | 20.4               | 20.7 | 20.9 | 21.2                  | 21.7 |
|                              | 8H  | 20.3                | 20.6                                             | 20.8 | 21.1 | 21.6 | 20.4               | 20.7 | 20.9 | 21.2                  | 21.7 |

| Luminance table |                | Max. for $\gamma \geq 65^\circ$     |                                     |                                     | Photometric<br>dimensions in mm:    |                                     | L = 852<br>B = 264                  |                                     |                                     |                 |         |
|-----------------|----------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-----------------|---------|
| C-<br>planes    | 0,0°<br>180,0° | 10,0°<br>170,0°<br>190,0°<br>350,0° | 20,0°<br>160,0°<br>200,0°<br>340,0° | 30,0°<br>150,0°<br>210,0°<br>330,0° | 40,0°<br>140,0°<br>220,0°<br>320,0° | 50,0°<br>130,0°<br>230,0°<br>310,0° | 60,0°<br>120,0°<br>240,0°<br>300,0° | 70,0°<br>110,0°<br>250,0°<br>290,0° | 80,0°<br>100,0°<br>260,0°<br>280,0° | 90,0°<br>270,0° |         |
|                 |                | Luminance in cd/m²                  |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                 |         |
| $\gamma$        |                |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                 |         |
| 45,0°           |                | 27401.4                             | 26553.3                             | 26952.3                             | 27102.1                             | 27158.0                             | 26553.9                             | 25610.6                             | 24909.8                             | 24678.8         | 24610.9 |
| 50,0°           |                | 15544.3                             | 15116.0                             | 15399.0                             | 15434.3                             | 15432.2                             | 15139.6                             | 14596.0                             | 14110.9                             | 13802.8         | 13694.6 |
| 55,0°           |                | 10524.1                             | 10216.2                             | 10443.5                             | 10710.2                             | 10997.9                             | 10787.2                             | 10253.4                             | 9825.1                              | 9557.4          | 9589.9  |
| 60,0°           |                | 8096.8                              | 7863.3                              | 7995.7                              | 8560.0                              | 8829.0                              | 8814.5                              | 8491.2                              | 7971.1                              | 7878.5          | 8043.5  |
| 65,0°           |                | 7285.5                              | 6862.0                              | 6714.8                              | 7267.7                              | 7601.8                              | 7818.8                              | 7598.9                              | 7088.5                              | 7218.8          | 7541.4  |
| 70,0°           |                | 6502.9                              | 6141.6                              | 5942.3                              | 6582.1                              | 6438.1                              | 6679.6                              | 7147.1                              | 6651.0                              | 6914.9          | 7329.6  |
| 75,0°           |                | 5347.7                              | 5162.4                              | 5186.2                              | 5133.8                              | 5291.6                              | 5592.9                              | 5764.7                              | 6277.8                              | 6520.9          | 6919.1  |
| 80,0°           |                | 3487.3                              | 3375.8                              | 3591.7                              | 3726.2                              | 3788.3                              | 4141.1                              | 4610.9                              | 5214.6                              | 5604.3          | 5933.9  |
| 85,0°           |                | 1362.6                              | 1328.4                              | 1350.6                              | 1357.2                              | 1484.0                              | 1870.6                              | 2636.0                              | 3282.4                              | 4025.0          | 4387.9  |

Photometric test report

Family  
Highbay 21

Order number: 52HN12DB4TLA  
EAN: 4069025394859

LP number  
59723\_88

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

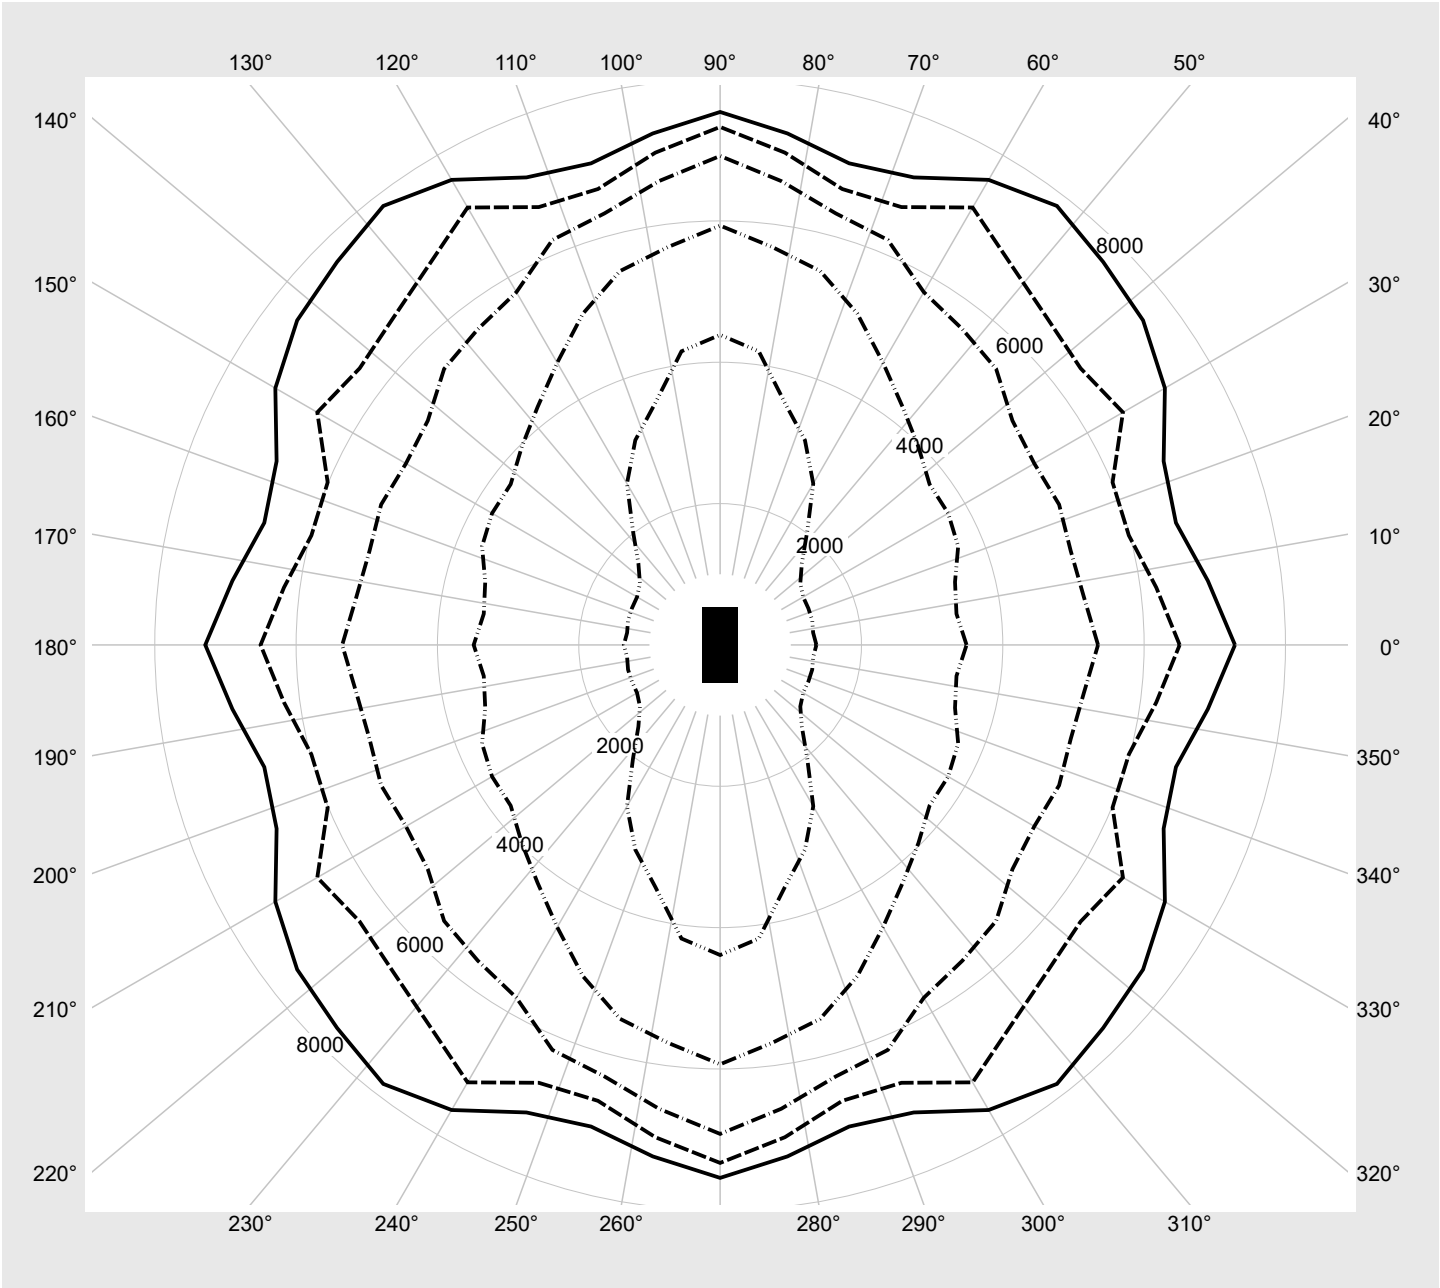

Photometric test report

|                      |                                                  |                                 |
|----------------------|--------------------------------------------------|---------------------------------|
| Family<br>Highbay 21 | Order number: 52HN12DB4TLA<br>EAN: 4069025394859 | LP number<br>59723_88           |
| Dimming levels table |                                                  | environmental temperature: 25°C |



| Luminous flux<br>[%] | Dimming level<br>linear | Dimming level<br>logarithmic | Luminous flux<br>[lm] | Power consumption<br>[W] |
|----------------------|-------------------------|------------------------------|-----------------------|--------------------------|
| 100                  | 254                     | 254                          | 53000                 | 286.6                    |
| 95                   | 240                     | 252                          | 50315                 | 270.4                    |
| 90                   | 227                     | 250                          | 47747                 | 255.4                    |
| 85                   | 213                     | 248                          | 44996                 | 239.3                    |
| 80                   | 200                     | 245                          | 42396                 | 224.4                    |
| 75                   | 187                     | 243                          | 39781                 | 209.7                    |
| 70                   | 174                     | 240                          | 37143                 | 195.0                    |
| 65                   | 161                     | 237                          | 34482                 | 180.2                    |
| 60                   | 148                     | 234                          | 31789                 | 165.6                    |
| 55                   | 135                     | 231                          | 29085                 | 151.1                    |
| 50                   | 123                     | 227                          | 26576                 | 137.7                    |
| 45                   | 110                     | 223                          | 23848                 | 123.3                    |
| 40                   | 97                      | 219                          | 21094                 | 108.7                    |
| 35                   | 85                      | 214                          | 18527                 | 95.5                     |
| 30                   | 73                      | 208                          | 15952                 | 82.5                     |
| 25                   | 60                      | 201                          | 13142                 | 68.4                     |
| 20                   | 48                      | 193                          | 10520                 | 55.4                     |
| 15                   | 36                      | 182                          | 7886                  | 42.5                     |
| 10                   | 24                      | 168                          | 5241                  | 29.5                     |
| 5                    | 12                      | 142                          | 2576                  | 16.0                     |
| 2                    | 5                       | 110                          | 1018                  | 8.1                      |