


# Photometric test report

<b>Family</b> Lunis micro square	<b>Order number:</b> 51DE11B71FF22 + 59DL10000200E00DB <b>EAN:</b> 4058352107898 + 4058352127438	<b>LP number</b> 57963_1
<b>Version</b>	prismatic diffuser, darklight reflector, highly specular, narrow distribution, cover panel, IP54, transparent	<b>serial documentation</b> 15.02.2018
<b>Lamps</b>	LED 3000K / CRI ≥ 80	
<b>Controlgear</b>	ECG	
<b>Rated values</b>	Net luminous flux = 990 lm Power consumption = 10.4 W Luminous efficacy = 95.2 lm/W	



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 1574 cd/klm**

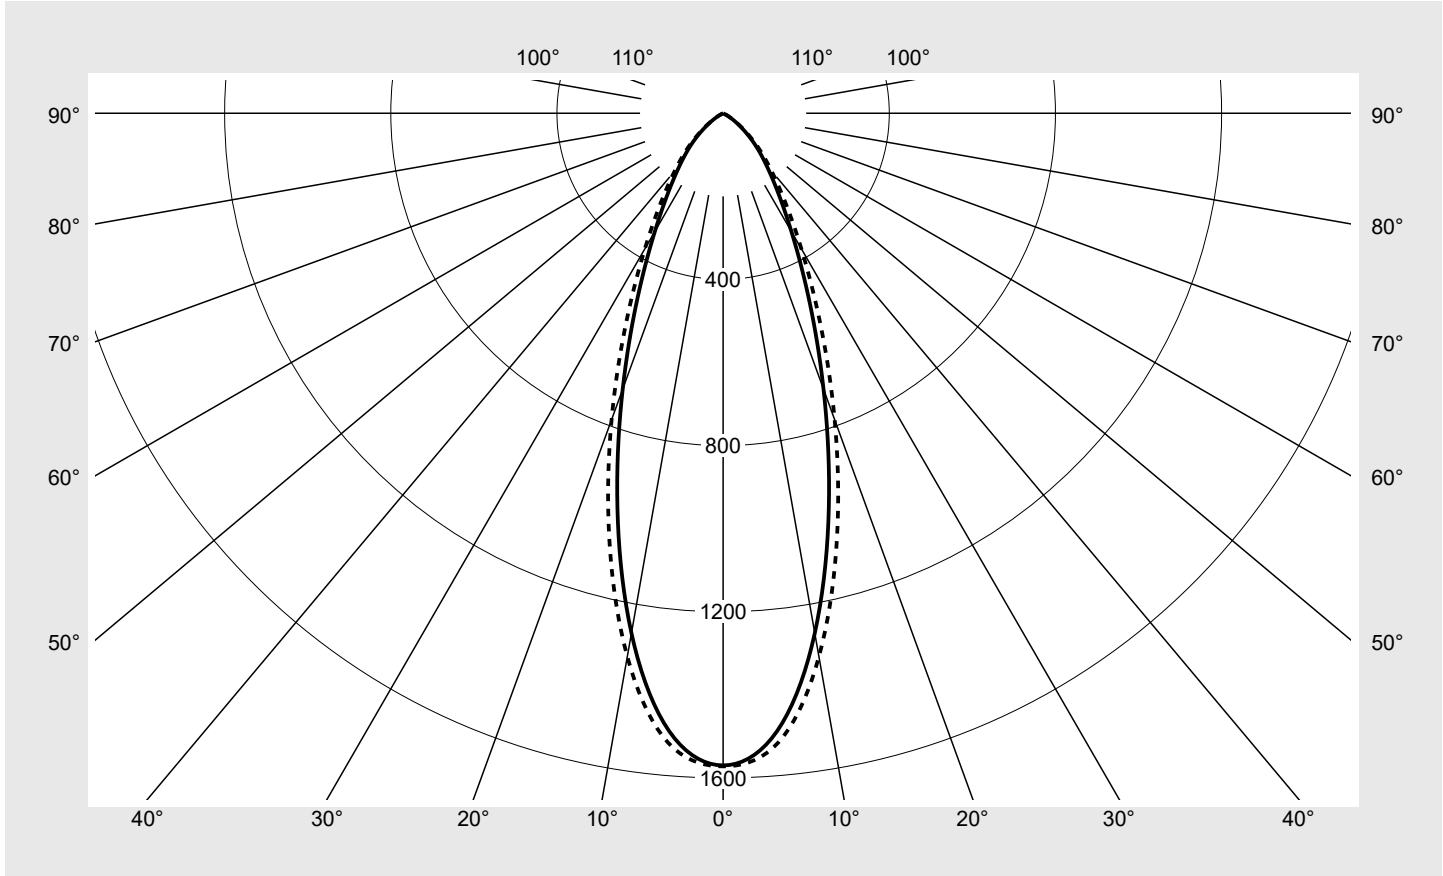

Classifications	
DIN 5040	A 7 0
CIE	N1=87 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Lunis micro square	<b>Order number: 51DE11B71FF22 + 59DL10000200E00DB</b> <b>EAN: 4058352107898 + 4058352127438</b>	<b>LP number</b> 57963_1
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	1569.9	1570.6	1569.5	1573.7	1571.0	1574.4	1572.2	9.4	9.4
5°	1492.8	1489.5	1511.4	1511.4	1530.0	1523.2	1520.9	72.2	81.6
10°	1270.8	1270.4	1309.9	1313.0	1344.4	1333.5	1328.1	124.9	206.5
15°	983.1	986.9	1038.5	1047.2	1082.1	1065.4	1059.0	147.6	354.1
20°	706.8	718.1	775.8	788.4	817.6	795.9	784.9	145.0	499.1
25°	484.7	496.8	558.7	576.2	594.8	561.4	549.2	127.6	626.7
30°	328.7	341.2	394.4	414.5	421.3	388.7	376.5	105.6	732.3
35°	227.4	237.6	276.7	292.6	296.8	269.1	259.6	84.7	817.0
40°	160.6	168.5	194.7	206.5	208.4	189.0	181.0	66.8	883.9
45°	112.0	118.0	136.3	142.0	144.2	131.3	124.9	51.0	934.9
50°	69.8	74.4	88.4	88.4	93.4	83.1	77.1	35.1	970.0
55°	37.2	40.2	47.1	46.7	50.5	44.8	40.2	20.1	990.0
60°	14.8	15.2	18.2	17.5	19.7	17.8	15.9	8.2	998.2
65°	2.3	2.7	4.2	3.8	4.6	3.8	2.7	1.8	1000.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Lunis micro square	<b>Order number:</b> 51DE11B71FF22 + 59DL10000200E00DB <b>EAN:</b> 4058352107898 + 4058352127438	<b>LP number</b> 57963_1
-------------------------------------	---	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	18.9	20.1	19.3	20.4	20.7	19.5	20.7	19.8	21.0	21.3
	3H	18.7	19.8	19.1	20.1	20.5	19.3	20.4	19.7	20.7	21.1
	4H	18.7	19.6	19.1	20.0	20.4	19.3	20.2	19.7	20.6	20.9
	6H	18.6	19.5	19.0	19.8	20.2	19.2	20.0	19.6	20.4	20.8
	8H	18.7	19.4	19.1	19.8	20.2	19.3	20.0	19.7	20.3	20.8
	12H	18.6	19.3	19.1	19.7	20.1	19.2	19.9	19.6	20.3	20.7
4H	2H	18.8	19.7	19.2	20.1	20.5	19.3	20.3	19.7	20.6	21.0
	3H	18.6	19.4	19.0	19.8	20.2	19.2	20.0	19.6	20.3	20.8
	4H	18.5	19.2	19.0	19.6	20.1	19.1	19.8	19.5	20.2	20.6
	6H	18.4	19.0	18.9	19.4	19.9	19.0	19.6	19.4	20.0	20.5
	8H	18.4	18.9	18.9	19.4	19.8	18.9	19.5	19.4	19.9	20.4
	12H	18.4	18.8	18.9	19.3	19.8	18.9	19.3	19.4	19.8	20.3
8H	4H	18.4	18.9	18.9	19.4	19.8	18.9	19.5	19.4	19.9	20.4
	6H	18.3	18.7	18.8	19.2	19.7	18.8	19.2	19.3	19.7	20.2
	8H	18.2	18.6	18.7	19.1	19.6	18.8	19.1	19.3	19.6	20.2
	12H	18.2	18.5	18.7	19.0	19.5	18.7	19.0	19.2	19.5	20.1
12H	4H	18.4	18.8	18.9	19.3	19.8	18.9	19.3	19.4	19.8	20.3
	6H	18.2	18.6	18.8	19.1	19.6	18.8	19.1	19.3	19.6	20.2
	8H	18.2	18.5	18.7	19.0	19.5	18.7	19.0	19.2	19.5	20.1

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 82</b> <b>B = 82</b>
------------------------	---	--------------------------------------	--------------------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		23315.0	24578.3	28372.3	29558.5	30033.0	27346.2	26001.9	
50°		15997.2	17040.6	20257.4	20257.4	21387.6	19040.2	17649.2	
55°		9548.3	10327.8	12081.6	11984.0	12958.4	11496.8	10327.8	
60°		4359.0	4470.6	5364.9	5141.4	5811.9	5253.3	4694.4	
65°		793.3	925.7	1454.5	1322.5	1586.9	1322.5	925.7	
70°		0.0	0.0	0.0	0.0	0.0	0.0	0.0	
75°		0.0	0.0	0.0	0.0	0.0	0.0	0.0	
80°		0.0	0.0	0.0	0.0	0.0	0.0	0.0	
85°		0.0	0.0	0.0	0.0	0.0	0.0	0.0	

**Photometric test report**

<b>Family</b> Lunis micro square	<b>Order number:</b> 51DE11B71FF22 + 59DL10000200E00DB <b>EAN:</b> 4058352107898 + 4058352127438	<b>LP number</b> 57963_1
-------------------------------------	---	-----------------------------

**Luminance values in cd/m<sup>2</sup>**       $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

