


# Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
	<b>Version</b> post-top or side-entry mounting, Smart Interface up/down <b>Optic</b> asymmetric, wide distribution (STW1.0a G) <b>Cover</b> toughened safety glass <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> EVG SITECO iQ - Smart Interface <b>Rated values</b> Net luminous flux = 21550 lm Power consumption = 136.6 W Luminous efficacy = 157.8 lm/W	<b>serial documentation</b> <b>09.08.2023</b>



**Luminous intensity in cd/klm** C180-0 C200-20 C205-25 C270-90 **Imax: 535 cd/klm**

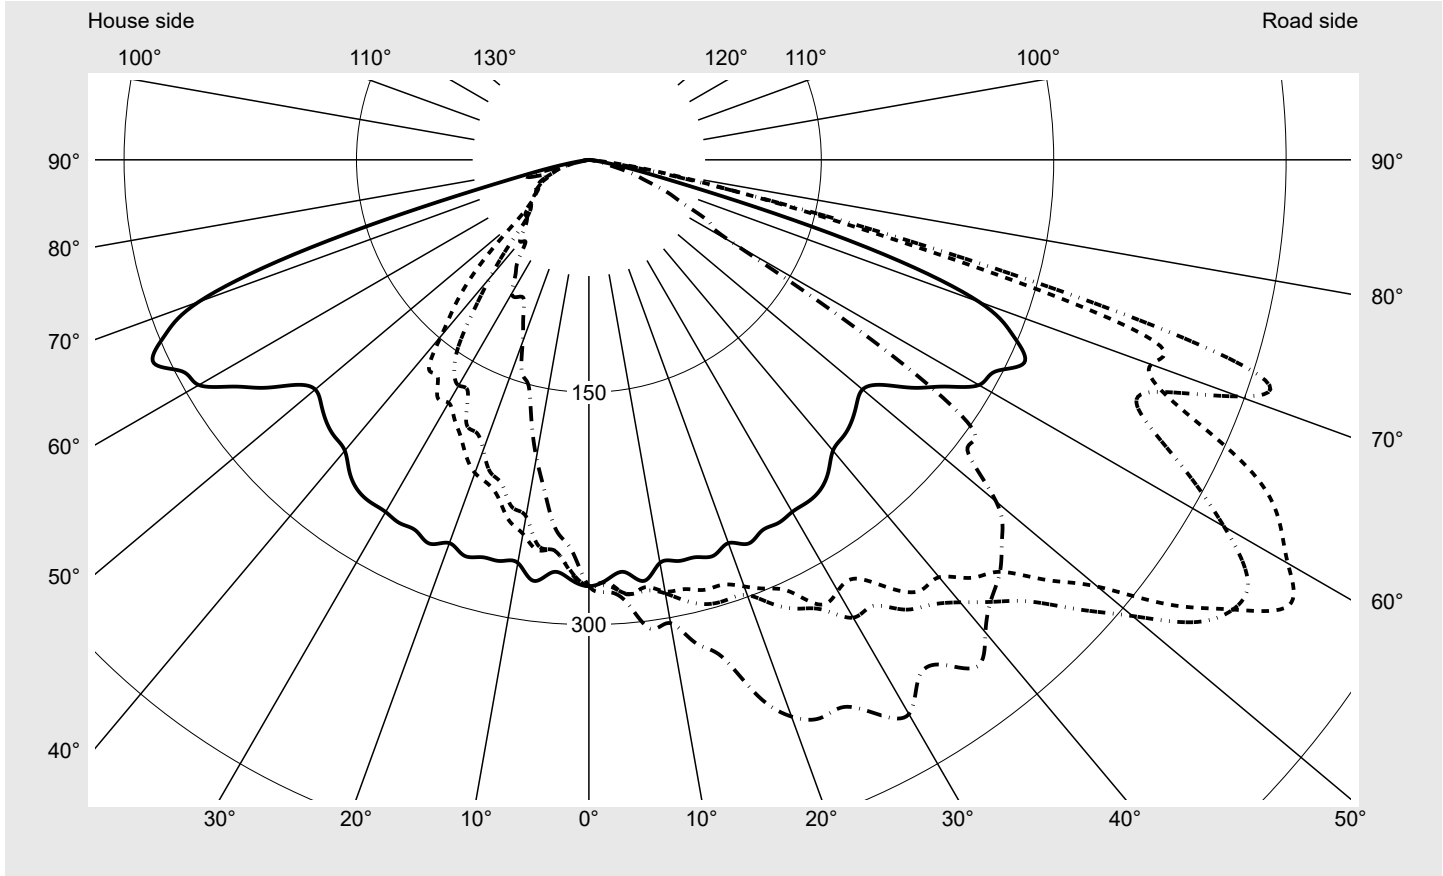

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G4
Imax 70°	486.3
Imax 80°	49.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
--	--	--------------------------------------

**Envelope curve in cd/klm**      **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**    **KMK 50°**      **siteco**

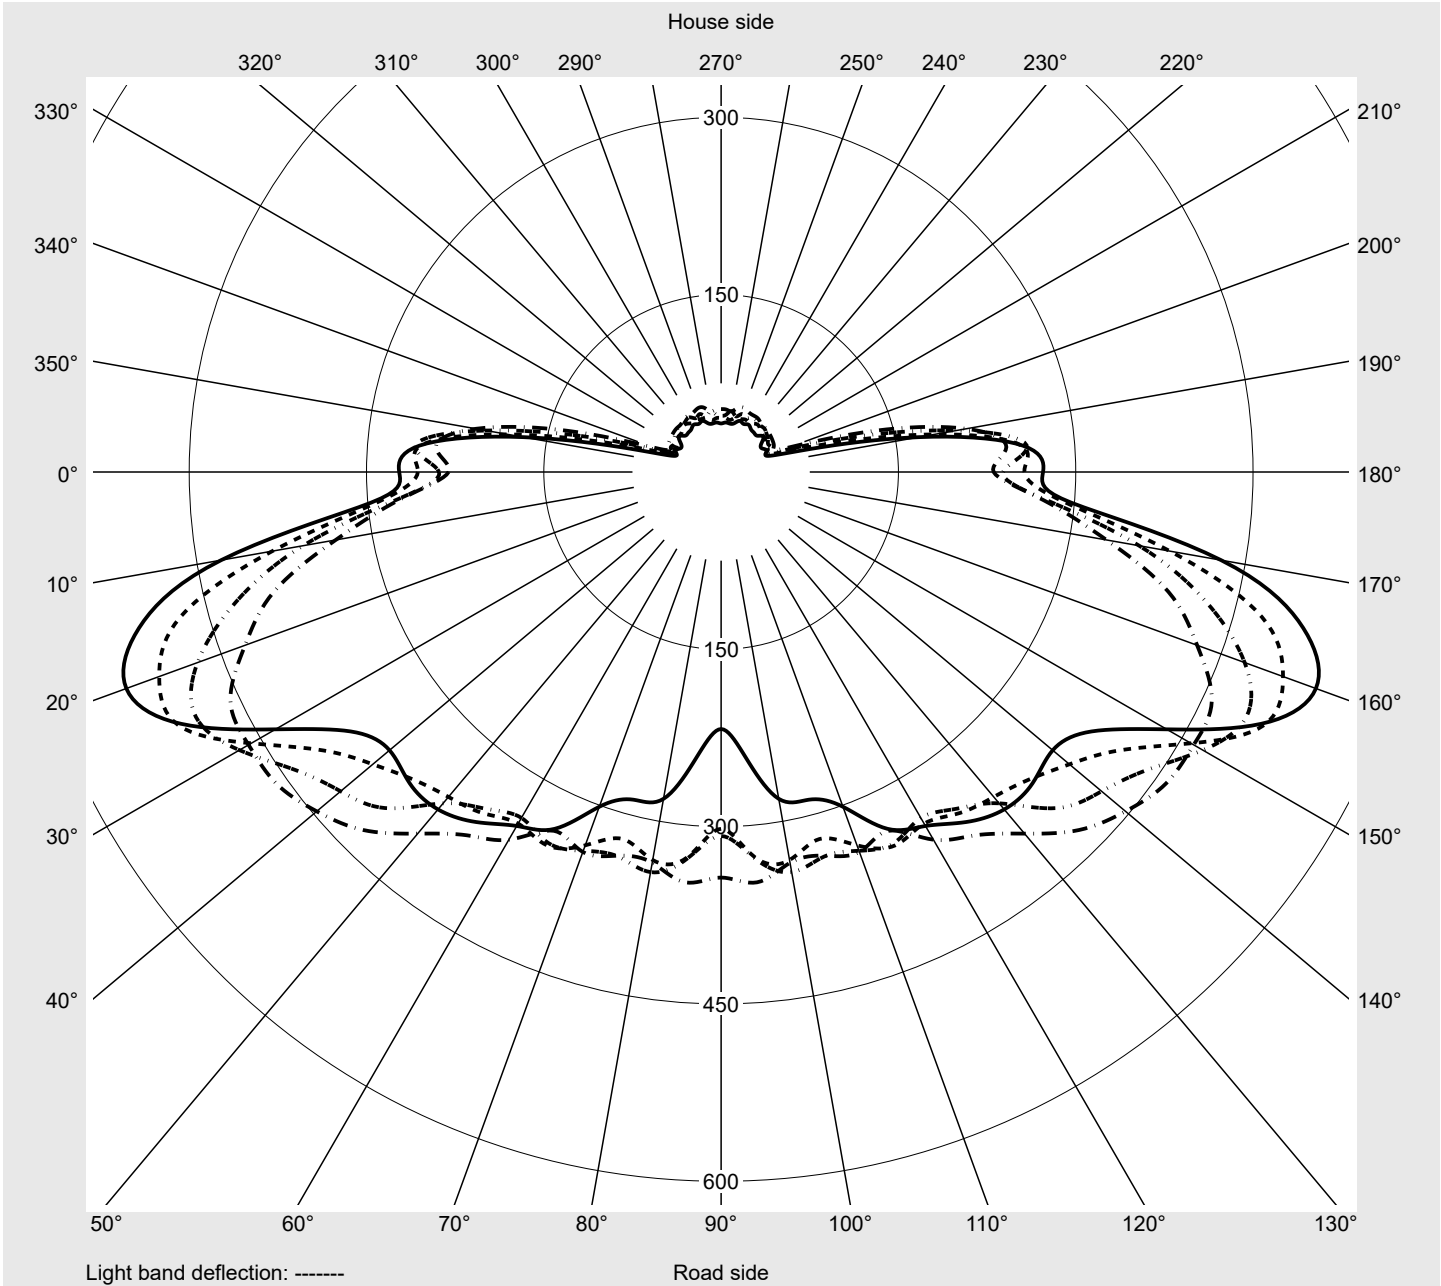

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2
2,5°	271.1	272.6	274.2	272.4	273.1	275.0	271.7	272.5	277.2	276.0	276.0	276.0	273.8
5,0°	267.1	272.9	275.2	280.1	281.5	281.2	280.8	282.7	283.1	284.1	282.6	285.7	289.7
7,5°	274.1	279.0	277.5	278.4	278.2	280.5	282.2	280.1	280.7	279.4	280.1	282.2	287.0
10,0°	264.1	267.7	274.1	281.5	282.9	284.1	284.6	289.0	288.4	289.8	289.4	296.1	298.5
12,5°	265.2	273.1	281.9	286.0	283.8	291.7	297.8	297.4	299.9	302.2	305.4	304.8	305.6
15,0°	265.5	268.6	273.1	278.4	287.3	296.8	296.7	300.7	302.2	302.6	306.1	317.4	327.7
17,5°	267.8	273.0	278.7	286.4	287.5	297.6	312.8	307.7	310.5	319.9	331.7	332.0	337.4
20,0°	263.2	276.0	283.2	285.6	293.0	298.9	314.1	316.9	322.0	337.8	350.9	349.4	357.5
22,5°	268.2	277.3	286.1	293.7	299.5	310.4	324.4	326.9	342.4	343.6	356.1	369.0	375.1
25,0°	264.1	279.2	290.5	304.6	307.6	319.6	332.9	339.3	354.0	370.6	376.6	388.5	394.7
27,5°	264.4	278.9	292.5	301.1	323.7	327.4	350.6	352.7	365.4	382.4	390.1	396.0	398.1
30,0°	262.4	282.1	299.4	304.0	321.3	341.2	351.9	364.5	376.7	390.8	402.8	403.1	399.6
32,5°	262.1	278.2	296.7	315.0	320.5	341.4	361.3	372.4	390.8	396.6	408.5	414.4	410.7
35,0°	260.2	274.8	293.4	320.6	337.1	354.3	370.4	374.9	395.6	416.3	417.7	425.9	434.6
37,5°	253.9	269.5	301.7	327.7	350.7	362.0	373.6	396.8	412.7	434.7	432.1	435.0	433.6
40,0°	245.1	278.1	306.0	330.0	351.7	372.8	391.4	402.6	422.5	443.3	435.7	438.1	439.9
42,5°	242.6	268.1	310.3	337.6	365.9	386.9	401.8	431.6	446.3	442.4	453.9	429.3	424.6
45,0°	239.5	273.8	302.3	342.4	376.0	403.2	431.8	441.1	452.0	463.2	443.3	420.5	405.7
47,5°	234.2	273.4	316.7	354.5	401.5	429.6	443.6	448.8	453.7	445.8	421.4	404.1	379.3
50,0°	230.6	273.9	331.1	391.8	428.6	458.0	461.6	459.4	446.6	428.3	399.3	375.2	359.2
52,5°	238.6	277.2	359.1	425.0	471.4	490.3	470.6	439.6	420.2	402.0	365.9	347.7	337.9
55,0°	256.6	291.5	385.6	473.5	505.9	506.7	459.0	410.7	384.7	368.1	358.8	352.1	343.4
57,5°	272.4	297.3	429.5	509.8	535.5	504.1	435.4	382.6	366.2	372.5	372.6	361.5	345.8
60,0°	290.7	312.9	440.7	516.1	520.9	473.3	391.3	379.2	399.9	420.5	391.2	362.4	336.3
62,5°	295.8	319.6	438.3	511.2	501.8	433.9	373.9	424.8	468.3	466.9	396.4	312.7	244.7
65,0°	310.0	306.1	414.0	482.8	468.6	395.4	406.6	503.6	507.9	477.9	351.8	231.9	136.1
67,5°	296.3	284.8	343.3	418.8	408.3	391.9	456.6	515.0	519.3	406.7	244.9	142.9	85.5
70,0°	267.9	221.9	267.0	347.6	386.2	446.6	482.2	486.3	474.1	299.8	141.0	105.2	59.3
72,5°	188.3	130.0	180.7	283.4	375.3	444.0	418.1	427.9	352.8	173.7	109.3	73.5	42.6
75,0°	79.5	49.5	103.3	171.0	226.3	273.0	234.3	258.1	188.4	90.8	79.5	53.3	28.4
77,5°	32.8	26.1	45.5	68.8	109.2	112.3	72.0	72.0	64.4	51.6	54.2	38.7	20.2
80,0°	12.7	11.2	13.8	29.0	49.2	38.8	18.1	12.1	17.2	27.4	33.2	21.4	13.7
82,5°	3.2	2.9	2.9	5.3	16.4	9.5	4.8	5.8	4.2	4.2	8.1	8.7	8.6
85,0°	1.0	0.7	1.0	1.2	1.0	1.3	1.2	1.3	1.3	1.2	1.1	1.3	1.4
87,5°	0.2	0.3	0.3	0.2	0.3	0.2	0.2	0.1	0.1	0.2	0.3	0.1	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2
2,5°	275.4	276.4	275.8	278.7	278.6	279.2	271.9	270.2	267.9	266.6	265.7	265.4	263.3
5,0°	286.6	286.7	285.9	286.3	284.1	287.4	264.7	262.8	256.2	253.3	253.1	251.8	249.4
7,5°	296.6	297.2	303.1	302.6	302.8	305.2	270.5	262.1	259.5	254.0	251.0	248.1	242.3
10,0°	301.8	296.6	299.1	304.9	306.9	303.6	259.4	258.2	251.7	245.1	233.7	230.0	225.1
12,5°	309.7	314.4	316.9	312.5	316.6	319.6	255.9	247.6	242.0	238.3	229.5	217.0	207.4
15,0°	330.0	333.2	335.6	336.4	331.8	332.1	257.5	245.9	237.1	225.7	216.8	209.9	200.7
17,5°	340.4	350.7	346.9	351.7	356.5	362.7	255.8	243.9	231.9	218.7	211.5	199.8	188.0
20,0°	362.8	363.2	373.1	382.4	380.6	382.4	252.3	241.2	228.1	215.1	199.2	189.6	172.4
22,5°	387.9	383.3	388.4	391.7	392.5	390.0	253.3	235.4	220.1	206.9	190.3	176.2	163.6
25,0°	395.3	398.5	402.1	400.7	402.0	389.6	250.3	227.6	210.8	196.3	187.2	166.5	152.4
27,5°	401.7	407.5	403.6	409.3	400.9	403.3	260.7	230.3	210.7	188.2	169.1	157.2	146.2
30,0°	413.5	413.1	416.0	405.9	412.5	413.1	252.2	228.6	208.9	181.1	168.2	150.9	126.5
32,5°	416.5	415.7	415.4	407.1	400.4	396.3	250.2	222.7	203.8	181.8	161.7	133.9	105.2
35,0°	424.4	420.6	411.8	403.2	413.5	397.8	239.8	214.2	199.1	170.3	146.6	110.2	83.9
37,5°	425.9	417.6	417.5	409.3	406.8	412.1	226.9	213.4	196.8	169.6	121.4	85.3	67.5
40,0°	424.1	425.5	404.9	403.6	392.5	398.2	225.0	212.7	194.7	148.3	99.2	71.0	64.3
42,5°	423.2	393.4	395.9	380.3	376.0	384.5	217.5	213.5	183.3	128.6	79.8	58.6	62.0
45,0°	389.6	380.7	368.6	371.4	374.3	375.4	224.9	214.4	166.7	108.0	62.0	58.1	54.8
47,5°	370.2	345.8	351.5	356.1	365.4	361.7	224.3	217.2	151.3	82.7	53.5	53.3	57.7
50,0°	334.9	342.1	336.0	335.7	348.4	343.1	242.2	210.6	134.8	60.0	49.0	50.8	51.6
52,5°	346.2	341.0	336.8	343.7	328.2	308.0	259.4	202.0	112.3	49.3	46.8	46.3	48.4
55,0°	348.5	336.1	321.4	333.3	327.1	301.8	255.3	183.3	89.9	43.5	43.5	43.4	45.5
57,5°	333.1	301.4	287.0	280.8	243.0	217.5	256.1	169.8	70.2	40.4	42.6	39.9	41.4
60,0°	279.1	240.3	177.8	140.7	115.6	108.0	237.5	150.4	54.0	37.7	41.5	39.6	41.3
62,5°	178.1	124.1	98.0	100.8	85.8	88.1	239.1	140.0	43.7	36.8	36.2	37.1	37.9
65,0°	99.1	83.2	78.4	82.9	69.1	68.0	241.7	135.3	46.2	32.9	35.4	35.4	34.2
67,5°	67.6	65.4	58.0	59.1	52.8	55.0	240.2	129.6	40.5	27.7	30.8	32.7	30.2
70,0°	54.9	49.1	44.3	41.8	38.6	38.8	219.4	108.6	29.5	25.1	24.9	26.1	25.9
72,5°	37.5	35.8	30.6	29.5	27.8	29.1	182.7	84.2	24.7	21.6	21.1	20.7	20.3
75,0°	27.1	24.4	19.7	18.6	15.6	14.7	95.9	46.9	22.2	15.0	16.2	15.3	14.5
77,5°	16.0	13.2	12.0	10.3	11.8	9.8	39.9	12.4	10.7	9.4	9.8	10.7	10.3
80,0°	9.9	6.2	5.3	5.1	4.8	4.8	13.7	6.5	4.8	4.8	4.6	5.9	6.2
82,5°	3.9	2.2	1.7	1.8	1.9	1.6	2.3	2.3	2.4	2.4	2.2	2.5	3.4
85,0°	0.8	0.3	0.5	0.4	0.5	0.7	1.0	0.7	0.8	0.7	0.7	0.8	0.6
87,5°	0.1	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.2	0.1	0.1	0.1	0.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 21 midi LED</b>	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	275.2	0.4	0.4
2,5°	260.8	259.8	256.9	253.8	251.0	252.2	251.9	249.9	250.5	250.2	252.4	3.2	3.6
5,0°	248.3	248.0	247.6	244.7	243.8	240.8	239.7	238.1	240.3	238.3	240.2	6.3	10.0
7,5°	237.6	230.9	229.2	228.6	224.8	222.0	219.4	218.6	215.7	216.7	216.9	9.4	19.3
10,0°	221.3	214.6	208.2	202.9	198.7	198.8	199.0	198.0	198.2	198.1	195.2	12.2	31.5
12,5°	203.7	196.8	192.2	183.7	183.6	182.0	181.0	176.7	174.1	172.2	171.5	15.0	46.5
15,0°	186.5	178.0	176.2	169.6	166.7	160.1	155.8	154.1	151.7	150.9	150.6	17.7	64.2
17,5°	176.1	167.1	157.8	153.5	148.4	147.6	144.8	144.9	145.1	146.7	143.8	20.7	84.8
20,0°	164.3	155.9	149.9	146.2	140.9	137.2	131.6	130.4	128.3	126.9	124.9	23.6	108.5
22,5°	154.2	146.7	140.2	130.7	122.7	116.4	112.1	109.0	111.6	108.2	110.7	26.4	134.9
25,0°	142.1	130.1	120.6	106.7	103.3	95.5	98.8	96.4	97.5	97.4	99.3	29.1	164.0
27,5°	123.7	109.6	92.1	90.5	86.8	87.4	88.0	94.3	96.2	99.4	99.8	31.7	195.7
30,0°	104.3	88.4	83.4	81.7	84.9	91.2	91.8	95.1	93.2	95.8	99.4	34.4	230.1
32,5°	81.6	73.6	73.0	73.4	77.3	81.3	81.6	84.1	86.0	82.6	88.3	36.5	266.6
35,0°	69.6	66.2	65.4	69.0	64.3	66.1	67.8	70.2	73.5	73.0	80.2	38.6	305.2
37,5°	70.3	69.8	68.3	63.8	63.8	59.8	62.3	66.0	64.0	64.6	67.3	41.0	346.2
40,0°	65.5	66.3	67.3	63.3	62.7	67.0	69.6	69.2	66.5	65.0	68.9	43.2	389.4
42,5°	64.0	62.1	68.3	59.5	72.1	75.8	71.4	68.4	64.4	63.6	62.6	45.0	434.4
45,0°	58.5	58.8	65.2	59.8	62.5	64.7	64.0	60.4	60.0	57.6	57.0	46.3	480.6
47,5°	53.8	57.1	57.5	58.4	56.9	59.5	56.5	57.2	57.7	57.2	54.4	47.2	527.9
50,0°	52.4	52.7	52.9	54.9	55.1	55.6	57.4	56.4	52.2	52.9	53.2	48.3	576.2
52,5°	50.2	51.8	51.5	52.5	53.4	50.3	52.2	48.7	52.1	48.7	47.6	49.5	625.7
55,0°	47.0	47.2	50.2	49.9	48.0	48.9	47.8	47.7	44.7	45.8	45.7	50.6	676.3
57,5°	46.6	43.4	43.3	44.0	46.3	44.9	46.0	42.7	41.6	42.0	41.1	50.5	726.8
60,0°	39.7	40.8	39.5	40.4	40.2	41.0	40.9	42.6	41.2	41.2	39.3	48.0	774.8
62,5°	36.9	38.6	35.2	36.9	36.9	36.9	37.6	37.2	37.3	37.5	36.1	45.8	820.6
65,0°	33.7	36.6	36.0	30.8	34.2	31.7	33.6	34.0	34.8	34.2	33.8	43.9	864.4
67,5°	30.7	30.9	31.1	30.5	30.9	30.4	30.0	32.6	33.0	32.5	32.0	40.1	904.6
70,0°	24.9	27.9	27.6	27.1	28.7	24.9	27.3	28.1	30.3	29.7	29.0	35.7	940.2
72,5°	20.6	22.8	23.9	24.1	24.1	24.0	23.7	24.0	28.1	31.5	34.3	29.2	969.4
75,0°	16.2	18.4	21.1	21.3	20.4	20.7	19.2	19.2	26.6	34.8	38.2	17.7	987.1
77,5°	10.5	11.5	15.4	16.1	16.5	15.0	14.2	12.3	12.7	7.0	5.2	8.0	995.1
80,0°	7.0	7.3	9.5	11.3	13.1	11.1	7.6	9.0	5.4	1.0	1.0	3.5	998.6
82,5°	3.1	4.6	5.5	6.4	6.3	4.6	4.5	3.8	1.9	0.6	0.3	1.2	999.7
85,0°	0.9	0.9	0.9	1.0	0.9	0.8	0.7	0.7	0.2	0.1	0.0	0.2	1000.0
87,5°	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
--	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	21550	136.6	143.6	140.1
95	241	252	20447	128.0	134.4	131.2
90	229	250	19429	120.3	126.2	123.2
85	216	248	18326	112.0	117.6	114.8
80	203	246	17223	104.0	109.1	106.6
75	190	243	16120	96.3	101.0	98.6
70	178	241	15102	89.3	93.7	91.5
65	165	238	13999	82.0	86.0	84.0
60	152	235	12896	74.8	78.5	76.6
55	140	232	11878	68.3	71.6	69.9
50	127	229	10775	61.4	64.3	62.8
45	114	225	9672	54.6	57.3	56.0
40	102	221	8654	48.5	50.8	49.6
35	89	216	7551	42.0	44.0	43.0
30	76	210	6448	35.7	37.3	36.5
25	63	203	5345	29.6	30.8	30.2
20	51	195	4327	23.9	25.0	24.4
15	38	184	3224	18.1	18.9	18.5
10	25	169	2121	12.3	12.8	12.6

<b>Dimming levels table</b>	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	21550	133.6	138.1	135.8
95	241	252	20447	125.4	129.6	127.5
90	229	250	19428	118.0	122.0	120.0
85	216	248	18326	110.2	113.9	112.0
80	203	246	17223	102.6	106.0	104.3
75	191	244	16205	95.7	98.9	97.3
70	178	241	15102	88.5	91.3	89.9
65	165	238	13999	81.3	83.9	82.6
60	152	235	12896	74.3	76.7	75.5
55	140	232	11878	67.9	70.1	69.0
50	127	229	10775	61.2	63.1	62.2
45	114	225	9672	54.5	56.2	55.4
40	102	221	8654	48.5	50.1	49.3
35	89	216	7551	42.1	43.4	42.8
30	76	210	6448	35.7	36.9	36.3
25	64	204	5430	30.0	31.0	30.5
20	51	195	4327	24.0	24.8	24.4
15	38	184	3224	18.2	18.7	18.4
10	26	171	2206	12.8	13.2	13.0

## Photometric test report

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
--	--	--------------------------------------

<b>Dimming levels table</b>	environmental temperature: 15°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	21560	134.8	140.4	137.6
95	241	252	20456	126.4	131.6	129.0
90	229	250	19437	118.8	123.7	121.2
85	216	248	18334	110.9	115.4	113.2
80	203	246	17231	103.1	107.3	105.2
75	191	244	16212	96.2	100.1	98.2
70	178	241	15109	88.8	92.3	90.6
65	165	238	14005	81.5	84.8	83.2
60	152	235	12902	74.5	77.4	76.0
55	140	232	11883	68.0	70.7	69.4
50	127	229	10780	61.2	63.6	62.4
45	114	225	9676	54.5	56.7	55.6
40	102	221	8658	48.5	50.4	49.4
35	89	216	7554	41.9	43.6	42.8
30	76	210	6451	35.7	37.0	36.4
25	64	204	5432	30.0	31.1	30.6
20	51	195	4329	24.0	24.9	24.4
15	38	184	3225	18.1	18.7	18.4
10	26	171	2207	12.8	13.2	13.0

**Photometric test report**

<b>Family</b> Streetlight 21 midi LED	<b>Order number: 5XE3E31Y08NB</b> <b>EAN: 4058352924143</b>	<b>LP number</b> <b>59079_238</b>
--	--	--------------------------------------

**Luminousfluxs table** **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	21550.0	136.6
5.0	21550.0	133.6
15.0	21560.0	134.8