


Photometric test report

Family DL 11 iQ 	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
	Version post-top- or mounting to wall arm, shielding on building side Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 2700 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1550 lm Power consumption = 11.8 W Luminous efficacy = 131.4 lm/W	serial documentation 11.09.2023

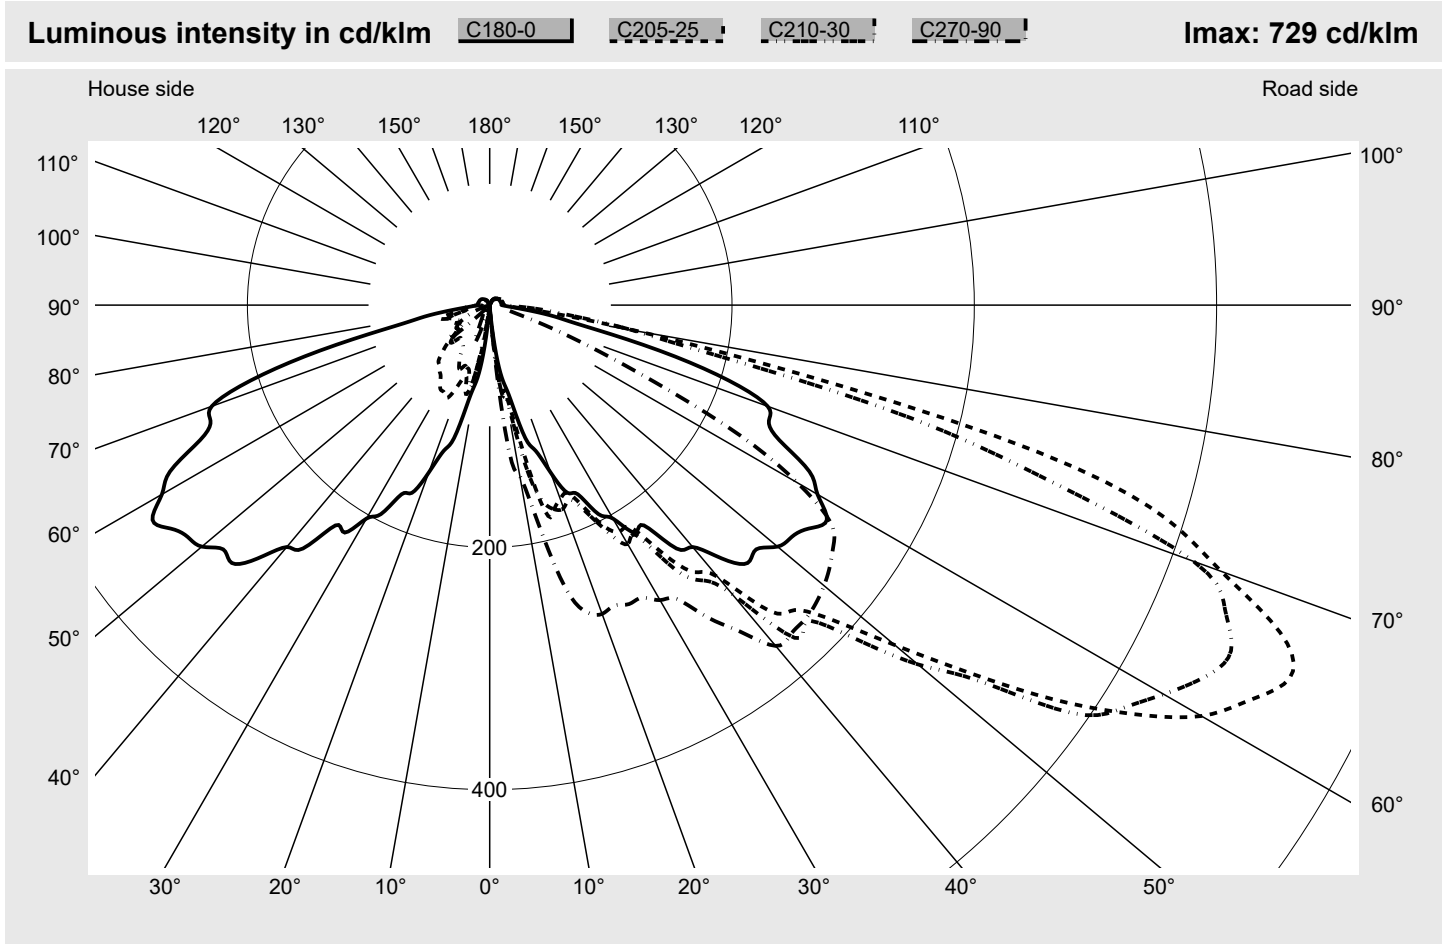


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	95.9%
Eta 90° - 180°	4.1%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	642.6
Imax 80°	150.2
Imax 90°	11.9
Imax >90°	11.6
Imax >95°	11.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
---------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

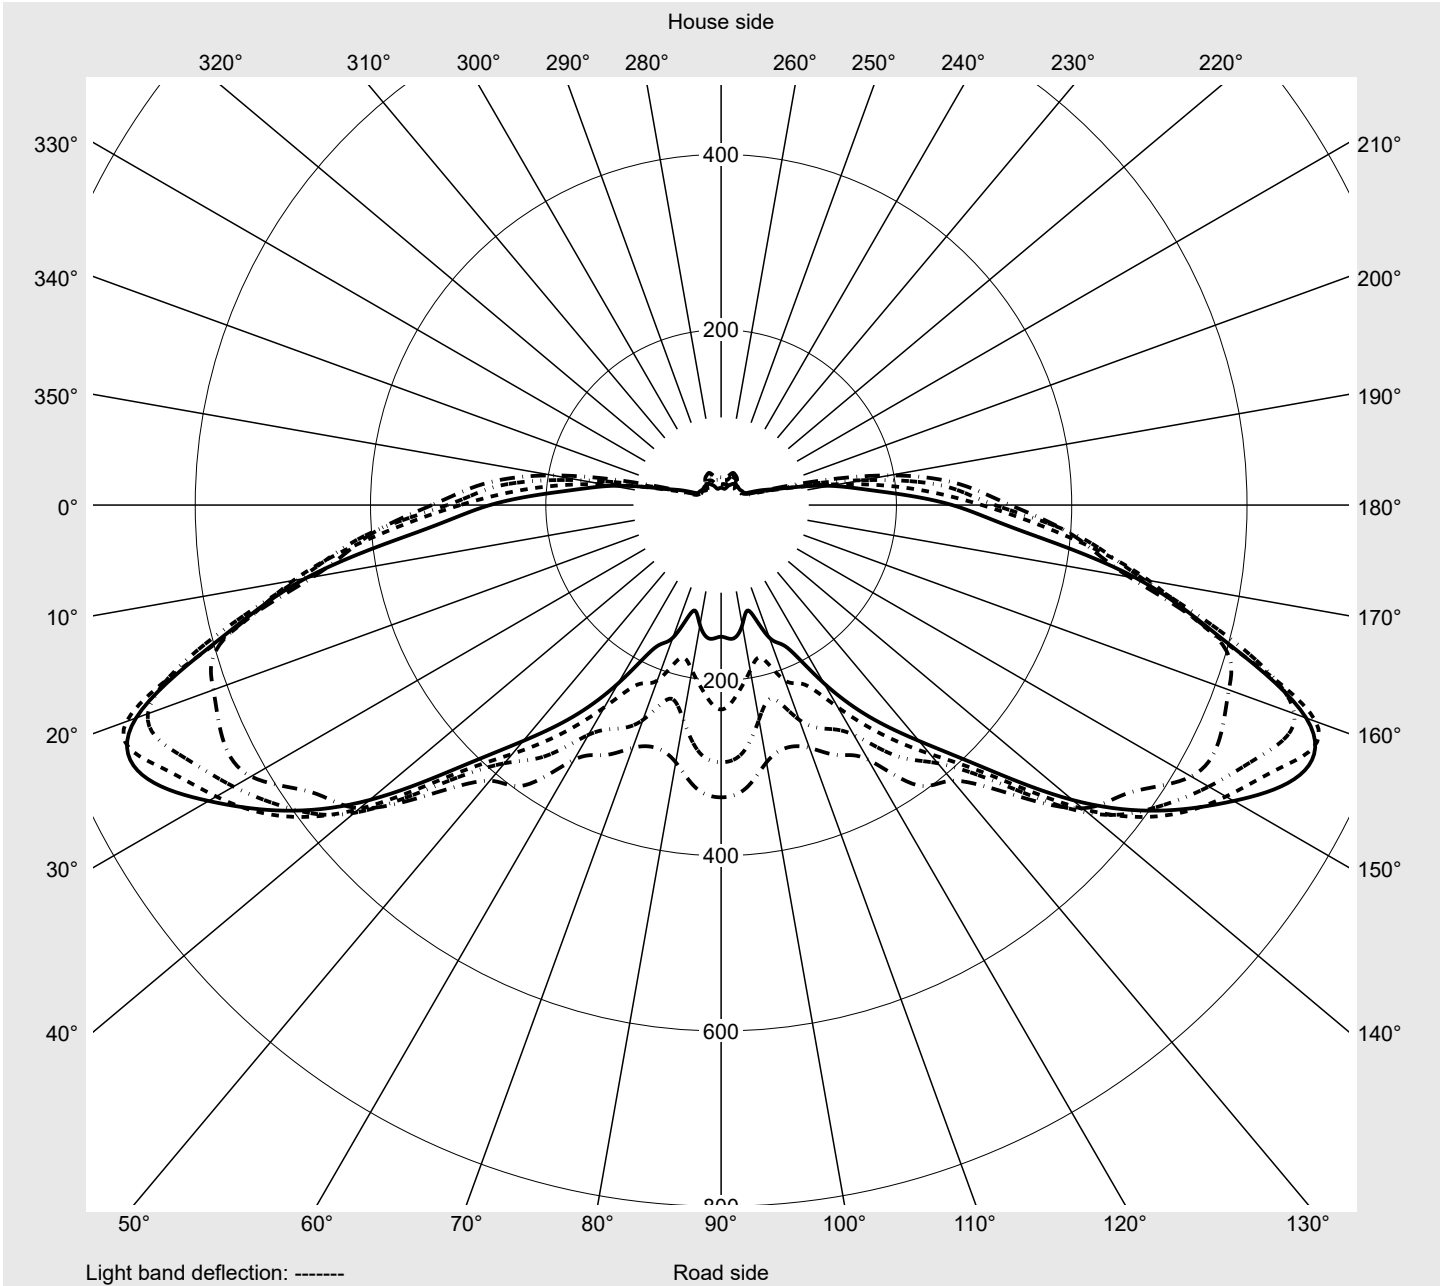

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
---------------------------	--	------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	4.0	4.0	4.1	4.1	4.5	4.5	4.6	4.8	5.0	5.1	5.3	5.5	5.6
5,0°	8.6	9.9	11.2	13.1	14.9	17.0	19.5	21.8	24.1	25.8	26.6	27.0	27.8
7,5°	40.9	50.4	56.9	63.5	69.1	71.0	70.3	69.6	69.0	69.6	72.1	77.9	83.7
10,0°	63.8	63.2	65.2	69.3	74.1	74.4	74.6	79.4	89.6	99.9	112.0	123.2	130.7
12,5°	80.4	82.9	86.7	91.3	106.4	113.5	133.3	149.2	158.0	155.5	152.5	155.1	159.9
15,0°	113.6	119.1	133.3	145.2	161.9	175.8	167.2	172.3	177.3	176.5	175.0	178.0	184.4
17,5°	126.0	142.1	174.5	165.9	173.7	177.0	176.6	186.6	187.6	195.2	196.2	197.3	199.8
20,0°	147.0	152.0	165.7	165.4	171.4	170.4	178.3	177.5	178.1	187.1	192.2	197.0	204.8
22,5°	167.7	170.9	177.8	175.0	173.5	167.9	173.7	180.6	186.6	192.2	199.0	208.1	219.0
25,0°	172.3	171.9	185.2	193.4	190.7	184.4	188.6	195.8	200.3	206.9	214.5	222.3	237.2
27,5°	194.5	195.3	197.8	199.0	201.8	206.6	211.2	218.3	213.7	226.9	238.5	246.3	257.4
30,0°	203.4	209.6	215.0	208.9	214.2	215.5	227.8	243.0	248.4	250.7	264.0	275.7	285.5
32,5°	222.6	219.8	215.5	215.4	210.6	218.2	225.3	238.5	261.8	274.6	288.5	290.9	306.0
35,0°	222.0	231.6	239.2	240.2	231.4	251.4	265.5	281.2	297.4	314.6	320.4	323.4	331.0
37,5°	253.2	256.7	257.4	257.4	260.2	277.9	286.3	306.3	322.4	333.1	352.5	349.8	355.3
40,0°	260.7	261.3	269.4	268.8	270.3	292.8	311.3	335.9	343.0	364.5	370.7	377.4	389.2
42,5°	283.7	283.7	292.8	296.1	317.7	342.7	372.5	386.5	394.3	411.5	410.2	403.1	400.4
45,0°	301.0	298.4	310.3	307.8	319.2	355.9	369.5	402.4	419.3	435.3	442.1	421.6	419.6
47,5°	298.4	295.9	318.6	331.0	348.3	385.4	405.7	438.6	442.3	440.6	446.9	433.3	428.1
50,0°	310.1	326.3	356.8	383.4	382.6	436.5	461.3	473.2	457.0	447.6	443.9	427.4	417.6
52,5°	314.3	357.4	382.1	464.1	456.2	498.2	509.8	507.8	482.6	465.1	443.4	428.2	399.1
55,0°	321.5	386.0	413.2	520.7	542.2	567.0	587.2	541.4	521.5	470.9	433.8	415.3	360.1
57,5°	330.0	404.2	473.0	586.0	616.4	627.9	619.3	571.0	538.2	465.6	410.5	390.2	335.4
60,0°	312.4	409.5	489.9	608.0	696.0	678.3	642.4	602.6	546.3	448.4	384.6	349.7	302.7
62,5°	297.6	393.0	495.5	589.2	722.0	706.6	665.1	617.6	539.7	436.7	370.7	318.9	266.5
65,0°	263.8	345.9	481.5	593.0	710.4	728.6	675.2	607.8	523.5	423.4	351.3	294.9	234.9
67,5°	249.4	304.0	438.0	553.9	690.7	706.3	657.0	591.5	495.9	393.7	327.8	266.0	198.6
70,0°	244.1	320.5	436.3	547.3	631.2	642.6	618.3	523.8	437.2	354.9	294.2	233.9	170.0
72,5°	206.7	321.2	378.3	518.4	592.5	585.0	488.6	442.1	353.0	281.0	224.9	180.3	142.7
75,0°	144.9	254.2	323.7	447.9	476.0	468.2	359.4	314.6	224.8	185.2	174.8	160.4	131.0
77,5°	80.9	145.2	212.5	286.0	316.1	262.0	192.0	169.4	143.1	125.0	125.9	124.9	113.0
80,0°	54.6	73.6	106.5	132.7	150.2	124.5	120.1	129.3	99.2	70.3	53.4	46.3	53.1
82,5°	31.4	39.5	44.3	57.2	65.2	54.3	70.6	90.5	73.3	44.7	25.8	21.2	15.5
85,0°	17.7	19.2	17.5	17.4	16.4	21.7	43.5	52.9	39.0	23.5	16.5	14.4	12.7
87,5°	12.4	12.4	12.6	13.1	13.9	16.2	20.8	21.5	16.4	12.7	12.7	12.1	11.7
90,0°	9.9	10.4	10.8	11.1	11.4	11.6	11.6	11.6	11.6	11.4	11.6	11.4	11.4
92,5°	9.8	10.3	10.8	11.1	11.2	11.4	11.4	11.6	11.4	11.4	11.4	11.4	11.2
95,0°	9.8	10.1	10.4	10.8	11.1	11.4	11.4	11.4	11.4	11.4	11.4	11.2	11.2
97,5°	9.8	10.1	10.4	10.8	11.1	11.1	11.4	11.4	11.4	11.2	11.2	11.2	11.2
100,0°	9.8	9.9	10.3	10.6	10.9	11.1	11.1	11.1	11.2	11.2	11.2	11.1	11.2
102,5°	9.4	9.8	10.1	10.4	10.8	11.1	11.1	11.1	11.1	11.1	11.2	11.1	11.2
105,0°	9.4	9.8	9.9	10.3	10.8	10.8	11.1	11.1	11.1	11.1	10.9	10.9	10.9
107,5°	9.3	9.4	9.8	10.1	10.4	10.8	10.8	10.8	10.8	10.8	10.9	10.9	10.9
110,0°	9.3	9.4	9.6	9.8	10.3	10.4	10.6	10.8	10.8	10.8	10.6	10.6	10.6
112,5°	9.1	9.4	9.4	9.8	10.1	10.3	10.4	10.4	10.4	10.4	10.6	10.4	10.6

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1
2,5°	5.6	5.8	6.0	6.3	6.3	6.3	4.0	4.0	4.0	3.8	3.8	4.0	4.0
5,0°	27.6	26.8	25.8	24.6	23.2	23.2	7.8	7.3	6.3	5.6	5.5	5.1	5.0
7,5°	93.8	102.9	110.2	112.8	120.4	120.4	38.0	27.1	21.3	14.1	10.9	7.3	6.0
10,0°	138.6	142.4	143.9	144.9	143.1	143.2	66.0	65.8	64.0	55.1	39.2	26.0	17.4
12,5°	169.0	176.5	184.8	188.7	185.7	183.6	75.1	71.9	69.8	66.2	64.7	65.3	58.1
15,0°	198.1	213.7	226.3	232.9	237.0	241.8	106.5	89.0	85.2	77.1	75.9	66.2	56.4
17,5°	209.9	223.1	240.0	254.4	263.5	265.6	111.0	93.5	82.9	70.1	63.7	56.6	50.0
20,0°	214.4	231.1	245.3	260.7	270.4	271.3	133.5	116.6	100.1	84.7	64.2	54.9	41.8
22,5°	221.5	229.1	245.3	259.5	262.3	268.6	154.8	139.6	117.3	101.9	76.6	54.3	35.6
25,0°	245.6	249.8	259.5	267.5	271.8	272.2	159.1	147.9	122.9	101.6	84.7	58.4	40.2
27,5°	265.0	271.9	276.2	276.2	274.4	272.2	174.7	158.8	134.8	101.6	81.4	54.6	33.7
30,0°	292.8	287.5	282.2	282.7	280.4	281.2	193.7	170.2	141.3	109.7	80.7	49.0	30.9
32,5°	307.8	305.3	294.2	292.6	287.5	287.8	205.8	184.3	148.0	110.0	76.1	41.4	28.6
35,0°	331.8	320.4	310.3	311.1	312.1	315.3	211.9	183.9	146.9	111.0	70.6	39.4	27.6
37,5°	357.9	359.1	344.4	337.3	336.9	339.7	242.3	207.2	165.1	121.4	68.1	38.0	29.3
40,0°	390.8	381.1	351.8	347.0	354.8	367.2	253.6	214.4	161.6	117.6	64.5	37.0	31.3
42,5°	406.2	388.0	355.3	359.6	366.7	368.2	262.5	216.8	163.4	110.3	62.5	36.9	33.9
45,0°	415.0	391.2	354.8	360.2	366.7	367.5	291.4	239.0	173.7	106.2	55.4	43.7	41.5
47,5°	419.8	379.1	355.6	361.1	366.9	364.9	286.5	223.1	151.7	90.1	48.1	43.0	37.4
50,0°	412.0	365.5	345.5	355.6	362.9	360.2	287.3	224.4	148.0	79.7	38.4	35.9	31.1
52,5°	387.5	351.1	336.3	344.2	353.3	354.0	287.8	222.1	131.0	65.8	34.1	31.3	27.8
55,0°	352.3	329.5	321.9	328.0	344.7	346.3	287.5	216.2	115.8	56.9	32.6	27.8	25.5
57,5°	314.8	294.7	286.8	298.1	324.3	333.4	273.2	195.0	95.6	42.8	30.3	27.3	26.3
60,0°	281.5	260.8	228.7	248.6	283.5	293.4	253.7	163.2	81.0	37.0	28.6	26.3	26.6
62,5°	226.1	213.0	180.9	191.5	215.8	233.2	217.2	137.0	71.1	43.7	31.9	27.3	27.0
65,0°	180.1	161.1	125.4	138.9	153.0	150.2	180.6	126.4	74.4	49.8	33.1	29.3	28.4
67,5°	145.9	111.5	76.7	86.5	92.3	89.3	174.8	115.6	71.6	46.0	33.7	30.6	31.1
70,0°	121.7	84.9	44.0	40.7	44.0	48.6	168.0	115.1	72.3	42.2	34.1	32.1	32.7
72,5°	98.4	53.8	27.8	21.5	20.8	22.8	150.3	105.9	66.5	41.4	37.9	35.2	26.5
75,0°	78.6	27.0	19.5	16.2	15.7	15.5	104.4	78.7	60.4	41.4	42.0	29.6	16.5
77,5°	46.3	18.9	15.4	14.1	13.9	14.2	61.4	54.1	50.9	38.0	32.9	20.5	14.7
80,0°	17.9	14.6	13.6	13.2	13.4	13.6	47.5	45.8	40.4	30.6	23.2	21.0	16.0
82,5°	13.7	12.9	12.7	12.7	12.9	12.9	30.4	29.8	28.1	21.2	19.5	16.5	13.4
85,0°	12.2	12.1	12.1	12.2	12.2	12.2	17.4	18.5	19.7	21.2	19.2	16.4	11.9
87,5°	11.7	11.7	11.7	11.9	11.9	12.2	12.6	13.6	14.9	15.1	14.1	12.7	11.1
90,0°	11.6	11.6	11.6	11.7	11.6	11.9	9.4	9.3	8.8	8.3	7.8	7.3	6.6
92,5°	11.4	11.4	11.6	11.6	11.6	11.6	9.4	9.1	8.6	8.1	7.8	7.1	6.5
95,0°	11.2	11.4	11.6	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
97,5°	11.2	11.2	11.6	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
100,0°	11.2	11.2	11.2	11.6	11.6	11.6	9.4	9.1	8.4	8.1	7.4	7.1	6.5
102,5°	11.2	11.2	11.2	11.4	11.6	11.6	9.1	8.8	8.4	8.1	7.4	7.1	6.5
105,0°	10.9	11.2	11.2	11.2	11.2	11.6	9.1	8.8	8.4	8.1	7.4	6.8	6.5
107,5°	10.9	10.9	11.2	11.2	11.2	11.2	9.1	8.8	8.4	7.8	7.4	6.8	6.5
110,0°	10.8	10.9	10.9	10.9	11.1	11.2	8.9	8.8	8.4	7.8	7.4	6.8	6.3
112,5°	10.6	10.6	10.8	10.9	10.9	10.9	8.8	8.8	8.4	7.8	7.4	6.8	6.3

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	0.0	0.0
2,5°	4.1	4.5	4.6	5.0	5.3	5.3	4.6	4.6	4.3	4.1	4.3	0.1	0.1
5,0°	4.8	4.6	4.3	4.0	3.6	3.6	3.6	3.5	3.5	3.5	3.3	0.3	0.4
7,5°	5.0	4.6	4.6	4.6	4.5	4.5	4.1	4.0	3.8	3.8	3.6	1.6	2.0
10,0°	11.9	8.6	6.9	5.5	4.6	4.5	4.6	4.6	4.3	4.0	4.0	3.0	5.0
12,5°	42.2	26.0	15.9	7.9	4.6	4.3	4.6	4.8	4.6	4.5	4.3	5.3	10.3
15,0°	53.9	53.8	50.6	38.7	25.3	15.9	7.3	4.8	4.1	4.0	4.0	8.1	18.5
17,5°	43.2	38.0	35.6	35.2	34.2	32.4	29.3	20.8	11.6	7.6	6.6	10.2	28.6
20,0°	33.4	29.4	28.4	26.8	25.6	24.3	23.8	23.8	24.1	27.5	27.5	11.8	40.4
22,5°	27.5	24.3	23.0	20.7	19.8	19.2	20.5	20.2	22.8	30.8	32.1	13.6	54.0
25,0°	29.9	23.3	19.7	18.4	17.0	17.2	22.2	18.5	18.4	22.5	22.5	15.9	69.9
27,5°	27.5	22.3	19.0	17.2	15.4	15.5	18.5	14.9	14.1	16.5	16.5	18.4	88.3
30,0°	26.8	22.8	19.2	17.4	15.7	14.7	15.7	13.1	11.6	13.1	12.9	21.2	109.5
32,5°	25.3	22.3	19.2	17.2	15.1	13.6	13.6	11.6	10.1	10.9	10.9	23.6	133.2
35,0°	25.5	22.3	18.9	17.4	14.9	13.4	12.2	10.6	9.1	9.4	9.6	27.3	160.4
37,5°	24.8	21.7	18.7	16.9	14.6	12.7	11.2	9.6	8.3	8.4	8.6	31.5	191.9
40,0°	27.8	23.0	19.4	16.2	15.1	12.9	10.8	8.8	7.8	7.4	7.6	35.0	227.0
42,5°	31.6	26.3	20.5	18.0	15.9	15.1	11.2	8.9	6.8	6.3	6.0	39.6	266.6
45,0°	32.3	25.1	22.3	22.3	21.7	20.7	19.7	15.1	9.8	6.0	3.3	43.2	309.8
47,5°	31.9	25.6	26.5	30.3	31.8	30.3	28.4	25.5	24.6	15.2	15.2	46.2	356.0
50,0°	27.3	25.5	28.4	33.7	37.5	37.9	37.7	36.4	34.9	36.4	44.0	49.9	405.9
52,5°	25.1	24.1	27.0	33.2	39.2	41.0	42.0	42.8	46.1	40.2	34.7	53.4	459.3
55,0°	24.0	23.0	26.5	33.9	42.7	45.8	43.2	38.5	34.7	34.4	33.4	56.5	515.8
57,5°	25.1	24.8	26.5	31.3	35.9	38.0	39.0	34.9	32.4	32.1	31.8	58.3	574.1
60,0°	25.5	23.8	24.1	28.6	33.7	34.4	35.1	30.3	29.1	28.8	28.8	58.3	632.4
62,5°	26.0	24.5	26.0	28.1	31.3	31.1	29.3	25.3	24.1	24.1	23.5	56.7	689.1
65,0°	27.6	28.0	28.4	28.3	28.0	25.6	23.2	19.8	18.9	19.5	19.5	54.2	743.3
67,5°	30.6	29.9	25.3	18.9	19.8	17.2	15.9	14.6	14.6	14.9	14.6	50.2	793.5
70,0°	31.6	16.2	12.6	14.2	13.6	12.7	11.6	9.9	9.1	8.4	8.3	46.2	839.7
72,5°	14.1	10.3	10.1	10.4	9.3	8.9	8.6	7.9	6.3	4.8	4.6	40.0	879.7
75,0°	12.7	9.9	8.3	7.4	6.8	6.3	6.0	5.3	4.0	3.3	3.0	31.4	911.1
77,5°	11.2	9.4	7.1	6.1	5.5	5.0	4.1	3.5	3.0	2.6	2.6	20.4	931.5
80,0°	11.2	8.6	6.6	5.6	4.8	4.1	3.5	3.1	2.8	2.5	2.3	11.8	943.3
82,5°	11.1	8.1	6.0	5.1	4.5	4.0	3.3	3.0	2.6	2.3	2.3	6.9	950.2
85,0°	8.9	7.1	5.8	5.0	4.3	3.6	3.1	2.8	2.5	2.3	2.3	4.2	954.4
87,5°	8.6	6.5	5.5	4.6	4.0	3.6	3.1	2.8	2.5	2.3	2.3	3.0	957.4
90,0°	6.1	5.6	5.0	4.5	4.0	3.5	3.0	2.8	2.3	2.3	2.3	2.3	959.7
92,5°	6.0	5.5	5.0	4.3	4.0	3.5	3.0	2.8	2.3	2.3	2.3	2.3	962.0
95,0°	6.0	5.3	5.0	4.3	4.0	3.5	3.0	2.6	2.3	2.3	2.3	2.3	964.3
97,5°	6.0	5.3	4.8	4.3	4.0	3.3	3.0	2.8	2.3	2.3	2.3	2.3	966.6
100,0°	6.0	5.5	4.8	4.3	4.0	3.6	3.0	2.8	2.5	2.3	2.3	2.2	968.8
102,5°	6.0	5.5	4.8	4.3	4.0	3.6	3.0	2.8	2.6	2.5	2.3	2.2	971.1
105,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.3	2.6	2.2	973.2
107,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.5	2.3	2.1	975.3
110,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	2.8	2.6	2.6	2.6	2.1	977.4
112,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.1	3.0	2.6	2.6	2.6	2.0	979.4

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	9.1	9.1	9.4	9.4	9.8	10.1	10.1	10.1	10.3	10.3	10.3	10.3	10.3
117,5°	8.9	9.1	9.1	9.4	9.4	9.8	9.8	9.8	9.9	10.1	9.9	9.9	9.9
120,0°	8.8	8.9	9.1	9.1	9.4	9.4	9.6	9.6	9.6	9.6	9.8	9.6	9.8
122,5°	8.6	8.8	8.8	8.9	9.1	9.1	9.1	9.3	9.3	9.3	9.3	9.3	9.4
125,0°	8.4	8.4	8.6	8.6	8.8	8.8	8.8	8.9	8.9	8.9	8.9	8.9	8.9
127,5°	8.1	8.3	8.4	8.3	8.4	8.4	8.4	8.6	8.6	8.6	8.6	8.6	8.6
130,0°	7.8	7.9	7.9	7.9	8.1	8.1	8.1	8.3	8.3	8.3	8.3	8.3	8.3
132,5°	7.3	7.4	7.6	7.6	7.6	7.8	7.6	7.8	7.9	7.9	7.9	7.9	7.9
135,0°	6.9	6.9	7.1	7.3	7.3	7.3	7.3	7.4	7.4	7.6	7.6	7.6	7.6
137,5°	6.5	6.6	6.8	6.8	6.9	6.9	6.9	7.1	7.3	7.1	7.3	7.3	7.3
140,0°	6.1	6.1	6.3	6.3	6.5	6.6	6.6	6.6	6.6	6.8	6.9	6.9	6.9
142,5°	5.8	5.8	6.0	6.0	6.1	6.3	6.3	6.3	6.3	6.5	6.6	6.6	6.6
145,0°	5.3	5.5	5.6	5.6	5.8	5.8	6.0	6.0	6.0	6.1	6.3	6.3	6.3
147,5°	5.0	5.0	5.3	5.3	5.3	5.5	5.5	5.6	5.6	5.6	5.8	6.0	6.0
150,0°	4.3	4.5	4.6	4.6	4.8	5.0	5.0	5.0	5.1	5.3	5.3	5.3	5.3
152,5°	3.6	4.0	4.0	4.0	4.0	4.3	4.3	4.3	4.3	4.3	4.6	4.6	4.6
155,0°	3.0	3.0	3.1	3.1	3.3	3.3	3.3	3.5	3.5	3.6	3.6	3.6	3.6
157,5°	2.2	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.5	2.5	2.5	2.6	2.6
160,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.8	1.7	1.7
162,5°	1.5	1.7	1.7	1.3	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.7	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.2	1.3	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.3	10.3	10.6	10.6	10.6	10.6	8.8	8.6	8.4	7.8	7.4	6.8	6.3
117,5°	10.1	10.3	10.3	10.3	10.3	10.3	8.8	8.4	8.1	7.8	7.4	6.8	6.3
120,0°	9.9	9.9	9.9	9.9	9.9	9.9	8.8	8.4	8.1	7.8	7.3	6.8	6.1
122,5°	9.4	9.6	9.4	9.4	9.4	9.6	8.4	8.3	8.1	7.6	7.1	6.8	6.1
125,0°	9.1	9.1	9.1	8.9	8.9	8.9	8.3	8.1	7.8	7.4	7.1	6.5	6.1
127,5°	8.8	8.6	8.6	8.6	8.6	8.6	7.9	7.8	7.4	7.1	6.8	6.5	6.1
130,0°	8.3	8.3	8.3	8.3	8.3	8.3	7.6	7.4	7.1	6.9	6.6	6.3	5.8
132,5°	7.9	7.9	7.9	7.9	7.9	8.3	7.3	6.9	6.8	6.6	6.3	6.0	5.5
135,0°	7.6	7.6	7.6	7.6	7.6	7.9	6.8	6.6	6.5	6.1	6.0	5.6	5.3
137,5°	7.3	7.3	7.3	7.3	7.3	7.6	6.5	6.3	6.0	5.8	5.6	5.3	5.1
140,0°	6.9	6.9	6.9	6.9	6.9	7.3	6.0	5.8	5.6	5.5	5.3	5.1	4.8
142,5°	6.6	6.6	6.6	6.6	6.6	6.6	5.6	5.5	5.3	5.1	5.0	4.8	4.5
145,0°	6.3	6.3	6.3	6.3	6.3	6.6	5.3	5.1	5.0	4.8	4.6	4.5	4.3
147,5°	6.0	6.0	6.0	6.0	6.0	6.0	5.0	4.6	4.6	4.3	4.3	4.0	4.0
150,0°	5.3	5.3	5.3	5.3	5.5	5.6	4.3	4.3	4.0	4.0	3.6	3.6	3.3
152,5°	4.6	4.6	4.6	4.6	4.6	4.6	3.6	3.6	3.3	3.3	3.0	3.0	3.0
155,0°	3.6	3.6	3.6	3.6	3.6	3.6	2.8	2.6	2.6	2.5	2.3	2.3	2.3
157,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.0	2.0	2.0	2.0	2.0	2.0	1.7
160,0°	2.0	1.7	1.7	1.7	1.7	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.5
162,5°	1.5	1.3	1.3	1.3	1.3	1.7	1.7	1.7	1.5	1.3	1.3	1.3	1.3
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
167,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.9	981.3
117,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.9	983.2
120,0°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.8	985.0
122,5°	5.8	5.3	4.8	4.3	4.0	3.6	3.3	3.0	2.6	2.6	2.6	1.7	986.7
125,0°	5.6	5.3	4.6	4.3	4.0	3.6	3.3	3.0	2.8	2.6	2.6	1.6	988.3
127,5°	5.5	5.0	4.6	4.3	4.0	3.6	3.3	3.0	2.8	2.6	2.6	1.5	989.8
130,0°	5.3	5.0	4.5	4.1	3.8	3.6	3.1	3.0	2.8	2.8	2.6	1.4	991.2
132,5°	5.1	4.8	4.3	4.0	3.6	3.3	3.0	3.0	2.8	2.8	2.6	1.3	992.4
135,0°	5.0	4.6	4.1	4.0	3.6	3.3	3.0	2.8	2.6	2.6	2.6	1.2	993.6
137,5°	4.6	4.3	4.0	3.6	3.5	3.3	3.0	2.8	2.6	2.6	2.6	1.1	994.7
140,0°	4.5	4.1	3.8	3.5	3.3	3.0	3.0	2.6	2.6	2.3	2.3	1.0	995.6
142,5°	4.3	4.1	3.8	3.5	3.3	3.0	2.8	2.6	2.5	2.3	2.3	0.9	996.5
145,0°	4.0	4.0	3.6	3.5	3.3	3.0	2.6	2.6	2.3	2.3	2.3	0.8	997.3
147,5°	3.8	3.6	3.5	3.3	3.0	3.0	2.6	2.3	2.3	2.0	2.0	0.7	997.9
150,0°	3.3	3.3	3.0	3.0	2.6	2.6	2.3	2.2	2.0	2.0	2.0	0.6	998.5
152,5°	2.8	2.6	2.5	2.3	2.3	2.0	2.0	2.0	1.8	1.7	1.7	0.4	999.0
155,0°	2.2	2.0	2.0	2.0	2.0	1.7	1.7	1.7	1.7	1.7	1.7	0.3	999.3
157,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.5	1.7	1.3	1.3	0.2	999.5
160,0°	1.5	1.7	1.5	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.6
162,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.8
165,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
167,5°	1.3	1.3	1.7	1.7	1.5	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
170,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575MF14H000022 + 5XA54000XBL EAN: 4058352956946 + 4050737971421	LP number 59425_16
---------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1550	11.8	12.1	12.0
95	241	252	1471	11.1	11.4	11.2
90	229	250	1397	10.6	10.8	10.7
85	216	248	1318	9.9	10.2	10.0
80	203	246	1239	9.3	9.6	9.4
75	190	243	1159	8.7	9.0	8.8
70	178	241	1086	8.2	8.4	8.3
65	165	238	1007	7.6	7.7	7.6
60	152	235	928	7.0	7.2	7.1
55	140	232	854	6.5	6.6	6.6
50	127	229	775	6.0	6.1	6.0
45	114	225	696	5.4	5.6	5.5
40	102	221	622	5.0	5.1	5.0
35	89	216	543	4.5	4.6	4.6
30	76	210	464	4.0	4.0	4.0
26	65	204	397	3.6	3.7	3.6