




Photometric test report

Family Highbay 31	Order number: 51HC42DA4MMB EAN: 4058352700297	LP number 59125_6
	Version	primary light control with lens, PC, clear, wide distribution
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 28000 lm Power consumption = 187.0 W Luminous efficacy = 149.7 lm/W
		serial documentation 16.01.2023
		

Luminous intensity in cd/klm C180-0 **Imax: 539 cd/klm**

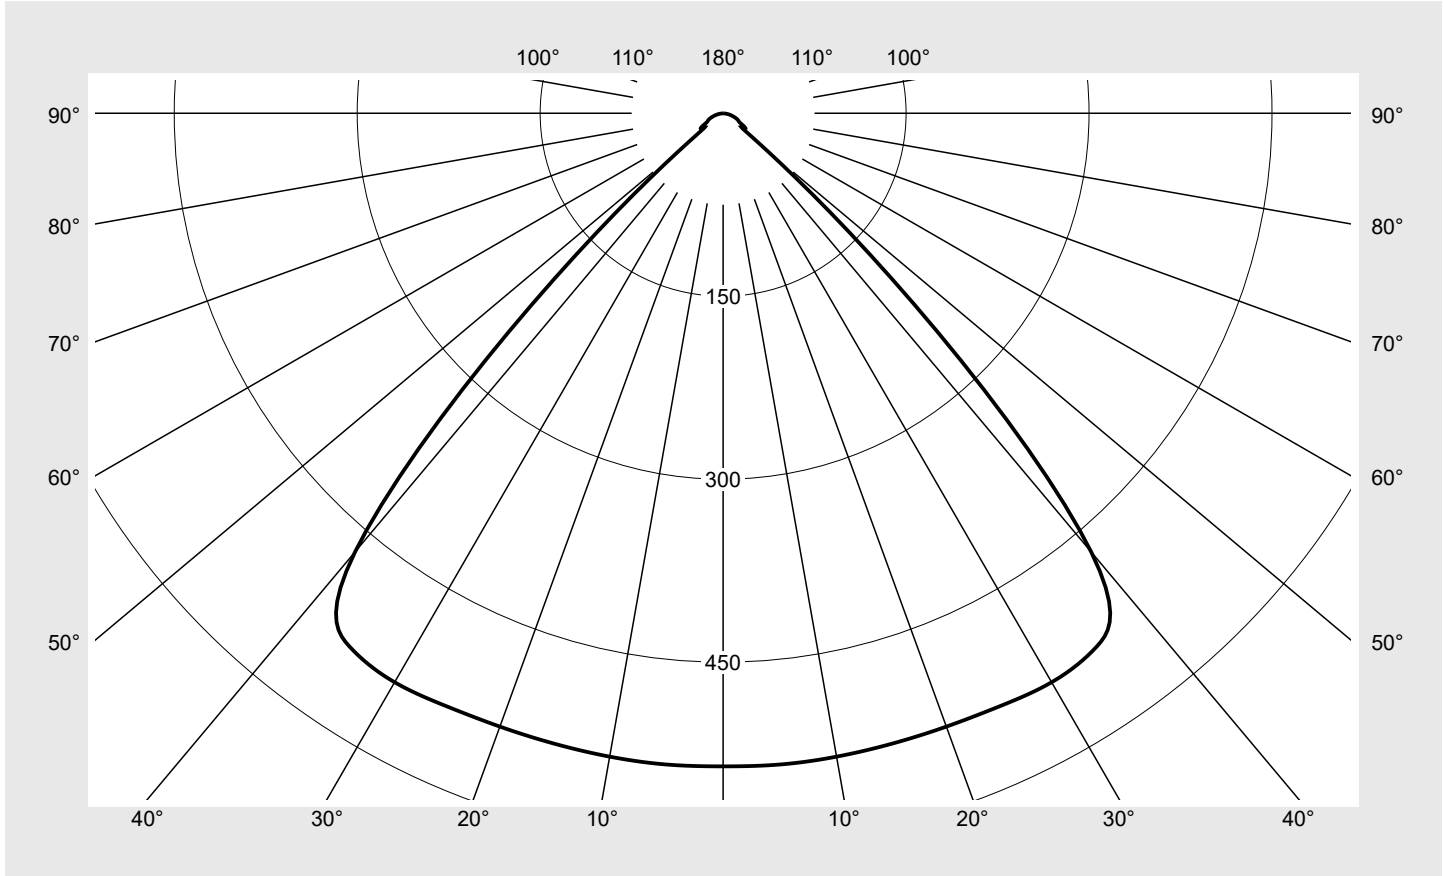

Classifications	
DIN 5040	A 6 0
CIE	N1=83 N2=98 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 31	Order number: 51HC42DA4MMB EAN: 4058352700297	LP number 59125_6
----------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	535.4	3.2	3.2
5°	535.9	25.6	28.8
10°	535.6	51.0	79.8
15°	535.1	75.9	155.7
20°	535.1	100.3	256.0
25°	536.5	124.3	380.3
30°	538.6	147.6	527.9
35°	533.9	167.9	695.8
40°	469.4	165.4	861.2
45°	221.6	85.9	947.0
50°	39.7	16.7	963.7
55°	21.6	9.7	973.4
60°	16.7	7.9	981.3
65°	13.5	6.7	988.0
70°	10.5	5.4	993.4
75°	7.1	3.8	997.2
80°	3.9	2.1	999.3
85°	1.3	0.7	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Highbay 31	Order number: 51HC42DA4MMB EAN: 4058352700297	LP number 59125_6
----------------------	--	----------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.5	25.8	24.9	26.2	26.5	24.5	25.8	24.9	26.2	26.5
	3H	24.4	25.6	24.8	26.0	26.3	24.4	25.6	24.8	26.0	26.3
	4H	24.4	25.5	24.8	25.9	26.2	24.4	25.5	24.8	25.9	26.2
	6H	24.4	25.4	24.8	25.7	26.1	24.4	25.4	24.8	25.7	26.1
	8H	24.4	25.3	24.8	25.7	26.1	24.4	25.3	24.8	25.7	26.1
	12H	24.4	25.2	24.8	25.6	26.0	24.4	25.2	24.8	25.6	26.0
4H	2H	24.3	25.4	24.7	25.8	26.2	24.3	25.4	24.7	25.8	26.2
	3H	24.3	25.2	24.7	25.6	26.0	24.3	25.2	24.7	25.6	26.0
	4H	24.3	25.1	24.7	25.5	25.9	24.3	25.1	24.7	25.5	25.9
	6H	24.2	24.9	24.7	25.4	25.8	24.2	24.9	24.7	25.4	25.8
	8H	24.2	24.8	24.7	25.3	25.8	24.2	24.8	24.7	25.3	25.8
	12H	24.2	24.7	24.7	25.2	25.7	24.2	24.7	24.7	25.2	25.7
8H	4H	24.2	24.8	24.7	25.3	25.7	24.2	24.8	24.7	25.3	25.7
	6H	24.2	24.7	24.7	25.1	25.7	24.2	24.7	24.7	25.1	25.7
	8H	24.1	24.6	24.7	25.1	25.6	24.1	24.6	24.7	25.1	25.6
	12H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5
12H	4H	24.2	24.7	24.7	25.2	25.7	24.2	24.7	24.7	25.2	25.7
	6H	24.1	24.6	24.7	25.1	25.6	24.1	24.6	24.7	25.1	25.6
	8H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 376
-----------------	---------------------------------	---------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	79010.2
50°	15570.6
55°	9496.3
60°	8416.9
65°	8062.4
70°	7717.3
75°	6906.9
80°	5651.9
85°	3793.1

Photometric test report

Family
Highbay 31

Order number: 51HC42DA4MMB
EAN: 4058352700297

LP number
59125_6

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

