

Photometric test report

Family
CITY-LIGHT PLUS LED

Order number: **5XA5275AF14H**
EAN: **4058352835111**

LP number
57130_29



Version post-top- or mounting to wall arm
Optic direct, symmetric wide distribution S120011
Cover cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 1470 lm
Power consumption = 12.9 W
Luminous efficacy = 114 lm/W

serial
documentation
07.07.2022

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 814 cd/klm

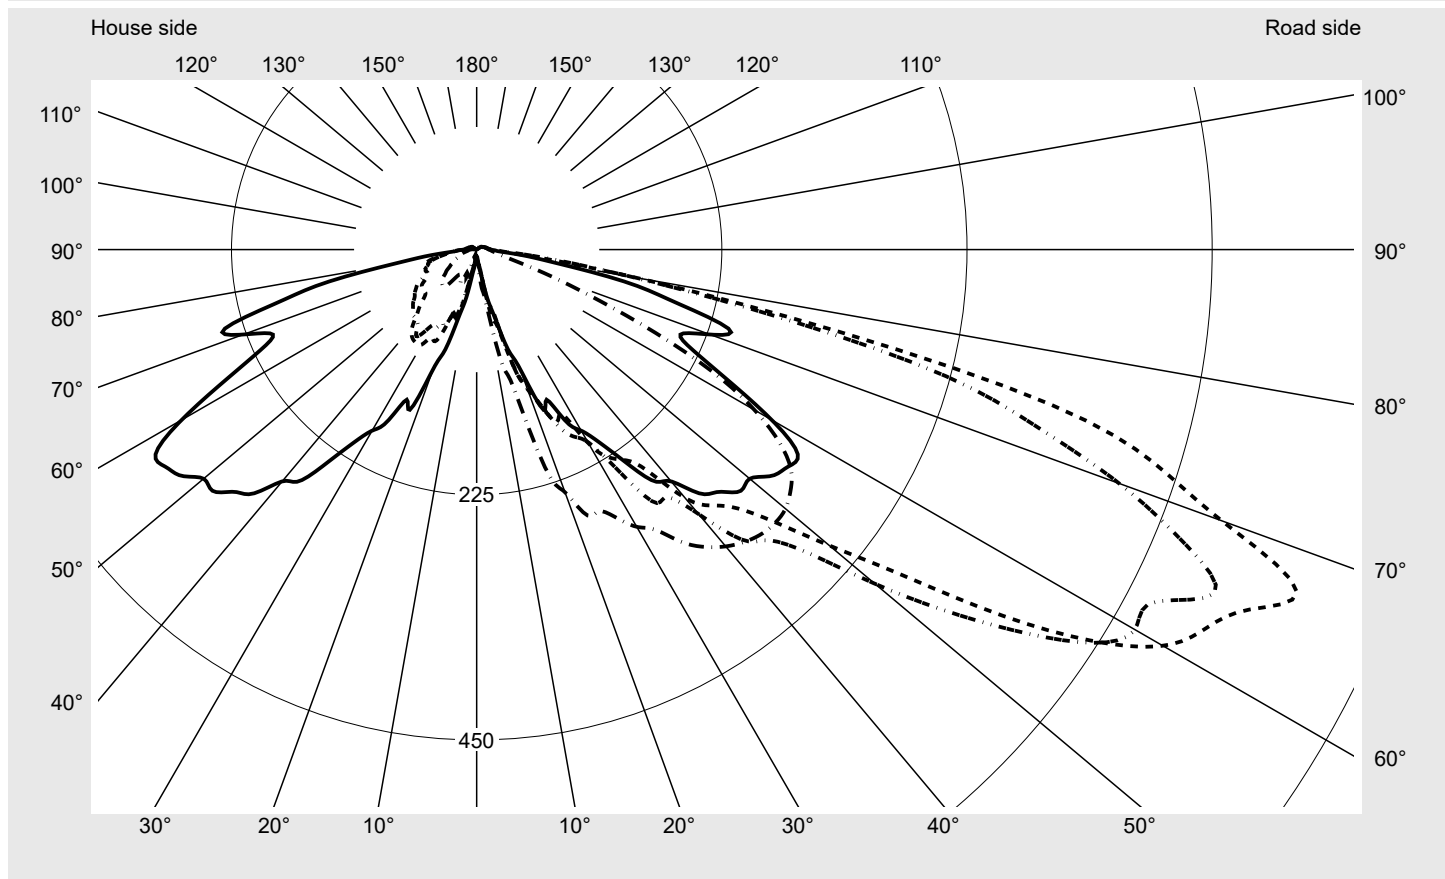

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	727.6
Imax 80°	157.2
Imax 90°	13.4
Imax >90°	12.4
Imax >95°	10.3


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
--------------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

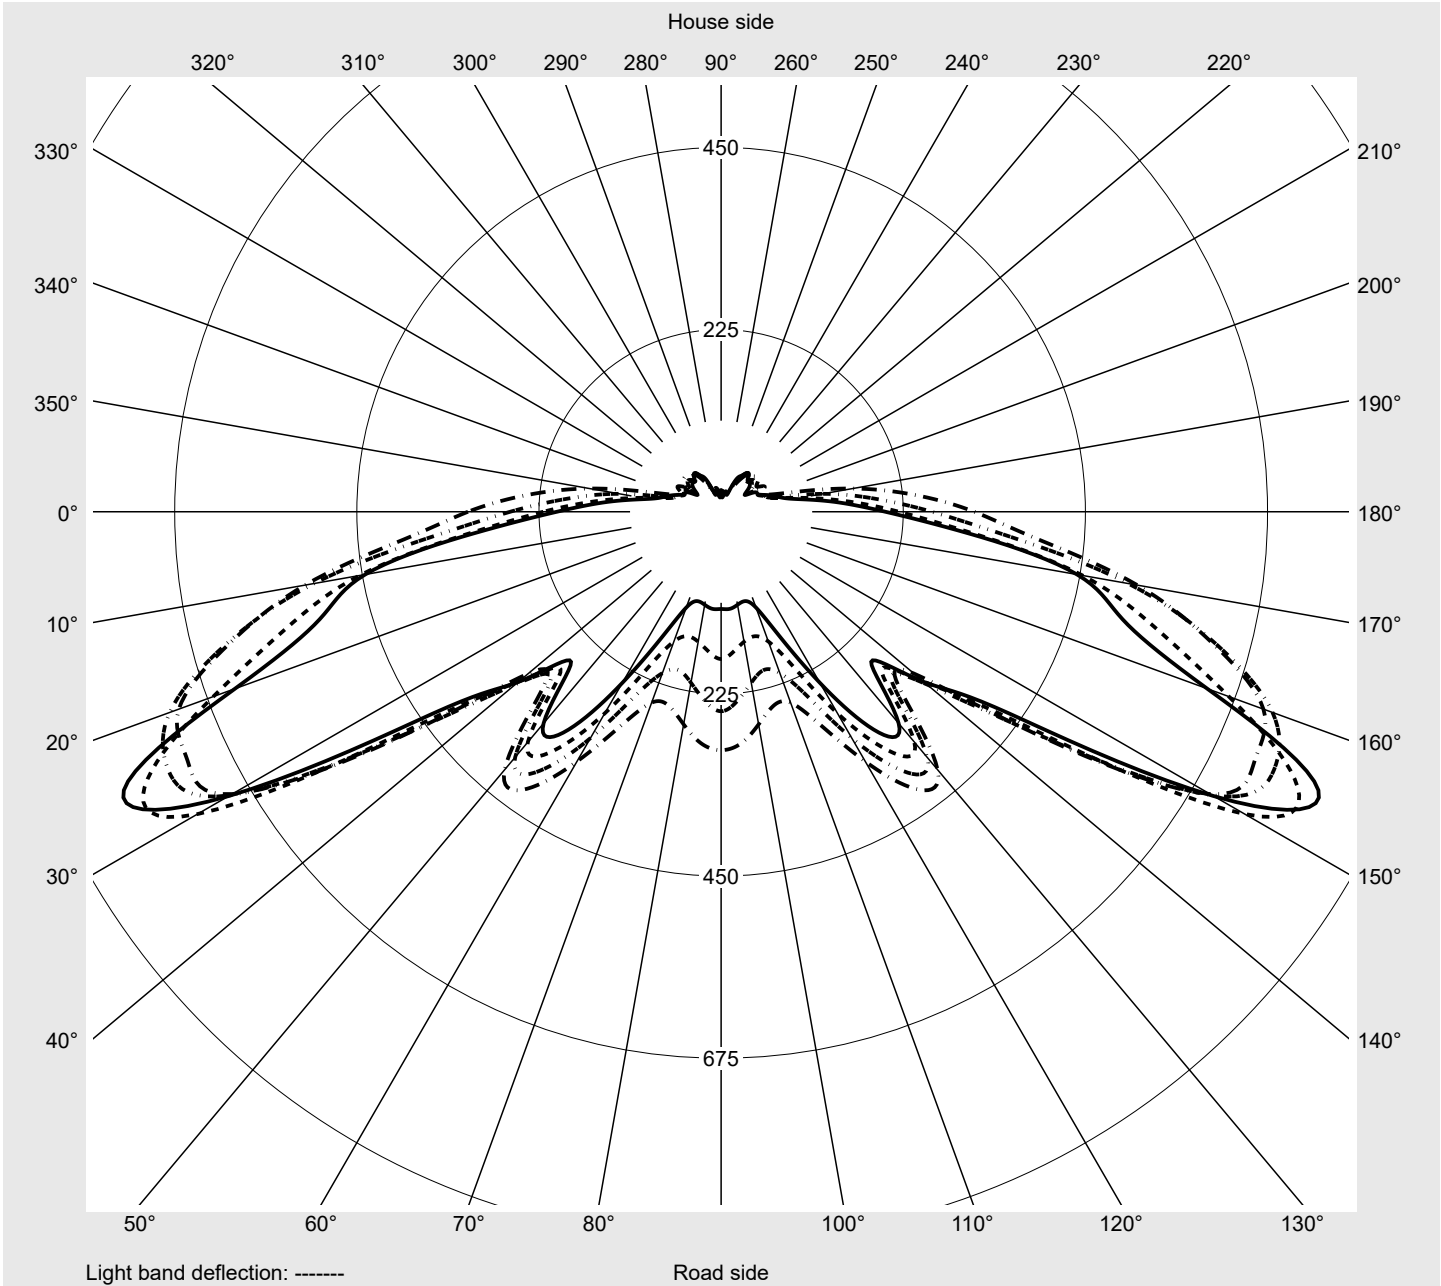

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
2,5°	6.9	6.9	6.9	6.9	7.2	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
5,0°	7.9	8.2	8.2	8.9	9.3	10.0	10.0	10.3	10.6	11.0	11.7	12.7	13.4
7,5°	16.5	19.2	20.3	19.6	17.8	15.8	14.4	14.1	15.8	18.2	21.3	25.7	29.5
10,0°	24.7	23.7	24.7	26.8	24.4	21.6	17.5	17.2	24.7	36.0	45.3	49.8	46.7
12,5°	47.4	52.5	58.0	59.7	67.3	63.2	52.5	49.1	59.4	67.6	70.0	71.0	72.4
15,0°	65.2	66.6	67.6	70.4	78.9	71.7	59.7	52.2	64.9	85.5	107.4	108.5	116.4
17,5°	96.8	107.8	123.9	109.1	107.4	110.9	112.9	105.7	93.7	105.4	136.9	149.6	150.0
20,0°	116.7	112.2	152.0	127.7	143.1	136.3	134.2	126.3	103.3	122.9	157.9	160.3	174.0
22,5°	158.6	162.3	185.7	176.1	163.7	156.5	155.1	143.1	115.7	129.1	172.6	182.9	206.6
25,0°	152.0	153.1	177.8	189.8	186.0	174.4	179.9	182.3	123.6	144.2	182.6	188.1	226.2
27,5°	178.1	167.5	188.8	190.8	181.9	170.2	193.6	207.0	127.0	163.4	205.2	200.4	242.7
30,0°	191.9	196.0	216.9	229.6	216.6	205.6	203.9	213.8	137.3	186.0	244.4	224.1	256.7
32,5°	210.1	204.2	226.9	244.4	241.6	226.2	237.5	245.8	151.4	216.9	281.8	263.6	281.8
35,0°	238.2	229.6	243.0	254.7	237.2	235.8	282.8	290.0	164.1	229.3	310.3	300.7	313.4
37,5°	268.1	268.1	281.4	290.0	273.2	254.0	286.3	289.0	173.3	260.5	327.4	339.8	352.8
40,0°	277.7	278.0	282.1	307.2	303.4	297.6	316.8	312.3	188.1	297.6	353.9	356.6	384.4
42,5°	303.8	285.2	313.4	313.0	320.2	318.5	361.4	339.5	204.2	326.1	399.5	384.8	401.9
45,0°	314.4	305.1	341.2	341.5	345.6	335.0	377.2	370.3	221.4	339.5	427.3	407.8	412.6
47,5°	328.1	318.2	397.1	396.1	400.5	369.3	411.5	390.9	240.9	358.3	445.5	428.0	418.1
50,0°	327.1	339.5	435.6	440.0	452.4	422.5	477.1	435.2	255.0	363.5	447.9	432.8	415.6
52,5°	341.2	348.4	457.5	468.8	511.1	488.8	546.1	465.8	273.6	354.6	452.4	445.2	411.2
55,0°	348.0	370.3	458.2	509.7	574.6	582.1	613.0	491.2	296.9	347.3	442.8	446.5	399.9
57,5°	349.4	394.4	486.7	579.4	663.8	667.6	671.7	485.7	311.3	340.1	439.0	446.9	384.1
60,0°	312.7	393.7	522.0	628.8	712.9	727.3	697.4	486.7	311.0	315.1	416.0	417.7	356.3
62,5°	260.5	360.0	510.7	633.6	724.9	753.7	700.5	482.9	331.9	299.3	395.7	390.6	323.0
65,0°	219.7	314.4	453.4	556.0	667.6	781.9	746.9	465.8	326.4	280.8	371.4	360.0	287.6
67,5°	202.8	306.8	446.5	513.5	639.1	814.1	702.2	434.5	327.1	262.2	341.2	328.5	244.0
70,0°	227.9	334.0	444.5	502.5	606.5	727.6	627.8	370.0	293.5	220.7	302.0	290.0	202.8
72,5°	243.0	353.5	427.0	486.7	580.4	652.1	537.5	327.8	258.1	176.1	246.1	235.8	163.0
75,0°	191.2	298.6	370.0	416.7	509.7	538.5	441.0	228.6	168.5	86.5	181.9	193.2	141.1
77,5°	145.5	211.1	248.8	284.5	321.9	316.8	277.7	150.0	80.3	70.0	153.1	175.7	125.6
80,0°	81.7	93.0	127.7	154.5	157.2	148.3	145.2	68.0	48.7	52.2	79.3	87.9	55.3
82,5°	47.7	52.9	63.2	81.3	74.8	60.4	73.8	40.5	52.2	35.7	35.0	27.5	20.3
85,0°	22.7	24.4	29.9	31.9	25.7	28.5	33.6	18.5	27.5	19.9	14.8	15.4	15.1
87,5°	17.2	16.1	17.5	18.2	16.8	18.5	19.2	15.1	15.4	14.4	11.3	13.0	13.0
90,0°	11.7	11.3	12.7	13.4	13.0	12.7	12.4	11.7	10.3	8.9	9.6	11.0	11.7
92,5°	10.6	10.6	11.7	12.4	12.0	11.7	11.7	11.0	9.3	8.6	8.6	10.3	11.0
95,0°	10.0	10.0	10.6	11.3	11.0	10.6	10.3	10.0	8.9	7.9	8.2	9.6	10.3
97,5°	9.3	9.3	10.0	10.3	10.0	9.6	9.6	8.9	8.2	7.6	7.6	8.9	9.6
100,0°	8.6	8.6	9.3	9.3	9.3	8.9	8.9	8.6	7.9	7.2	7.2	8.2	8.9
102,5°	7.9	8.2	8.6	8.6	8.6	8.2	8.2	7.9	7.2	6.9	6.9	7.9	8.2
105,0°	7.6	7.9	7.9	8.2	7.9	7.6	7.6	7.2	6.9	6.9	6.9	7.6	7.6
107,5°	7.2	7.2	7.6	7.6	7.2	7.2	7.2	6.9	6.5	6.2	6.2	6.9	7.6
110,0°	6.5	6.9	7.2	6.9	6.9	6.5	6.5	6.2	6.2	6.2	6.2	6.2	6.9
112,5°	6.2	6.2	6.5	6.5	6.2	6.2	6.2	5.8	5.8	5.8	5.8	6.2	6.9

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2
2,5°	7.9	8.2	8.2	7.9	8.2	8.2	6.9	6.9	6.9	6.9	7.2	6.9	7.6
5,0°	13.7	14.1	13.7	14.1	13.7	13.7	7.9	7.9	7.9	7.9	7.6	7.6	7.6
7,5°	30.2	33.0	35.7	38.1	37.1	35.7	13.7	12.0	10.6	9.6	8.9	8.6	8.6
10,0°	40.8	45.0	58.3	59.0	54.2	50.8	26.4	29.2	27.8	23.0	17.8	13.4	11.0
12,5°	77.6	83.7	100.6	104.3	105.4	107.1	38.8	34.7	25.4	23.7	24.4	27.1	27.5
15,0°	127.7	106.7	99.5	125.3	133.5	131.8	64.2	60.8	55.9	66.9	57.0	49.4	47.4
17,5°	148.3	157.5	167.2	190.5	196.3	211.4	87.9	86.8	96.1	71.0	64.9	65.2	59.0
20,0°	190.5	194.3	199.8	209.7	232.7	236.8	117.7	113.6	100.9	85.5	60.4	62.1	58.7
22,5°	221.7	228.2	239.2	254.7	261.5	263.6	140.4	122.5	119.4	108.8	83.4	75.9	55.3
25,0°	252.3	255.7	255.7	258.1	263.3	265.0	135.2	130.8	127.3	115.7	92.7	74.1	55.9
27,5°	267.4	267.7	268.1	274.9	277.3	277.3	170.6	140.7	121.8	117.7	91.0	81.3	62.5
30,0°	296.2	294.1	288.3	288.3	291.1	293.8	176.8	157.9	136.6	123.9	100.6	80.0	58.3
32,5°	315.4	316.1	305.5	303.4	305.1	304.8	196.3	173.0	148.3	127.0	102.3	89.6	71.7
35,0°	338.4	340.8	327.8	318.5	321.9	327.4	212.5	177.1	152.0	133.5	101.3	96.8	86.8
37,5°	364.9	361.4	338.8	335.3	341.2	343.9	239.2	189.5	157.5	136.6	98.2	88.9	88.9
40,0°	381.0	366.2	350.1	348.4	352.5	355.6	249.5	201.5	165.4	133.2	91.6	85.8	90.3
42,5°	396.4	375.5	355.2	356.6	361.1	363.8	285.2	215.2	176.8	129.1	81.3	84.1	89.6
45,0°	411.5	382.7	361.1	362.8	366.6	369.3	304.8	231.0	174.4	117.7	74.1	83.4	89.6
47,5°	413.2	375.8	360.7	364.5	369.3	371.4	315.1	237.2	175.7	98.5	65.6	79.3	84.4
50,0°	399.5	365.9	355.9	361.1	367.6	370.0	309.9	239.2	168.9	84.4	61.4	76.2	77.9
52,5°	378.6	344.6	342.5	353.2	361.4	363.1	315.4	236.1	166.5	70.0	62.1	71.7	71.7
55,0°	351.8	319.5	321.6	334.3	347.3	352.2	309.9	233.4	151.4	68.6	61.1	69.3	66.2
57,5°	320.9	285.9	291.4	306.5	323.0	329.5	295.2	204.6	121.2	62.8	59.4	65.9	60.4
60,0°	290.7	250.9	248.5	266.7	286.9	294.5	239.6	165.1	94.4	61.8	53.9	62.1	53.9
62,5°	250.9	212.1	202.5	214.5	234.1	246.4	188.8	127.3	69.0	57.7	51.1	55.3	46.7
65,0°	211.1	170.6	159.3	163.0	173.7	181.9	153.1	99.2	65.2	56.6	49.8	52.5	40.8
67,5°	168.2	126.0	114.3	116.7	120.5	120.1	140.4	91.3	72.1	60.4	50.8	48.1	36.0
70,0°	138.3	97.8	76.9	73.8	76.5	76.9	155.8	99.2	79.3	62.1	49.8	45.3	31.9
72,5°	108.5	73.8	47.4	44.3	44.3	46.0	147.9	94.4	73.8	59.4	51.5	46.7	28.8
75,0°	86.5	54.2	35.4	31.2	29.9	29.5	99.5	72.8	60.8	50.5	48.4	45.3	28.5
77,5°	63.5	31.6	26.4	23.7	22.7	22.7	77.9	58.3	51.8	44.6	43.2	39.8	26.8
80,0°	32.3	20.6	19.9	19.2	18.5	18.5	55.3	47.0	44.6	39.5	35.7	33.0	24.7
82,5°	16.8	15.8	15.4	15.8	15.8	15.8	37.8	35.4	34.3	30.9	28.8	26.4	20.6
85,0°	14.1	13.7	14.1	14.1	13.7	13.7	22.0	24.0	26.8	27.1	24.0	21.6	18.9
87,5°	13.0	13.0	13.0	13.0	13.0	13.0	17.8	18.9	19.9	18.9	17.2	16.5	15.1
90,0°	11.7	11.7	11.7	11.7	11.7	11.7	12.0	12.0	11.7	11.3	11.0	10.6	10.0
92,5°	11.0	11.0	11.3	11.3	11.0	11.0	11.0	10.6	10.6	10.0	10.0	9.3	8.9
95,0°	10.3	10.3	10.6	10.3	10.3	10.3	10.0	10.0	9.3	9.3	8.6	8.2	7.9
97,5°	9.6	9.6	9.6	10.0	9.6	9.6	9.3	8.9	8.6	8.2	7.9	7.6	7.2
100,0°	8.9	9.3	9.6	9.3	8.9	8.9	8.6	8.2	7.9	7.9	7.2	6.9	6.5
102,5°	8.9	8.9	8.9	8.9	8.9	8.9	7.9	7.9	7.6	7.2	6.9	6.5	6.2
105,0°	8.2	8.2	8.2	8.2	8.2	8.2	7.2	7.2	6.9	6.5	6.2	6.2	5.8
107,5°	7.6	7.6	8.2	8.2	7.9	7.6	6.9	6.9	6.5	6.2	5.8	5.5	5.1
110,0°	7.6	7.6	7.6	7.6	7.6	6.9	6.5	6.2	6.2	5.8	5.5	5.1	4.8
112,5°	6.9	6.9	7.6	7.6	7.2	6.2	6.2	5.8	5.5	5.5	5.1	4.8	4.8

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	0.0	0.0
2,5°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.2	7.2	7.6	0.1	0.1
5,0°	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.2	7.2	7.6	0.2	0.3
7,5°	8.2	8.2	8.2	8.2	8.2	8.2	8.2	7.6	7.6	7.2	7.6	0.6	0.9
10,0°	9.6	9.3	8.9	8.9	8.9	8.9	8.2	7.9	7.6	7.2	7.6	1.2	2.1
12,5°	23.3	17.5	12.0	10.0	9.3	9.3	8.6	7.9	7.2	7.2	7.6	2.7	4.8
15,0°	34.0	34.3	29.9	26.1	17.2	11.3	10.3	8.9	7.9	7.6	7.6	4.5	9.3
17,5°	42.6	32.3	25.1	22.3	20.9	20.3	15.1	14.1	13.0	9.3	8.9	7.4	16.7
20,0°	45.6	36.0	28.8	26.4	27.8	17.5	12.4	16.5	23.3	25.7	26.8	9.9	26.5
22,5°	41.2	31.2	26.8	26.8	26.8	20.9	15.8	24.4	26.1	22.3	22.7	12.9	39.4
25,0°	39.1	29.9	25.7	23.7	25.1	21.6	18.5	26.8	30.5	32.6	33.0	15.1	54.5
27,5°	42.2	33.3	26.8	27.8	28.8	25.7	25.7	28.8	27.1	29.2	30.9	17.6	72.1
30,0°	43.6	38.8	33.3	30.9	27.8	25.7	27.8	33.0	29.9	28.8	28.8	20.9	93.1
32,5°	62.5	54.2	40.5	34.7	31.6	29.2	27.1	31.2	28.5	27.5	28.1	24.6	117.7
35,0°	83.4	70.4	57.3	50.5	43.9	36.0	27.8	35.0	31.2	27.8	28.1	28.7	146.4
37,5°	87.5	76.5	65.6	59.0	48.7	37.4	32.6	41.9	38.1	34.3	34.3	33.0	179.4
40,0°	87.2	75.9	65.6	60.1	50.8	39.5	35.0	47.4	46.3	43.2	43.9	36.8	216.2
42,5°	87.9	75.9	66.2	62.8	53.2	42.6	37.1	48.4	47.4	44.6	45.3	40.9	257.1
45,0°	88.2	76.9	67.6	63.5	53.9	43.2	37.4	47.4	46.7	42.9	44.6	44.5	301.7
47,5°	87.2	77.2	67.3	63.8	52.9	43.2	36.7	45.6	45.3	41.5	42.6	48.3	350.0
50,0°	81.3	74.1	65.2	63.2	51.1	41.9	35.7	42.6	42.6	38.1	40.5	51.6	401.6
52,5°	77.6	72.8	64.2	62.1	49.8	40.2	34.3	39.1	38.8	35.0	36.4	54.7	456.3
55,0°	72.4	70.4	62.8	59.4	47.7	36.7	31.9	36.0	35.4	30.9	33.6	57.3	513.7
57,5°	67.6	67.6	61.4	56.6	46.0	34.7	29.9	33.0	31.9	27.8	29.5	59.4	573.1
60,0°	59.7	61.4	57.3	55.3	45.0	33.3	27.5	29.5	29.2	24.4	26.8	59.1	632.1
62,5°	53.5	55.6	52.9	58.3	47.0	37.8	25.7	27.5	26.4	22.0	22.7	56.9	689.0
65,0°	47.7	52.5	49.4	58.0	50.8	40.5	25.1	25.4	24.4	19.6	22.0	53.3	742.3
67,5°	43.9	49.8	50.8	58.0	51.8	43.9	24.0	23.7	22.0	17.8	18.5	50.4	792.7
70,0°	40.5	43.6	48.7	54.6	49.8	39.1	25.7	22.0	19.9	16.1	17.8	46.8	839.5
72,5°	35.0	40.5	44.6	51.5	48.4	34.3	27.5	20.9	17.5	14.4	15.8	42.7	882.2
75,0°	32.6	37.4	37.1	41.9	35.4	24.7	22.7	18.5	15.4	12.4	13.7	34.6	916.8
77,5°	27.5	29.5	27.8	31.6	23.0	18.5	16.1	15.8	13.4	11.0	11.7	24.6	941.3
80,0°	22.7	19.6	17.5	21.6	18.2	18.2	15.4	14.1	11.0	9.3	9.6	14.0	955.4
82,5°	17.8	14.8	13.4	15.8	15.1	16.1	14.1	12.7	10.0	8.6	8.2	8.4	963.7
85,0°	14.1	11.3	9.6	12.4	12.4	13.4	11.7	11.0	8.6	7.2	7.6	5.0	968.8
87,5°	11.7	9.3	7.9	10.0	10.3	10.6	9.6	9.6	7.6	6.9	6.9	3.8	972.6
90,0°	8.2	6.2	5.5	8.2	8.6	8.2	7.9	7.9	6.5	5.5	5.5	2.8	975.4
92,5°	7.6	5.8	4.8	6.9	6.9	6.9	6.5	6.5	5.1	4.8	4.8	2.5	977.9
95,0°	6.5	5.1	4.5	5.5	5.8	5.8	5.5	5.5	4.8	4.5	4.1	2.3	980.2
97,5°	6.2	4.8	4.1	4.8	5.5	5.1	4.8	4.8	4.5	4.1	4.1	2.1	982.4
100,0°	5.8	4.8	4.1	4.8	4.8	4.8	4.8	4.8	4.1	4.1	4.1	2.0	984.3
102,5°	5.5	4.8	4.1	4.8	4.8	4.1	4.1	4.1	4.1	3.8	4.1	1.8	986.2
105,0°	5.1	4.5	4.1	4.1	4.1	4.1	4.1	4.1	4.1	3.4	3.4	1.7	987.9
107,5°	4.8	4.1	3.8	3.8	4.1	3.8	3.8	3.8	3.4	3.4	3.4	1.6	989.5
110,0°	4.8	4.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	1.5	990.9
112,5°	4.1	4.1	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.1	2.7	1.4	992.3

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
--------------------------------------	--	------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.8	6.2	6.2	6.2	5.8	5.8	5.5	5.5	5.5	5.5	5.8	6.2	6.2
117,5°	5.5	5.5	5.8	5.8	5.5	5.5	5.5	5.1	5.5	5.5	5.5	5.5	6.2
120,0°	4.8	5.1	5.5	5.5	5.1	5.1	4.8	4.8	5.1	5.1	5.5	5.5	5.5
122,5°	4.8	4.8	5.1	5.1	4.8	4.5	4.8	4.8	4.8	4.8	4.8	4.8	5.5
125,0°	4.1	3.8	4.1	3.8	3.8	3.8	3.8	3.8	3.8	4.1	4.1	4.1	4.1
127,5°	2.7	2.7	3.1	3.1	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
130,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.7	1.7	2.1	2.1
132,5°	2.1	2.1	2.1	1.7	1.7	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4
135,0°	1.4	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
140,0°	1.4	1.4	1.4	1.4	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
142,5°	1.4	1.4	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	1.4	1.4	1.0	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	1.0	1.0	1.0	1.0	1.0	1.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.9	6.9	6.9	6.9	6.5	4.1	5.8	5.5	5.1	5.1	4.8	4.8	4.5
117,5°	6.2	6.5	6.9	6.9	5.5	2.1	5.1	4.8	4.8	4.8	4.8	4.5	4.1
120,0°	6.2	6.2	6.2	6.2	4.8	2.1	4.8	4.8	4.8	4.5	4.1	4.1	4.1
122,5°	5.5	5.5	5.5	6.2	4.1	2.1	4.5	4.5	4.1	4.1	4.1	3.8	3.4
125,0°	4.1	4.8	4.8	4.8	3.1	1.4	3.8	3.8	3.4	3.4	3.4	3.1	3.1
127,5°	2.7	2.7	3.1	2.7	2.1	1.4	2.7	2.7	2.7	2.7	2.7	2.7	2.4
130,0°	2.1	2.1	2.1	2.1	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
132,5°	1.4	1.4	1.4	1.4	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	1.4	1.4	1.4	1.4	1.0	0.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
137,5°	1.4	1.4	1.4	1.0	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.7	1.4
140,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.4	1.4	1.4	1.4	1.4	1.4
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.1	4.1	3.4	3.1	3.4	2.7	2.7	3.1	2.7	2.7	2.7	1.3	993.6
117,5°	4.1	3.4	3.4	3.1	2.7	2.7	2.7	2.7	2.7	2.7	2.7	1.1	994.7
120,0°	4.1	3.4	3.4	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	1.1	995.8
122,5°	3.4	3.4	3.4	2.7	2.7	2.4	2.4	2.7	2.7	2.4	2.1	1.0	996.7
125,0°	2.7	2.7	2.7	2.4	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.8	997.5
127,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	0.5	998.0
130,0°	2.1	2.1	2.1	2.1	1.7	1.7	2.1	1.7	1.7	1.4	1.4	0.4	998.4
132,5°	2.1	1.7	2.1	2.1	1.4	1.4	1.4	1.4	1.7	1.4	1.4	0.3	998.8
135,0°	1.7	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.1
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.3
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.5
142,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.7
145,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.9
147,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.0	1.4	1.4	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275AF14H EAN: 4058352835111	LP number 57130_29
--------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	1470	12.9	13.3	13.1
95	241	252	1395	12.2	12.6	12.4
90	229	250	1325	11.5	11.9	11.7
85	216	248	1250	10.7	11.1	10.9
80	203	246	1175	10.1	10.5	10.3
75	190	243	1100	9.4	9.8	9.6
70	178	241	1030	8.9	9.1	9.0
65	165	238	955	8.2	8.4	8.3
60	152	235	880	7.6	7.8	7.7
55	140	232	810	7.0	7.2	7.1
50	127	229	735	6.4	6.6	6.5
45	114	225	660	5.8	6.0	5.9
40	102	221	590	5.3	5.4	5.4
35	89	216	515	4.8	4.9	4.8
30	76	210	440	4.3	4.3	4.3
25	63	203	365	3.7	3.8	3.8
24	60	201	347	3.5	3.7	3.6