




Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN495G3S4 EAN: 4058352935286	LP number 58524_283										
	<table border="0"> <tr> <td>Version</td> <td>prismatic cover, frosted, wide distribution</td> </tr> <tr> <td>Lamps</td> <td>LED 4000 K CRI ≥ 80</td> </tr> <tr> <td>Controlgear</td> <td>ECG-DALI</td> </tr> <tr> <td>Setting</td> <td>emergency light operation: 3 h</td> </tr> <tr> <td>Rated values</td> <td> Net luminous flux = 980 lm Power consumption = 6.8 W Luminous efficacy = 144.1 lm/W </td> </tr> </table>	Version	prismatic cover, frosted, wide distribution	Lamps	LED 4000 K CRI ≥ 80	Controlgear	ECG-DALI	Setting	emergency light operation: 3 h	Rated values	Net luminous flux = 980 lm Power consumption = 6.8 W Luminous efficacy = 144.1 lm/W	serial documentation 29.09.2023 
Version	prismatic cover, frosted, wide distribution											
Lamps	LED 4000 K CRI ≥ 80											
Controlgear	ECG-DALI											
Setting	emergency light operation: 3 h											
Rated values	Net luminous flux = 980 lm Power consumption = 6.8 W Luminous efficacy = 144.1 lm/W											

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 631 cd/klm**

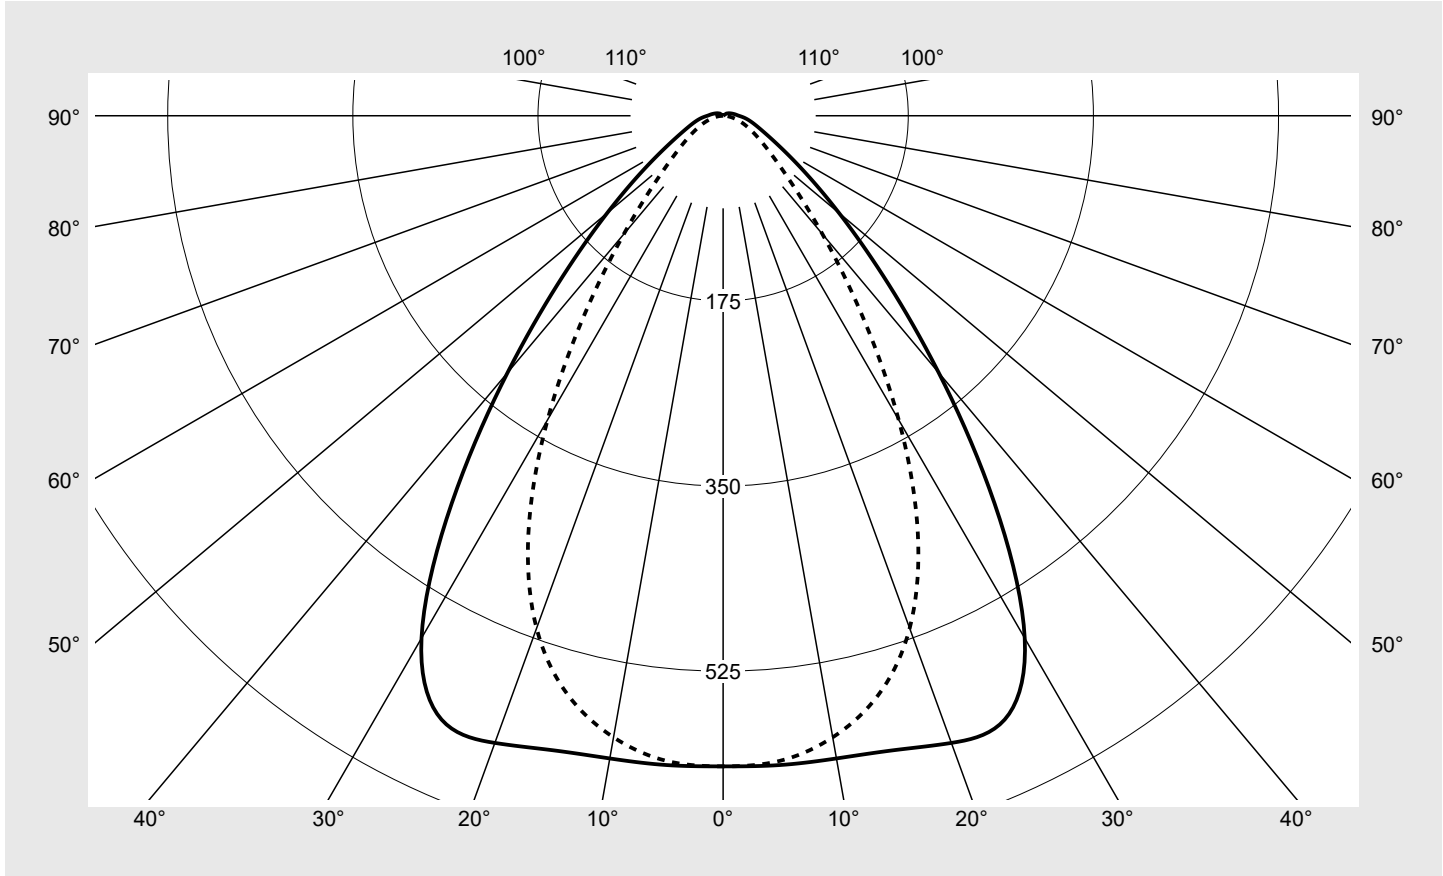

Classifications	
DIN 5040	A 5 1
CIE	N1=73 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.6%
ϕ_o	1.4%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN495G3S4 EAN: 4058352935286	LP number 58524_283
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	615.0	615.0	615.0	615.0	615.0	615.0	615.0	3.7	3.7
5°	616.1	614.1	609.7	611.1	612.9	611.9	612.2	29.3	32.9
10°	616.9	615.1	606.4	602.8	600.3	597.0	596.6	57.6	90.5
15°	620.9	617.8	600.9	587.5	576.7	568.6	566.8	83.8	174.3
20°	630.8	623.5	591.7	561.2	536.7	520.1	515.5	106.4	280.7
25°	629.8	620.7	576.3	523.2	476.9	445.6	435.5	122.6	403.3
30°	570.2	568.9	534.3	469.6	398.0	348.4	331.9	126.5	529.9
35°	447.2	456.9	450.2	394.1	307.5	246.5	227.0	114.9	644.8
40°	317.0	331.0	344.1	303.2	220.2	163.1	146.0	93.6	738.3
45°	213.9	226.3	244.1	214.7	147.7	105.6	94.0	70.6	808.9
50°	143.1	152.0	166.9	144.8	97.7	70.8	64.1	51.5	860.4
55°	96.6	102.1	111.9	95.1	64.8	49.7	46.3	37.0	897.4
60°	67.0	69.6	74.2	63.4	44.8	36.0	34.5	26.8	924.2
65°	49.0	49.5	50.0	42.8	32.0	26.6	25.7	19.7	943.9
70°	37.9	37.0	34.4	29.4	23.3	19.5	18.8	14.8	958.7
75°	30.5	28.7	24.6	20.4	16.6	13.6	12.7	11.1	969.8
80°	24.8	22.7	18.1	14.1	11.2	8.8	7.6	8.2	978.0
85°	19.7	17.8	13.4	9.8	7.1	4.8	3.4	5.9	983.8
90°	14.9	13.4	9.7	6.4	4.0	1.9	0.4	3.9	987.8
95°	12.2	11.1	8.2	5.4	3.1	1.2	0.3	3.2	991.0
100°	10.0	9.2	6.9	4.5	2.4	0.7	0.3	2.6	993.6
105°	8.2	7.6	5.7	3.6	1.7	0.4	0.3	2.1	995.6
110°	6.8	6.2	4.6	2.7	1.1	0.3	0.3	1.6	997.2
115°	5.5	5.0	3.7	2.0	0.7	0.4	0.4	1.2	998.4
120°	4.3	3.8	2.7	1.4	0.6	0.5	0.5	0.9	999.3
125°	3.1	2.7	1.8	0.9	0.6	0.6	0.6	0.6	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN495G3S4 EAN: 4058352935286	LP number 58524_283
--	---	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.2	14.6	13.6	14.9	15.3	9.9	11.4	10.3	11.7	12.0
	3H	13.6	14.9	14.0	15.2	15.6	10.3	11.6	10.7	11.9	12.3
	4H	13.9	15.0	14.3	15.4	15.7	10.4	11.6	10.8	12.0	12.4
	6H	14.1	15.2	14.6	15.6	16.0	10.6	11.7	11.0	12.0	12.4
	8H	14.4	15.3	14.8	15.7	16.1	10.7	11.7	11.1	12.0	12.5
	12H	14.5	15.4	15.0	15.8	16.2	10.7	11.6	11.1	12.0	12.4
4H	2H	13.3	14.5	13.6	14.8	15.2	10.5	11.6	10.9	12.0	12.4
	3H	13.8	14.8	14.2	15.2	15.6	10.9	11.9	11.4	12.3	12.7
	4H	14.1	15.0	14.6	15.4	15.9	11.2	12.1	11.6	12.5	12.9
	6H	14.6	15.3	15.0	15.7	16.2	11.4	12.1	11.8	12.6	13.0
	8H	14.8	15.5	15.3	15.9	16.4	11.4	12.1	11.9	12.6	13.1
	12H	15.1	15.6	15.6	16.1	16.6	11.5	12.1	12.0	12.6	13.1
8H	4H	14.1	14.9	14.6	15.3	15.8	11.4	12.1	11.9	12.5	13.0
	6H	14.7	15.2	15.1	15.7	16.2	11.7	12.2	12.2	12.7	13.2
	8H	15.0	15.5	15.5	16.0	16.5	11.8	12.3	12.3	12.8	13.3
	12H	15.4	15.8	15.9	16.3	16.8	11.9	12.3	12.4	12.8	13.4
12H	4H	14.2	14.8	14.6	15.2	15.7	11.5	12.0	12.0	12.5	13.0
	6H	14.7	15.1	15.2	15.6	16.2	11.8	12.2	12.3	12.7	13.3
	8H	15.0	15.4	15.5	15.9	16.5	11.9	12.3	12.5	12.8	13.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		2201.5	2339.7	2560.9	2305.6	1636.6	1215.6	1129.0		
50°		1576.3	1684.4	1881.2	1677.3	1173.8	889.0	846.0		
55°		1154.4	1228.2	1372.8	1204.7	857.1	692.4	685.4		
60°		883.3	924.0	1008.2	893.7	664.0	569.3	585.1		
65°		725.7	739.7	766.3	685.6	544.9	489.9	516.2		
70°		645.4	637.4	612.2	551.8	469.7	433.5	465.7		
75°		617.0	588.5	523.5	465.2	414.7	384.4	418.1		
80°		623.7	580.6	487.2	413.3	373.2	344.8	371.7		
85°		659.4	609.3	494.2	405.3	356.5	315.2	335.7		

Photometric test report

Family Licross® 11 Protected	Order number: 51TP12DN495G3S4 EAN: 4058352935286	LP number 58524_283
---	---	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

