

## Photometric test report

Family  
**Floodlight 20 midi LED**

Order number: **5XA7682D3D4AC**  
EAN: **4058352222997**

LP number  
**58577\_10**



<b>Version</b>	mast flange adapter
<b>Optic</b>	asymmetric distribution PL52
<b>Cover</b>	toughened safety glass
<b>Lamps</b>	1 x LED 5000K / CRI ≥ 70 (unbekannt LED 5000K / CRI = 70)
<b>Controlgear</b>	ECG-DALI
<b>Rated values</b>	Net luminous flux = 18250 lm Power consumption = 142.0 W Luminous efficacy = 128.5 lm/W

serial  
documentation  
**25.08.2021**

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C220-40

C270-90

Imax: **827 cd/klm**

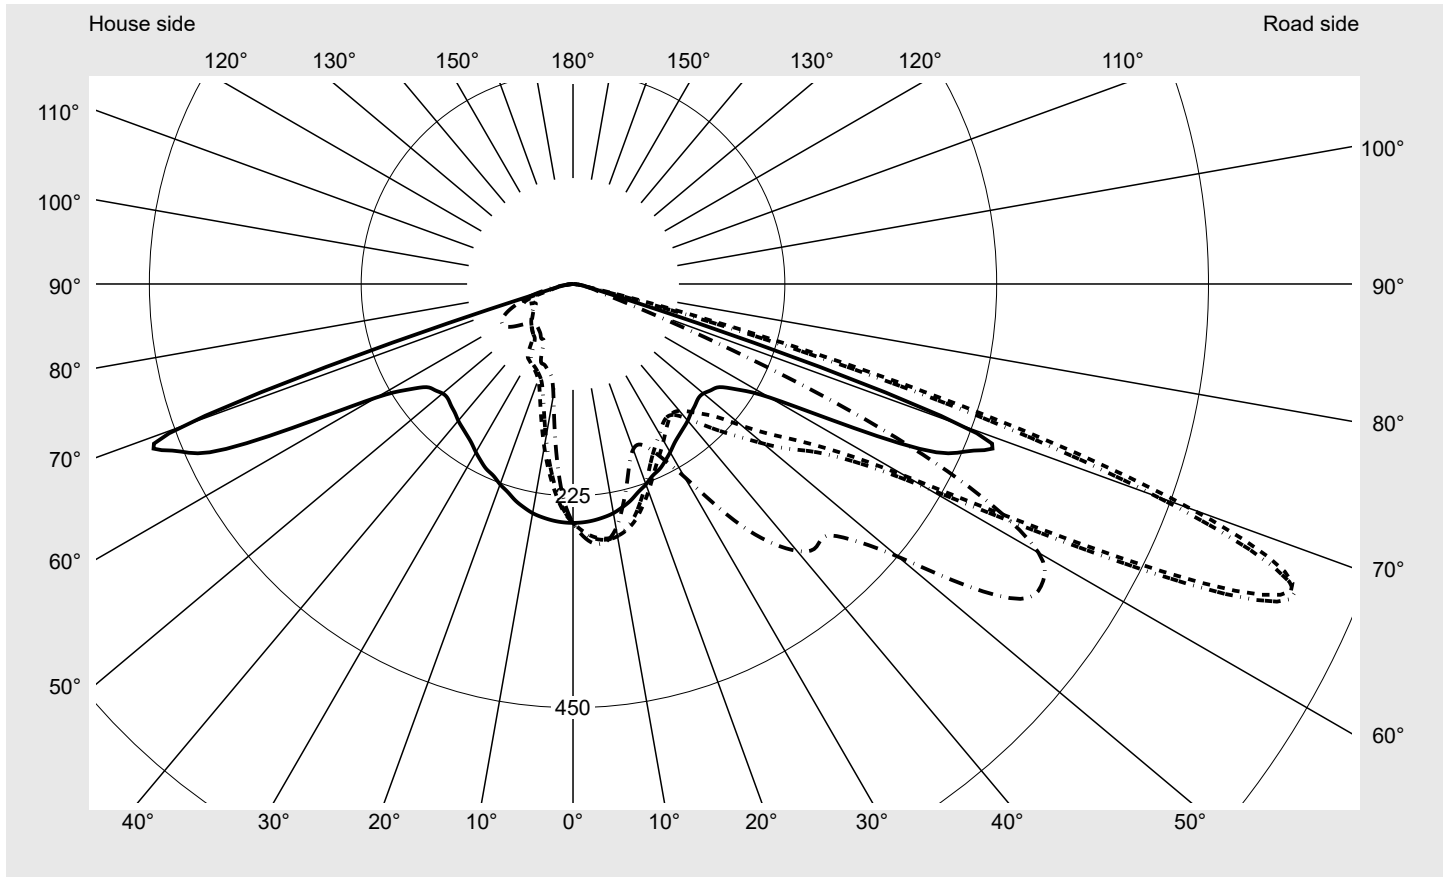

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	767.0
Imax 80°	23.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682D3D4AC</b> <b>EAN: 4058352222997</b>	<b>LP number</b> <b>58577_10</b>
--	---	-------------------------------------

**Envelope curve in cd/klm**      **KMK 67.5°**    **KMK 65°**    **KMK 62.5°**    **KMK 60°**

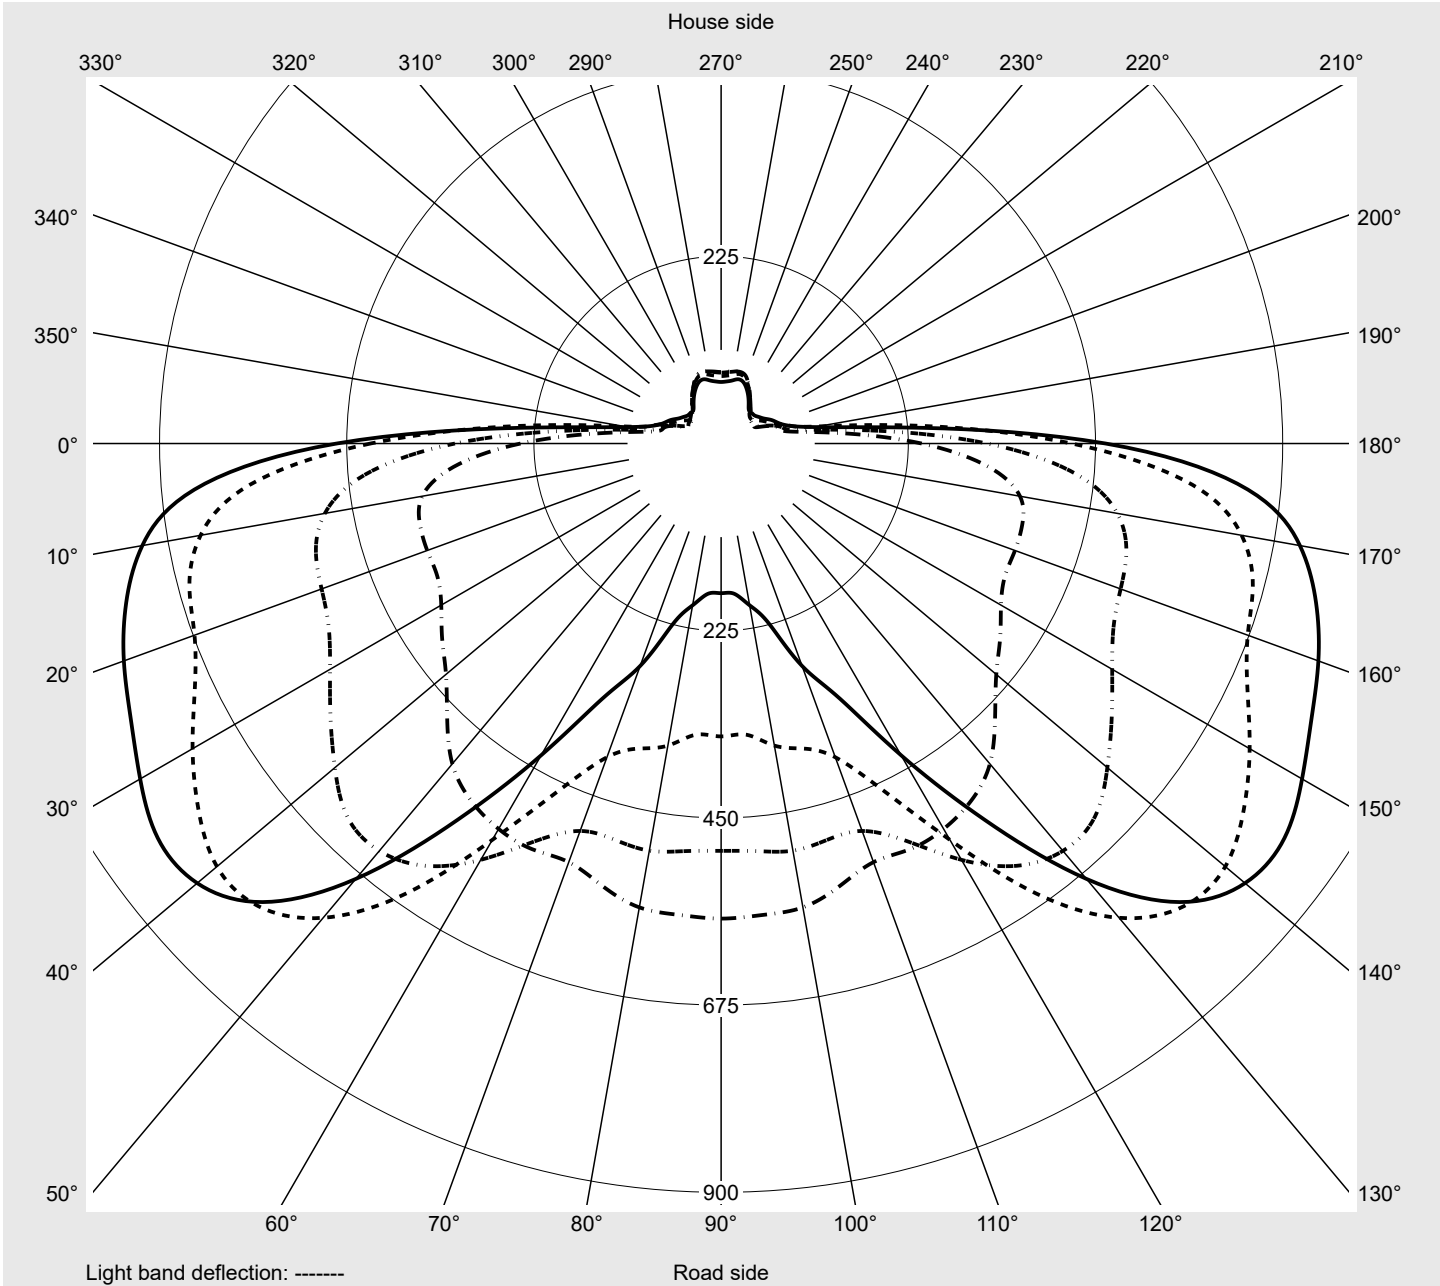

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682D3D4AC</b> <b>EAN: 405835222997</b>	<b>LP number</b> 58577_10
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	253.4	254.9	256.4	258.0	259.5	261.1	262.4	263.4	264.5	265.4	266.3	266.9	267.4
5,0°	252.0	255.2	258.3	261.1	263.7	266.3	268.4	270.1	271.6	272.8	273.7	274.6	275.2
7,5°	249.9	254.7	259.0	262.7	265.9	268.8	271.0	272.7	273.9	274.6	275.1	275.5	275.5
10,0°	247.1	253.2	258.3	262.6	266.1	268.7	270.7	271.8	272.0	271.6	270.6	269.4	267.8
12,5°	242.8	250.3	256.3	260.8	264.0	266.2	267.2	266.9	265.2	262.4	259.1	255.6	252.1
15,0°	237.8	246.4	253.0	257.5	260.3	261.5	261.0	258.6	254.4	249.3	243.9	238.7	233.5
17,5°	231.4	241.9	248.9	253.2	255.1	254.7	251.9	246.8	240.3	233.3	226.3	219.9	214.0
20,0°	226.5	237.3	244.7	248.7	249.4	247.0	241.7	234.4	226.2	217.9	210.2	203.6	198.3
22,5°	220.6	233.3	240.9	244.1	243.3	238.5	230.9	221.6	211.9	203.1	195.7	190.4	186.7
25,0°	217.2	230.8	238.8	241.4	238.8	231.5	221.3	210.4	200.2	191.7	186.1	183.2	182.9
27,5°	211.9	228.0	237.0	239.2	235.0	225.4	213.2	201.1	191.1	184.3	181.2	182.4	186.4
30,0°	206.3	222.9	232.5	234.4	229.0	218.0	204.9	192.3	183.6	179.2	180.9	187.1	195.9
32,5°	200.5	218.7	228.7	229.0	221.2	208.7	195.3	183.8	176.9	177.0	184.1	197.2	213.7
35,0°	196.2	216.1	227.0	225.9	216.5	202.5	188.2	177.1	173.1	178.5	193.9	217.2	243.3
37,5°	192.8	214.5	225.3	223.2	212.3	197.3	182.7	173.2	175.3	188.7	214.0	245.7	277.7
40,0°	189.6	213.1	223.4	221.9	210.0	194.2	180.3	175.9	185.7	207.5	240.4	277.4	310.3
42,5°	185.7	211.7	222.8	221.5	208.9	192.7	181.7	184.0	201.8	231.7	270.0	304.6	334.6
45,0°	183.0	210.3	223.6	222.1	209.1	193.9	187.2	195.2	220.8	254.0	286.5	314.9	338.2
47,5°	180.3	212.5	227.7	225.4	212.0	199.0	194.8	210.1	240.6	271.7	299.3	321.7	340.0
50,0°	180.9	217.4	236.4	236.0	222.7	210.3	212.6	234.2	263.6	291.2	311.5	327.9	344.0
52,5°	185.1	227.1	248.8	248.6	237.5	229.9	238.2	261.0	287.4	309.3	325.3	338.1	360.6
55,0°	191.0	242.1	268.8	270.6	261.4	258.5	268.5	289.3	310.3	327.0	343.8	368.9	407.8
57,5°	209.2	271.8	303.8	307.5	302.1	301.4	312.0	330.2	348.5	367.0	400.1	440.6	473.6
60,0°	241.1	322.9	364.8	374.8	375.9	376.5	388.5	409.3	431.7	465.7	502.6	524.1	534.9
62,5°	320.0	429.7	483.6	504.3	511.0	520.5	542.8	573.2	606.0	635.1	639.1	619.6	577.8
65,0°	421.5	568.6	635.3	661.7	673.6	698.0	733.6	767.0	791.1	786.5	744.2	660.3	550.1
67,5°	462.2	635.6	706.4	740.4	764.0	783.0	806.3	826.7	822.1	779.5	683.1	552.0	432.7
70,0°	439.4	623.7	722.7	767.0	750.7	724.1	713.8	699.9	659.8	581.1	469.0	370.0	297.7
72,5°	145.9	232.6	294.5	375.4	459.3	476.0	466.3	444.0	388.2	309.7	247.5	213.0	182.8
75,0°	37.2	40.5	45.0	53.0	97.4	158.1	175.4	167.3	114.0	78.9	104.0	105.0	101.6
77,5°	20.7	22.2	22.7	23.3	27.5	36.2	40.8	28.4	24.8	24.4	34.4	39.0	40.2
80,0°	12.0	11.3	11.0	11.2	12.5	15.0	15.0	13.6	13.3	14.0	15.0	15.3	17.0
82,5°	6.5	6.1	6.1	6.4	6.7	7.4	8.2	7.9	8.1	8.3	8.4	8.3	9.7
85,0°	2.9	2.6	2.6	2.7	2.9	3.3	3.5	3.6	3.7	3.7	3.7	3.5	3.4
87,5°	1.1	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682D3D4AC</b> <b>EAN: 405835222997</b>	<b>LP number</b> <b>58577_10</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8
2,5°	267.8	268.1	268.4	268.7	269.0	269.1	251.7	249.8	248.0	246.2	244.3	242.6	240.9
5,0°	275.6	275.9	276.3	276.7	277.0	277.2	248.2	244.0	239.6	235.0	230.4	225.8	221.2
7,5°	275.3	275.0	274.9	275.0	275.2	275.3	244.1	237.5	230.3	222.6	214.9	207.0	199.0
10,0°	266.2	264.6	263.6	263.3	263.3	263.4	239.2	230.0	219.9	209.1	197.8	186.7	175.8
12,5°	248.8	245.9	244.1	243.2	242.9	242.8	233.0	221.3	208.1	194.3	180.0	166.3	153.4
15,0°	229.0	225.2	222.6	221.2	220.6	220.5	225.8	211.4	195.4	178.7	162.2	147.1	133.8
17,5°	208.9	204.9	202.1	200.5	199.8	199.6	218.1	201.1	182.2	163.2	145.3	130.0	118.1
20,0°	194.2	190.6	188.5	187.4	186.9	186.9	210.5	191.0	169.3	148.6	130.5	116.8	108.2
22,5°	184.6	183.4	183.1	183.6	184.2	184.5	203.2	181.1	157.2	135.5	118.4	107.6	102.4
25,0°	183.9	185.6	187.8	190.6	192.6	193.2	196.4	171.4	145.9	124.0	108.9	101.9	98.7
27,5°	191.2	195.9	201.2	207.0	210.4	211.0	189.8	162.2	135.0	114.2	102.5	98.0	95.9
30,0°	205.1	213.5	222.6	232.7	237.7	236.4	180.8	151.5	124.3	105.4	97.8	94.9	93.3
32,5°	230.0	245.0	259.2	272.2	276.6	274.1	173.5	141.9	114.7	99.0	94.1	92.1	89.3
35,0°	266.1	285.6	303.5	314.0	314.9	314.8	166.4	132.6	105.7	94.0	90.6	87.5	77.7
37,5°	302.9	322.5	336.8	344.3	344.8	346.7	159.8	124.3	99.1	90.5	86.2	78.6	69.8
40,0°	334.1	349.7	360.6	366.5	368.0	370.1	152.8	115.7	93.0	86.9	78.0	69.3	66.7
42,5°	355.7	366.5	373.9	378.8	379.7	380.7	146.0	108.2	88.4	83.7	69.4	64.4	64.2
45,0°	355.2	361.7	368.1	374.9	377.3	378.9	139.2	100.1	84.1	80.3	63.5	61.4	61.9
47,5°	355.8	364.3	376.0	391.6	399.1	402.5	134.3	94.7	80.7	77.3	60.3	58.8	59.5
50,0°	364.3	384.7	407.6	433.1	445.9	450.5	128.9	89.3	77.4	74.2	56.6	56.3	56.6
52,5°	395.5	433.8	469.8	502.4	520.5	526.0	127.0	85.5	75.0	71.2	53.7	53.7	53.9
55,0°	451.6	493.4	531.1	562.3	577.5	583.0	126.6	82.7	72.8	68.1	50.9	50.9	51.5
57,5°	505.1	534.7	563.2	583.5	589.7	591.1	130.5	81.8	71.5	64.9	48.4	48.1	48.7
60,0°	537.9	535.5	550.7	566.1	568.8	571.0	143.7	83.2	71.6	61.8	46.4	45.4	46.3
62,5°	527.1	495.6	493.1	496.9	491.8	489.6	180.3	94.3	75.5	63.3	49.3	45.8	44.7
65,0°	459.5	401.3	379.6	368.7	351.4	352.1	243.0	118.3	84.1	70.3	61.3	55.1	48.7
67,5°	338.8	284.5	225.0	197.5	181.3	179.9	221.0	113.9	83.3	72.8	66.8	59.9	55.6
70,0°	242.2	200.8	99.2	72.0	66.9	70.0	138.6	70.9	68.1	65.0	60.1	57.1	54.6
72,5°	153.6	125.3	46.7	33.4	33.1	33.4	51.7	32.6	30.8	31.9	33.7	38.5	41.9
75,0°	88.5	70.5	31.8	25.1	24.4	24.4	24.5	22.0	22.0	21.9	22.6	24.1	25.8
77,5°	35.9	33.1	21.4	17.3	16.4	16.6	16.0	15.4	16.0	16.0	16.6	17.6	18.8
80,0°	18.9	16.9	12.5	11.1	10.6	10.6	11.8	10.4	10.4	10.7	11.3	11.9	12.5
82,5°	11.3	9.5	6.6	5.8	5.4	5.4	6.5	5.9	6.2	6.6	7.1	7.3	7.5
85,0°	3.2	2.9	2.4	2.2	2.1	2.0	2.7	2.7	3.0	3.3	3.4	3.6	3.6
87,5°	0.8	0.8	0.8	0.8	0.9	0.9	1.1	1.2	1.2	1.2	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682D3D4AC</b> <b>EAN: 4058352222997</b>	<b>LP number</b> <b>58577_10</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	253.8	0.4	0.4
2,5°	239.2	237.4	235.7	234.3	233.0	231.9	230.8	229.9	229.2	228.9	228.8	3.0	3.4
5,0°	216.6	212.2	208.0	204.2	200.8	198.0	195.3	193.3	191.8	191.1	190.8	5.8	9.2
7,5°	191.3	184.0	177.3	171.3	166.0	161.5	157.7	154.8	152.7	151.6	151.2	8.2	17.4
10,0°	165.6	156.3	148.0	140.8	134.8	129.9	126.0	123.1	121.2	120.1	119.8	10.3	27.7
12,5°	141.7	131.9	123.8	117.4	112.5	109.1	106.7	105.1	104.1	103.5	103.2	12.0	39.7
15,0°	123.0	114.7	109.2	105.6	103.1	101.2	99.7	98.5	97.8	97.3	97.2	13.5	53.2
17,5°	110.2	105.7	102.7	100.5	98.6	97.1	95.7	94.7	94.1	93.6	93.4	14.7	67.9
20,0°	103.7	101.0	99.1	97.4	95.9	94.4	93.1	92.2	91.5	91.1	90.8	15.9	83.8
22,5°	99.7	97.8	96.4	95.1	93.8	92.5	91.1	89.6	89.2	89.1	89.1	17.1	100.9
25,0°	96.8	95.4	94.0	93.1	91.4	85.6	79.7	77.9	77.3	76.9	76.6	18.2	119.1
27,5°	94.3	91.9	89.6	84.7	75.7	71.6	70.1	69.0	68.2	67.7	67.4	19.5	138.6
30,0°	88.9	83.4	79.2	72.9	71.1	70.3	69.5	68.7	67.9	67.3	67.0	21.0	159.6
32,5°	78.1	73.8	71.5	70.7	70.3	69.5	68.1	66.7	65.4	64.4	64.0	22.9	182.5
35,0°	70.8	70.1	69.9	69.6	68.3	66.7	65.1	63.9	62.8	62.1	61.7	25.1	207.6
37,5°	68.6	68.4	68.2	66.9	65.5	64.6	63.7	62.7	61.7	60.7	60.2	27.5	235.1
40,0°	66.6	66.6	65.6	64.6	64.0	63.2	62.6	61.9	60.8	59.7	59.0	30.0	265.1
42,5°	64.7	64.2	63.9	63.6	63.2	62.6	62.3	62.0	61.2	59.9	59.0	32.3	297.4
45,0°	62.3	62.5	62.8	62.7	63.0	63.3	63.4	63.0	62.3	61.0	59.9	34.0	331.4
47,5°	60.2	61.2	61.9	62.5	63.8	64.1	64.6	64.7	64.3	63.1	62.2	36.2	367.6
50,0°	57.7	59.3	61.1	62.1	64.0	65.2	66.6	67.6	67.6	66.6	66.0	39.4	407.0
52,5°	55.2	57.1	59.3	61.1	63.9	67.1	70.6	73.2	73.6	72.9	72.2	44.1	451.1
55,0°	52.8	54.9	57.6	60.6	64.8	70.4	76.4	80.6	80.3	79.6	79.1	49.5	500.6
57,5°	50.5	52.7	56.2	60.6	66.5	74.0	82.1	86.7	86.3	85.6	84.1	55.7	556.3
60,0°	48.1	50.9	55.3	61.1	68.7	77.7	86.5	89.1	88.1	86.8	85.9	63.4	619.7
62,5°	46.1	49.1	54.2	61.1	69.2	77.8	85.6	89.4	87.8	86.1	85.2	74.4	694.1
65,0°	46.4	48.2	53.2	60.1	68.5	76.8	83.7	86.3	83.9	82.0	81.1	84.5	778.5
67,5°	52.5	52.0	52.1	57.7	65.3	72.5	78.4	80.0	76.9	74.9	74.0	82.2	860.7
70,0°	54.5	58.5	57.0	53.9	59.7	65.6	69.8	70.5	67.6	65.1	64.4	69.4	930.2
72,5°	52.2	57.1	55.0	50.9	51.3	55.5	58.3	58.3	55.1	53.4	54.1	39.8	969.9
75,0°	28.6	36.9	40.3	39.0	41.6	44.9	46.8	46.1	43.2	41.5	42.5	15.6	985.6
77,5°	20.4	22.6	25.3	28.0	30.9	33.4	34.8	33.4	31.1	29.8	29.9	7.0	992.5
80,0°	13.6	15.1	17.0	19.0	21.0	22.4	23.0	21.8	20.4	19.5	19.3	4.0	996.5
82,5°	8.0	8.7	9.6	10.5	11.0	11.5	11.5	11.1	10.4	10.1	10.0	2.2	998.8
85,0°	3.6	3.8	4.1	4.4	4.7	5.0	5.2	5.0	4.7	4.6	4.5	1.0	999.7
87,5°	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682D3D4AC</b> <b>EAN: 4058352222997</b>	<b>LP number</b> 58577_10
---	---	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	18250	142.0
95	241	252	17338	134.1
90	226	250	16425	126.2
85	211	247	15513	118.6
80	197	245	14600	111.1
75	185	242	13688	103.6
70	171	239	12775	96.3
65	157	236	11863	89.2
60	144	233	10950	82.2
55	130	230	10038	75.4
50	118	226	9125	68.6
45	106	222	8213	61.9
40	94	217	7300	55.3
35	81	212	6388	48.9
30	69	206	5475	42.6
25	57	199	4563	36.4
20	45	191	3650	30.3
15	34	181	2737	24.2