


**Order No.:** 51FA20DP430B | **GTIN (EAN):** 4058352419588


**Product description:** Mon31,diff,3800lm840,DA2,3x2.5<sup>2</sup>,3x1.5<sup>2</sup>



Monsun 31, damp-proof luminaire, primary optical cover: diffuser, of PC, frosted, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 3.800lm, luminous efficacy: 136lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI 2, with terminal, 5+1-pole, max. 2.5mm<sup>2</sup>, through-wiring: 3x 2.5mm<sup>2</sup> + 3x 1.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, rated input power: 28W, housing, luminaire housing, of PC, light grey (RAL 7035), length: 1.458mm, width: 68mm, height: 76mm, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, UKCA, protection symbol: D, impact resistance: IK08, permissible operating ambient temperature: -20..+40°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, packaging unit: 1 piece



Lamps: LED  
Wt. (kg): 1.5  
GTIN (EAN): 4058352419588

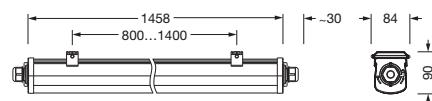

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51FA20DP430B | GTIN (EAN): 4058352419588

**Detailed technical description:** Mon31,diff,3800lm840,DA2,3x2.5<sup>2</sup>,3x1.5<sup>2</sup>



#### Key data

- Product type: damp-proof luminaire
- Product name: Monsun 31
- Order No.: 51FA20DP430B

#### Lighting technology | Lamps | Control gear

##### Component 1

###### Lighting technology:

- Cover: diffuser, frosted
- Beam angle: diffuse distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 22
- UGR viewing direction along lateral luminaire axis: ≤ 22

###### Lamps:

- Lamps: with LED
- Rated luminous flux: 3800lm
- Luminous efficacy: 136lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 4 SDCM (initial)
- Rated input power: 28W

###### Operating device:

- Control gear: ECG
- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK08
- Protection symbol: D
- Temperature range (operation): - 20..+40°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Certification, designation: CE, ENEC, UKCA

#### Material, Colour

- housing: PC, light grey (RAL 7035)
- luminaire housing: PC, light grey (RAL 7035)
- Colour specification: light grey (RAL 7035)
- Cover: diffuser of PC

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: terminal, 5+1-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC
- Through-wiring: 3x 2.5mm<sup>2</sup> + 3x 1.5mm<sup>2</sup>

#### Dimensions, Weight

- Length: 1458mm
- Width: 68mm
- Height: 76mm
- Weight: 1.5kg


#### Service life

- Rated service life: 50000h (L80) at AT = 25°C

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51FA20DP430B | **GTIN (EAN):** 4058352419588

**Dimensions:** Mon31,diff,3800lm840,DA2,3x2.5<sup>2</sup>,3x1.5<sup>2</sup>

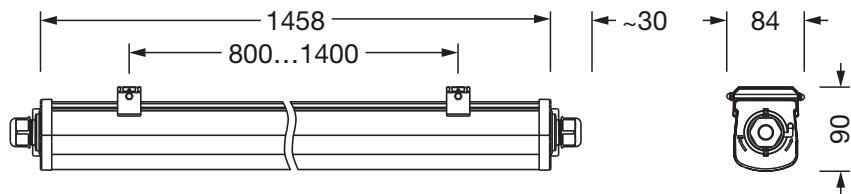

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -


**Order No.:** 51FA20DP430B | **GTIN (EAN):** 4058352419588

**Planning data:** Mon31,diff,3800lm840,DA2,3x2.5<sup>2</sup>,3x1.5<sup>2</sup>

## 51FA20DP430B: 1x LED

4058352419588

51FA20DP430B

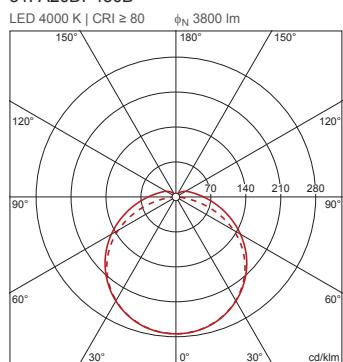

$\phi_{\downarrow}$  91%    $\phi_{\uparrow}$  9%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	6523	7134
L <sub>70</sub>	7053	10012
L <sub>65</sub>	7407	10676

UGR 25 24.2

X 4H Y 8H p 70/50/20 S 0.25H

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -