

Order No.: 5XA5132T1B08A1 | GTIN (EAN): 4058352059609


Product description: DL30,P1.0a,1400lm830,Plus



DL 30 LED, mast luminaire, primary light control with 3 zone faceted reflector, of plastic, aluminium vapourised, highly specular, primary optical cover: cover, of PMMA, structured, transparent, light distribution: P1.0a, light emission: direct distribution, primary light characteristic: asymmetric, installation type: post-top, LED, High Power LED, rated luminous flux: 1.400lm, luminous efficacy: 107lm/W, light colour: 830, colour temperature: 3000K, control gear: Plus, control: flexible luminous flux parameterisation, time-dependent luminous flux control, constant luminous flux control, digital communication interface, power reduction, electronic power reduction, mains connection: 230..240V, AC, 50/60Hz, start of lifetime: 13W, end of service life: 14W, reduction: 7W, luminaire housing, of diecast aluminium, powder-coated, SITECO metallic grey (DB 702S), length: 600mm, width: 510mm, height: 290mm, spigot size: d x l = 76 x 100mm (post-top) | with reducer (optional accessory) 60 x 100mm, mounting height: 3..6m, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, VDE, impact resistance: IK08, permissible operating ambient temperature: -25..+45°C, standard-compliant lighting for roads and squares, packaging unit: 1 piece



Lamps: LED  
Wt. (kg): 7.7  
GTIN (EAN): 4058352059609

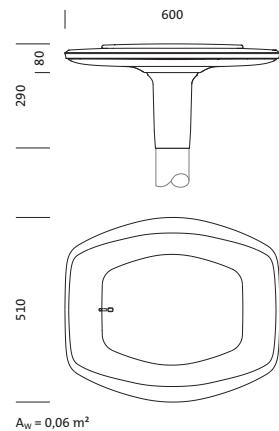

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5XA5132T1B08A1 | GTIN (EAN): 4058352059609

**Detailed technical description: DL30,P1.0a,1400lm830,Plus**



#### Key data

- Product type: mast luminaire
- Product name: DL 30 LED
- Order No.: 5XA5132T1B08A1

#### Lighting technology | Lamps | Control gear

##### Component 1

###### Lighting technology:

- Light control: 3 zone faceted reflector of plastic, aluminium vaporised, highly specular
- Cover: cover, transparent, structured
- Light distribution: P1.0a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

###### Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 1400lm
- Luminous efficacy: 107lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 5 SDCM (initial)
- Rated input power begin service life: 13
- Rated input power end service life: 14
- Rated input power at 50% lumin. flux: 7

###### Operating device:

- Control gear: ECG Plus
- Control: Plus
- Equipment: power reduction, digital communication interface, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation
- Switching method: electronic power reduction

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK08
- Temperature range (operation): - 25..+45°C
- Supplement: standard-compliant lighting for roads and squares
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- luminaire housing: diecast aluminium, powder-coated, SITECO metallic grey (DB 702S)
- Colour specification: SITECO metallic grey (DB 702S)
- Cover: cover of PMMA

#### Mounting

- Mounting method, mounting location: post-top, on mast

#### Electrical connection

- Nominal voltage: 230..240V, 50/60Hz, AC
- Surge voltage resistance: 6kV 1.2/50μs

#### Dimensions, Weight

- Length: 600mm
- Width: 510mm
- Height: 290mm
- Weight: 7.7kg
- Mast spigot: spigot size: d x l = 76 x 100mm (post-top) | with reducer (optional accessory) 60 x 100mm

#### Light emission

- Light emission: 0%


#### Service life

- Rated service life: 100000h (L97/B10) at AT = 25°C

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XA5132T1B08A1 | **GTIN (EAN):** 4058352059609

**Dimensions:** DL30,P1.0a,1400lm830,Plus

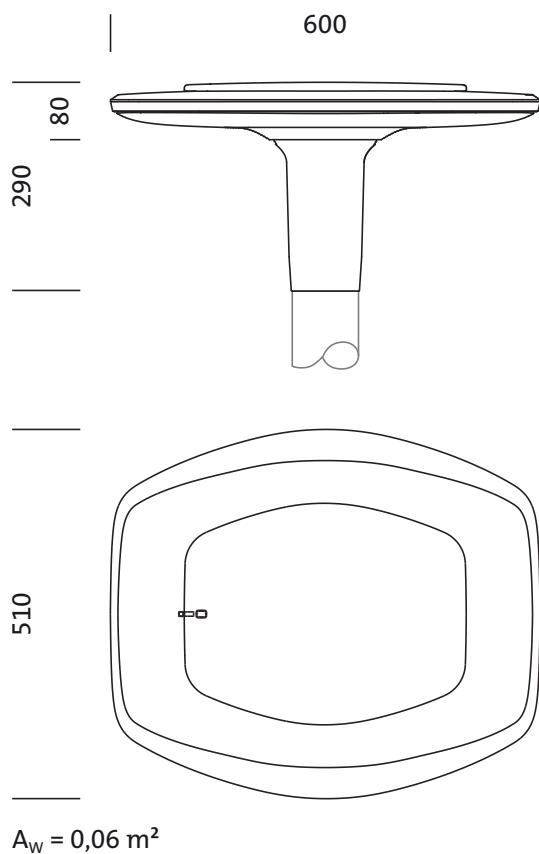

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -


**Order No.:** 5XA5132T1B08A1 | **GTIN (EAN):** 4058352059609

**Planning data:** DL30,P1.0a,1400lm830,Plus

## 5XA5132T1B08A1: 1x LED

4058352059609

5XA5132T1B08A1

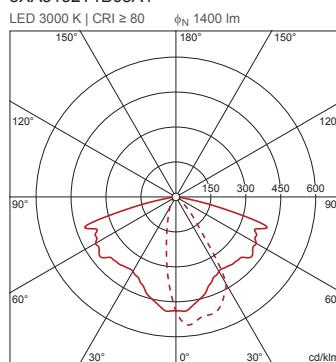

C 0/180      C 90/270

Luminous intensity class according to  
EN13201-2: G3

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -