ѕітесо


Order No.: 59MX1BW100WA | GTIN (EAN): 4058352774960 Product description: Sil21,SensMoPR3S,lokCtrl,PIR-sens



Silica® 21sensor module PR3-S, slave, local control, dimmable, installation arrangement: single/continuous arrangement, installation type: slip-in mounting, installation location: to the luminaire, of extruded aluminium section, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece

```
IP 20 🔔 🤆
```

Wt. (kg): 0.3 GTIN (EAN): 4058352774960



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 17.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

ѕітесо

Order No.: 59MX1BW100WA | GTIN (EAN): 4058352774960 Detailed technical description: Sil21,SensMoPR3S,lokCtrl,PIR-sens

Key data

- System family: SITECO Connect 31 Wireless
- Product type: lighting management components
- Product name: Silica[®] 21
- Order No.: 59MX1BW100WA

Lighting technology | Lamps | Control gear

Component 1

Operating device:

 Control: Bluetooth[®] mesh 4.2, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE

Material, Colour

- housing: extruded aluminium section, anodised, traffic white (RAL 9016), for luminaires with opal or prismatic cover
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: slip-in mounting, to the luminaire
- Mounting height: 2.5..5m
- Arrangement: single/continuous arrangement
- Supplement: for recessed luminaires

Dimensions, Weight

- Length: 139mm
- Width: 53mm
- Height: 54mm
- Weight: 0.3kg


Inputs

1x PIR movement sensor

 Connection: PIR sensor (passiveinfrared)

ѕітесо

Order No.: 59MX1BW100WA | GTIN (EAN): 4058352774960 Dimensions: Sil21,SensMoPR3S,lokCtrl,PIR-sens

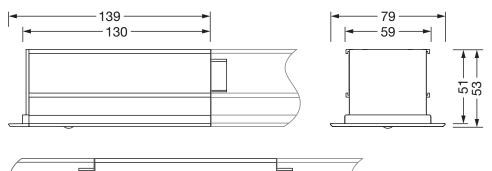



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 17.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -