

Order No.: 51DR10MDGBB | **GTIN (EAN):** 4069025152053


Product description: Lun41Flat, Ø150, 1530lm830/840, MLwh



Lunis 41 Flat, downlight, optical cover: cover, of PC, light emission: direct distribution, LED rated luminous flux: 1.530lm, light colour: 830/840, mains connection: 230V, AC, 50/60Hz, housing, round, of aluminium, coated, traffic white (RAL 9016), diameter: 170mm, protection rating (complete): IP20, protection rating (on room side): IP44, insulation class (complete): insulation class II (safety insulation), certification: CE, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 20 CE

Lamps: LED
Wt. (kg): 0.5
GTIN (EAN): 4069025152053

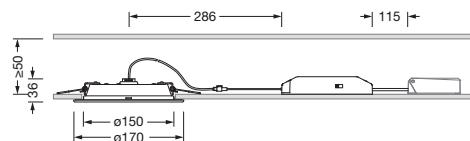

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 20.12.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51DR10MDGBB | **GTIN (EAN):** 4069025152053

Detailed technical description: Lun41Flat, Ø150, 1530lm 830/840, MLwh



Key data

- Product type: downlight
- Product name: Lunis 41 Flat
- Order No.: 51DR10MDGBB

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 1530lm
- Luminous efficacy: 122lm/W
- Colour temperature: 3000/4000K
- Colour rendering index: CRI > 80
- Light colour: 830/840
- Rated input power: 12.5W
- Supplement: luminous flux adjustable on luminaire in two steps at 3000K (765/1530lm), luminous flux adjustable on luminaire in two steps at 4000K (790/1580lm)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP44
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): - 20..+40°C
- Certification, designation: CE

Material, Colour

- housing: aluminium, coated, traffic white (RAL 9016), round
- Colour specification: traffic white (RAL 9016)
- Cover: cover of PC

Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Ø of ceiling cut-out: 150mm
- Arrangement: single arrangement

Electrical connection

- Nominal voltage: 230V, 50/60Hz, AC

Dimensions, Weight


- Diameter: 170mm
- Height: 19mm
- Weight: 0.5kg

Service life

- Rated service life: 30000h (L70/B50) at AT = 25°C

Order No.: 51DR10MDGBB | **GTIN (EAN):** 4069025152053

Dimensions: Lun41Flat, Ø150, 1530lm830/840, MLwh

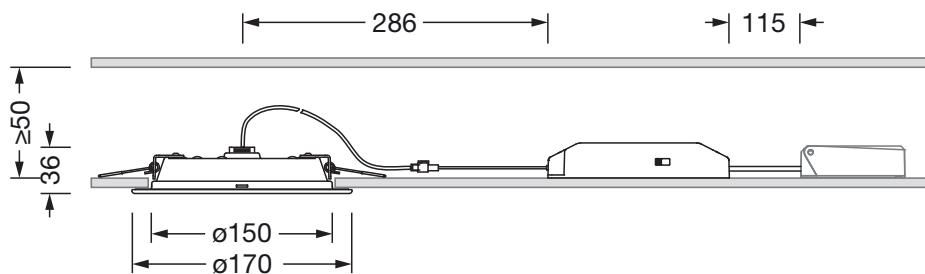

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 20.12.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -