


Order No.: 53BD812MV485C2 | **GTIN (EAN):** 4069025185914


Product description: DUS31G2,LI,wd,8950lm840,ML,wh,5su



DUS 31 Gen.2, luminaire insert, of sheet steel, coil coated, white, length: 1.535mm, width: 81mm, height: 90mm, 5x system unit, system units: 307mm, LED rated luminous flux: 8.950lm, light colour: 840, SDCM (Standard Deviation of Colour Matching) MacAdam \leq 3 SDCM (initial), control gear: ON/OFF Multilumen, control gear: ECG, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 48W, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -35..+50°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, The light source and the operating device comply with the requirements of the Ecodesign Regulation (EU) 2019/2020 and are replaceable in accordance with this regulation, packaging unit: 1 piece



Lamps: LED
Wt. (kg): 1.8
GTIN (EAN): 4069025185914

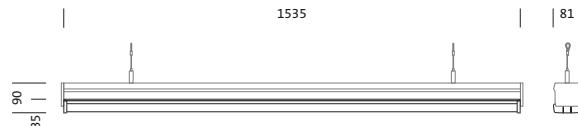

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 06.12.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 53BD812MV485C2 | GTIN (EAN): 4069025185914

Detailed technical description: DUS31G2,LI,wd,8950lm840,ML,wh,5su



Key data

- Product type: luminaire insert
- Product name: DUS 31 Gen.2
- Order No.: 53BD812MV485C2

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 25
- UGR viewing direction along lateral luminaire axis: ≤ 25

Lamps:

- Lamps: with LED
- Rated luminous flux: 8950lm
- Luminous efficacy: 186lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 48W

Operating device:

- Control gear: ECG
- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): - 35..+50°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in DUS mounting rail
- Colour specification: white
- Cover: cover of PMMA

Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- System units: 5x SE
- Length: 1535mm
- Width: 81mm
- Height: 90mm
- Weight: 1.8kg

Service life

- Rated service life: 70000h (L80) at AT = 25°C, 70000h (L80) at AT = ta max

Order No.: 53BD812MV485C2 | **GTIN (EAN):** 4069025185914

Dimensions: DUS31G2,LI,wd,8950lm840,ML,wh,5su

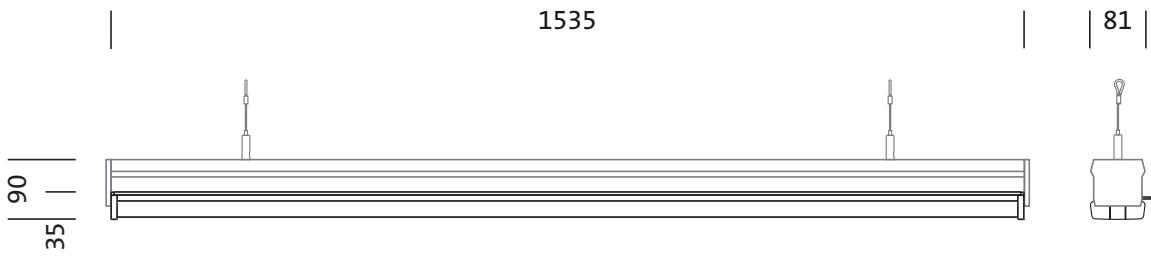

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 06.12.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -