

Order No.: 51MP25WM2341WA | **GTIN (EAN):** 4069025077943


Product description: APOr,1245x200,3600lm830,ML,IP40,wh



Apollon Rectangular, office luminaire, primary optical cover: micro prismatic cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 3.600lm, luminous efficacy: 132lm/W, light colour: 830, colour temperature: 3000K, control gear: ON/OFF Multilumen, with terminal, 3-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 27W, housing, of sheet steel, coated, traffic white (RAL 9016), length: 1.245mm, width: 200mm, height: 44mm, protection rating (complete): IP20, protection rating (on room side): IP40, protection rating (lamp compartment, on room side): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, UKCA, impact resistance: IK02, permissible operating ambient temperature: -20..+40°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	3.4
GTIN (EAN):	4069025077943

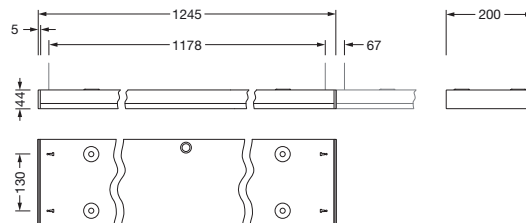

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 22.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51MP25WM2341WA | **GTIN (EAN):** 4069025077943

Detailed technical description: APOr,1245x200,3600lm830,ML,IP40,wh



Key data

- Product type: office luminaire
- Product name: Apollon Rectangular
- Order No.: 51MP25WM2341WA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: micro prismatic cover
- Beam angle: wide distribution, 90°
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 3600lm
- Luminous efficacy: 132lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 27W
- Supplement: with through-wiring, luminous flux adjustable on luminaire in four steps (2900/3600/4100/4700lm), connected load according to luminous flux setting (23/27/33/38W)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP40
- Protection rating (lamp compartment, on room side): IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Temperature range (operation): -20..+40°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry
- Certification, designation: CE, ENEC, UKCA

Material, Colour

- housing: sheet steel, coated, traffic white (RAL 9016)
- Cover: micro prismatic cover of PMMA

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement
- Supplement: luminaire includes fixing accessories for ceiling surface mounting; for other types of installation: please order mounting accessories separately

Electrical connection

- Connection: terminal, 3-pole
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 1245mm
- Width: 200mm
- Height: 44mm
- Weight: 3.4kg

Service life

- Rated service life: 50000h (L80) at AT = 25°C

Order No.: 51MP25WM2341WA | GTIN (EAN): 4069025077943

Dimensions: APOr,1245x200,3600lm830,ML,IP40,wh

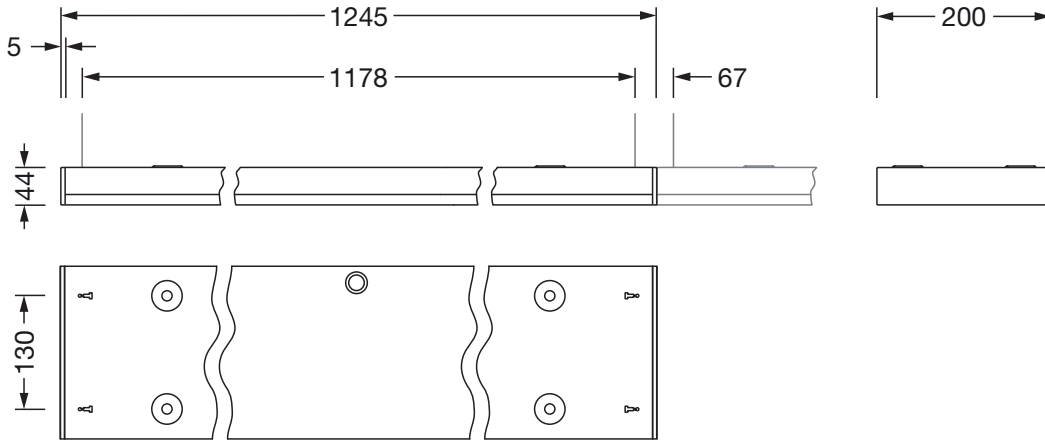

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 22.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -