


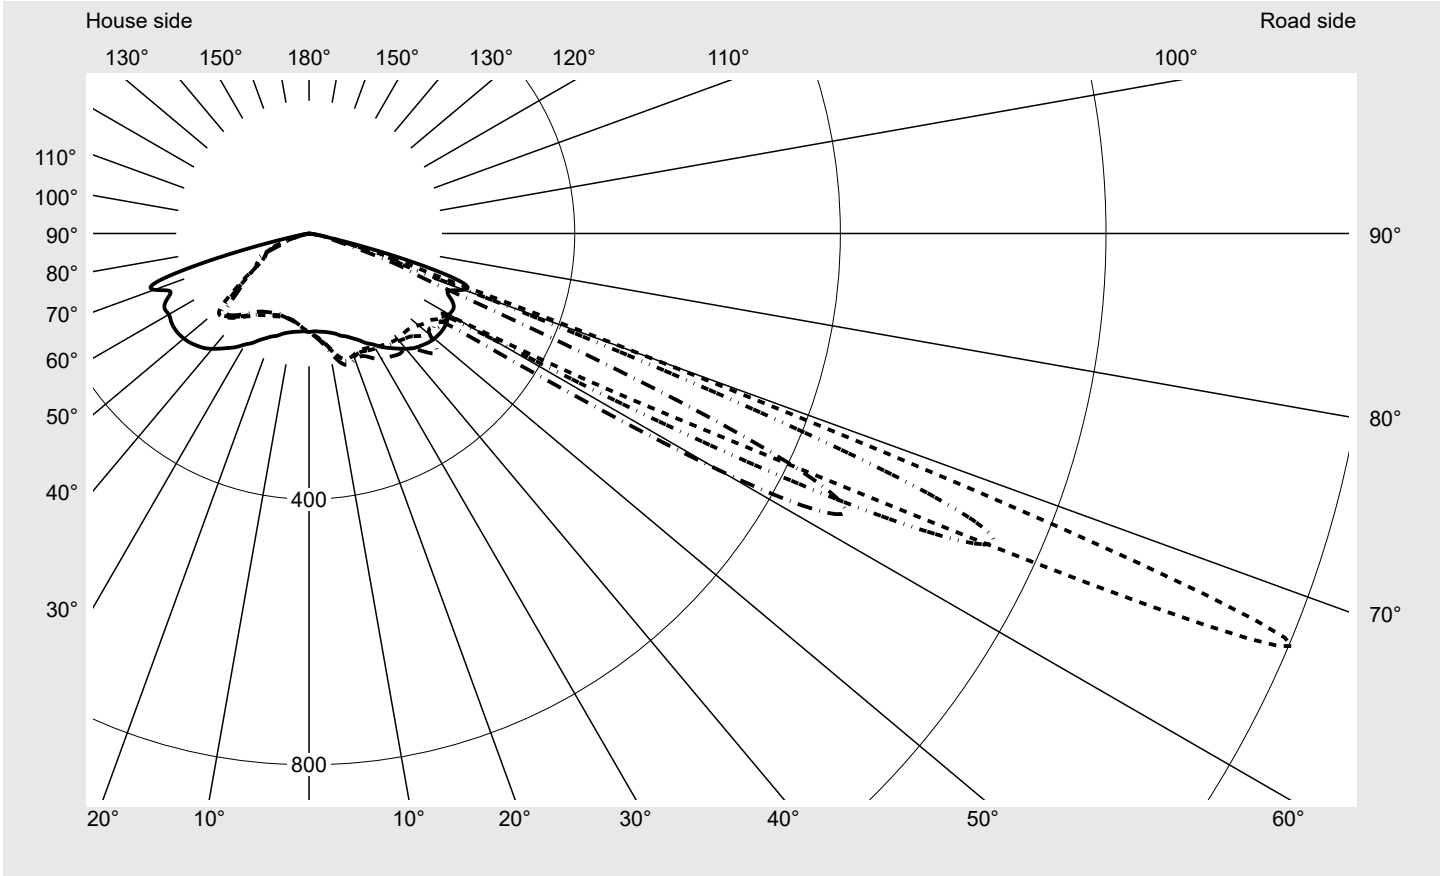
Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
	Version post-top or side-entry mounting Optic asymmetric distribution (PL32) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO Rated values Net luminous flux = 4940 lm Power consumption = 35.5 W Luminous efficacy = 139.2 lm/W	serial documentation 25.08.2025





Luminous intensity in cd/klm C180-0 C245-65 C250-70 C270-90 **Imax: 1590 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	732.5
Imax 80°	42.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
------------------------------------------------	----------------------------------------------------------------	--------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

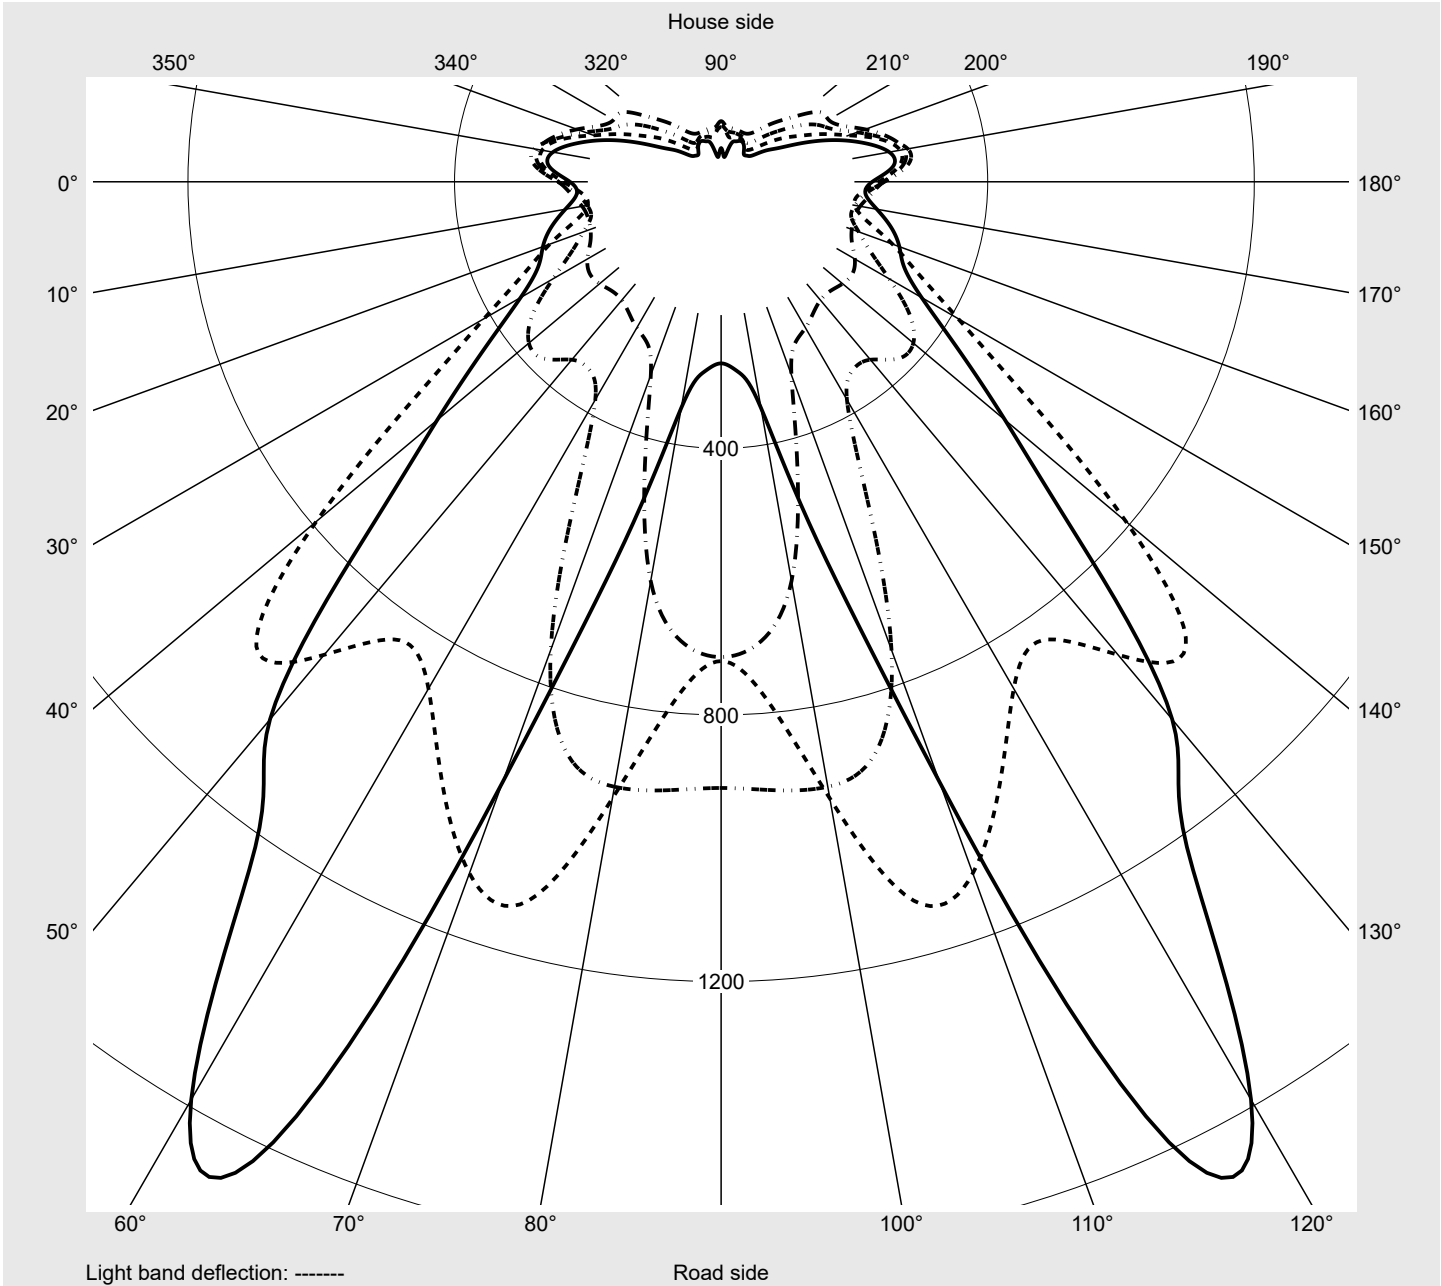

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	147.5	147.7	148.2	148.8	149.3	149.7	150.1	150.5	151.0	151.2	151.6	152.0	152.3
5,0°	148.1	148.8	149.6	150.5	151.5	152.4	153.2	153.9	154.7	155.3	155.9	156.5	157.1
7,5°	149.3	150.3	151.6	152.8	154.2	155.5	156.6	157.8	159.2	160.4	161.7	162.9	164.0
10,0°	150.8	152.3	153.6	155.1	156.9	158.6	160.3	162.3	164.5	166.7	168.7	170.7	172.7
12,5°	153.2	154.9	156.6	158.7	161.0	163.3	165.3	167.1	169.4	172.2	175.8	179.6	183.1
15,0°	156.6	158.5	160.8	163.5	166.3	169.0	171.4	173.6	175.7	177.6	180.4	185.5	191.1
17,5°	161.5	163.7	165.7	168.4	171.4	174.3	177.0	179.5	181.8	183.8	185.5	187.5	192.4
20,0°	165.1	168.5	171.0	174.1	176.3	178.8	181.5	183.8	186.0	187.6	188.7	189.3	190.8
22,5°	170.7	173.7	176.7	179.6	182.3	183.8	185.7	187.4	188.8	189.6	190.1	190.2	190.2
25,0°	177.2	180.3	182.5	185.8	188.3	189.3	190.1	191.0	191.1	191.4	191.6	192.0	191.8
27,5°	185.9	187.9	189.7	191.7	194.6	195.2	194.7	194.3	194.0	193.7	193.9	193.9	193.7
30,0°	193.0	195.9	197.3	198.4	199.8	200.4	199.0	197.8	197.0	196.3	196.3	195.7	195.6
32,5°	202.5	203.8	204.8	205.0	204.9	205.6	203.7	201.6	199.4	198.4	198.6	198.6	199.0
35,0°	210.3	211.7	211.9	210.9	210.1	210.0	208.0	204.8	201.9	200.3	200.6	200.9	201.8
37,5°	218.4	218.5	218.4	216.2	214.8	213.6	210.9	207.5	204.3	202.5	202.1	202.7	204.0
40,0°	226.6	225.1	223.4	220.3	218.2	215.7	213.8	210.8	207.0	204.7	204.0	204.1	205.2
42,5°	233.9	229.3	226.2	222.7	220.0	216.1	214.2	213.0	209.1	206.7	205.1	204.2	205.2
45,0°	238.8	233.5	229.0	224.6	221.7	216.2	212.8	211.8	211.0	208.6	204.5	203.3	204.4
47,5°	243.2	236.1	230.3	225.1	221.5	216.3	212.1	210.9	212.5	209.4	204.2	202.8	204.8
50,0°	246.0	237.2	229.9	225.1	220.2	215.7	212.4	211.6	213.0	212.0	205.2	203.7	207.3
52,5°	247.8	236.6	228.3	223.7	218.6	215.2	213.5	211.8	210.7	212.9	207.8	206.9	211.4
55,0°	247.9	234.2	225.4	219.4	216.5	215.7	216.1	213.7	212.2	214.1	211.4	211.0	218.0
57,5°	246.4	228.9	221.1	214.7	212.3	214.4	219.6	220.1	220.0	219.1	218.0	220.4	228.4
60,0°	243.9	225.0	211.8	206.9	208.6	216.7	231.6	240.5	237.9	231.7	231.9	240.8	253.2
62,5°	245.1	216.4	204.0	202.1	219.7	247.1	291.2	344.6	376.5	375.3	348.5	344.6	377.6
65,0°	236.7	208.7	203.4	226.2	273.6	326.7	410.6	554.3	792.9	986.2	926.4	839.9	878.2
67,5°	226.9	217.7	237.4	264.1	284.6	303.0	347.4	430.5	556.2	758.6	1053.1	1218.6	1590.2
70,0°	247.8	237.5	209.5	169.9	135.0	120.2	130.6	174.7	263.5	365.7	478.5	659.1	732.5
72,5°	237.4	161.0	89.1	48.3	32.5	27.6	30.4	46.4	88.7	160.3	213.7	229.6	201.1
75,0°	143.2	55.4	21.7	14.2	13.6	13.8	14.9	18.8	28.2	61.4	101.5	106.9	95.1
77,5°	47.8	12.0	8.4	8.7	8.8	9.4	9.5	11.9	15.3	23.0	44.7	49.6	46.2
80,0°	13.7	5.3	5.2	5.5	5.6	5.7	6.0	6.7	8.9	11.1	18.7	22.1	20.1
82,5°	3.8	2.8	2.8	2.9	3.1	3.2	3.2	3.4	4.4	5.6	6.8	8.0	8.3
85,0°	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.4	1.5	1.8	1.8	2.0	2.1
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3
2,5°	152.7	153.0	153.2	153.2	153.4	153.5	147.3	146.7	146.6	146.4	146.0	145.8	145.7
5,0°	157.7	158.3	158.9	159.4	159.7	159.8	147.5	146.6	145.9	145.4	144.6	143.9	143.4
7,5°	164.8	165.6	166.6	167.6	168.5	168.9	148.1	146.7	145.7	144.6	143.5	142.5	141.5
10,0°	174.1	175.2	176.1	177.8	179.7	180.5	149.0	147.3	145.9	144.4	143.0	141.7	140.4
12,5°	186.1	188.0	188.5	190.1	192.9	194.3	150.8	148.8	147.0	145.2	143.5	141.9	140.2
15,0°	194.9	198.0	198.7	199.3	202.4	204.2	154.3	152.0	150.0	147.7	145.6	143.7	141.8
17,5°	197.2	200.0	201.4	200.6	203.1	205.6	158.6	155.9	153.1	150.5	148.2	146.3	144.5
20,0°	195.1	197.8	199.4	199.1	199.8	202.0	161.7	159.2	156.4	153.9	151.3	148.9	146.6
22,5°	192.1	194.9	196.8	197.2	198.2	200.5	166.8	164.9	162.7	159.7	156.7	153.4	150.1
25,0°	192.1	195.5	198.7	199.8	200.6	204.2	174.1	171.6	170.1	166.6	162.7	158.2	153.9
27,5°	193.7	197.8	203.2	205.9	206.1	212.2	182.4	180.0	177.2	174.5	169.6	164.3	158.6
30,0°	196.7	200.2	207.1	210.2	209.8	218.5	190.8	188.8	185.8	181.5	177.2	170.1	163.2
32,5°	200.4	202.9	207.4	209.5	209.7	221.2	199.9	198.2	195.3	190.2	183.6	177.8	169.1
35,0°	202.9	205.8	207.0	209.1	210.0	224.4	209.9	208.8	206.0	200.2	191.7	183.5	177.5
37,5°	205.5	207.9	208.8	209.9	211.5	226.8	219.1	219.1	216.5	210.2	201.5	192.0	184.1
40,0°	207.0	211.0	212.6	213.1	218.3	225.8	228.5	229.5	227.3	220.6	211.3	201.3	193.2
42,5°	207.4	214.2	217.3	222.1	232.8	235.9	237.6	239.8	238.5	230.8	220.7	210.2	201.3
45,0°	207.1	218.9	229.5	232.8	249.5	253.7	244.8	249.2	248.9	240.5	228.6	216.9	207.7
47,5°	209.7	228.2	240.7	241.1	256.8	261.3	251.4	257.6	256.9	247.5	234.2	221.7	212.8
50,0°	215.2	234.1	242.8	237.7	238.9	238.1	257.2	265.4	263.4	251.7	236.4	223.8	214.8
52,5°	220.9	235.8	236.6	229.8	233.4	232.8	261.7	271.8	267.6	251.8	235.1	223.1	213.7
55,0°	226.4	234.2	231.6	229.7	237.8	239.0	266.0	276.0	268.4	248.8	227.1	214.3	207.5
57,5°	233.5	241.3	246.5	256.4	286.3	304.6	270.1	278.4	265.8	240.1	211.7	198.4	196.3
60,0°	265.0	308.4	442.0	608.3	691.7	713.1	273.1	279.1	259.9	230.0	199.5	186.2	181.8
62,5°	512.4	747.5	889.7	921.7	916.4	909.5	280.5	284.4	253.3	217.1	186.3	169.9	148.4
65,0°	991.5	1104.2	1116.7	939.4	778.8	719.2	267.7	272.8	247.1	203.7	169.4	138.4	114.7
67,5°	1590.2	958.6	558.5	344.6	285.8	272.4	258.6	256.3	223.6	182.9	139.3	102.3	81.7
70,0°	537.1	294.1	225.4	185.0	161.2	154.1	255.2	236.8	199.7	151.2	100.0	71.6	52.6
72,5°	165.8	135.8	113.3	93.1	80.6	77.3	268.9	225.8	168.3	106.4	67.9	42.9	32.0
75,0°	81.3	69.7	58.1	47.9	41.3	39.0	209.6	194.3	131.3	68.9	39.4	24.4	21.9
77,5°	41.1	35.1	29.8	23.1	20.4	19.4	113.2	119.8	81.1	38.2	18.0	12.0	10.3
80,0°	19.4	18.5	14.4	12.2	10.1	9.5	35.9	42.5	34.6	17.3	8.0	5.5	5.5
82,5°	9.4	8.3	6.4	5.4	4.6	4.3	5.9	6.3	6.7	4.6	3.1	2.9	2.8
85,0°	2.8	2.5	2.1	1.7	1.6	1.6	1.2	1.2	1.3	1.3	1.2	1.2	1.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.7	0.8	0.8	0.8	0.8	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
Table of values for luminous intensities		Maximum luminous intensity



C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	148.3	0.2	0.2
2,5°	145.4	145.3	145.0	144.9	144.8	144.7	144.6	144.6	144.7	144.9	144.9	1.8	2.0
5,0°	142.7	142.2	141.7	141.3	140.9	140.6	140.4	140.3	140.3	140.3	140.3	3.6	5.6
7,5°	140.6	139.6	138.8	138.1	137.6	137.0	136.8	136.6	136.6	136.5	136.5	5.4	10.9
10,0°	139.1	138.0	136.9	136.1	135.2	134.5	133.9	133.6	133.7	133.7	133.6	7.3	18.2
12,5°	138.7	137.3	136.1	134.9	133.7	132.7	131.9	131.5	131.4	131.8	131.8	9.3	27.5
15,0°	140.0	138.1	136.2	134.7	133.4	132.2	131.4	131.0	130.7	130.7	130.7	11.4	38.8
17,5°	142.5	140.2	138.4	136.2	134.2	132.2	130.6	129.3	128.7	128.6	128.8	13.4	52.3
20,0°	144.2	141.9	140.0	137.4	135.3	133.0	131.0	129.5	128.6	128.3	128.7	15.4	67.7
22,5°	147.1	144.0	141.1	138.8	137.2	134.9	132.7	130.9	129.7	129.2	129.8	17.5	85.2
25,0°	150.2	146.7	143.4	140.7	138.4	136.9	134.9	132.9	131.3	130.7	131.5	19.8	105.0
27,5°	153.7	149.7	146.2	143.2	140.7	139.1	137.1	135.3	133.7	132.7	133.4	22.2	127.1
30,0°	157.3	153.1	149.3	146.2	143.5	141.8	140.3	138.2	136.7	135.6	136.0	24.6	151.7
32,5°	162.1	157.6	154.1	150.9	147.7	146.0	144.9	142.3	140.4	139.2	139.3	27.1	178.9
35,0°	169.0	164.0	160.6	157.1	153.9	151.5	149.5	147.5	145.4	144.5	145.2	29.8	208.7
37,5°	178.8	171.9	168.3	164.4	160.7	157.8	155.9	154.3	152.1	150.8	152.0	32.6	241.2
40,0°	185.7	181.5	176.5	172.6	168.7	165.3	163.3	161.4	159.8	158.8	159.4	35.4	276.7
42,5°	193.6	188.5	185.1	180.2	176.1	172.4	170.4	169.0	167.7	167.1	167.0	38.3	315.0
45,0°	200.4	194.5	191.9	186.5	182.4	178.5	176.3	175.0	173.8	173.2	172.7	41.1	356.1
47,5°	205.3	199.5	194.5	190.9	185.5	182.2	179.7	176.1	172.4	170.3	168.9	43.6	399.7
50,0°	208.4	201.3	194.6	191.6	184.2	173.6	162.9	154.0	148.2	146.2	145.4	44.8	444.5
52,5°	206.4	199.4	191.9	178.7	162.3	145.0	134.4	128.6	126.0	125.2	126.9	45.3	489.8
55,0°	200.5	191.0	170.8	149.3	134.4	119.4	111.2	108.0	106.6	106.9	113.6	45.5	535.3
57,5°	187.9	163.3	140.7	121.7	106.4	96.3	91.1	91.9	92.2	90.7	95.9	46.2	581.5
60,0°	156.2	131.6	111.6	93.4	83.4	80.7	81.0	81.4	81.8	83.6	91.0	54.7	636.2
62,5°	122.4	100.3	81.4	71.0	71.2	74.7	75.5	76.2	75.9	78.9	84.8	71.9	708.1
65,0°	91.4	71.9	62.2	62.1	67.3	71.5	71.2	69.9	68.0	76.5	82.1	98.8	806.9
67,5°	61.6	55.3	53.3	60.0	66.6	67.6	64.6	59.9	41.5	39.8	50.4	92.9	899.8
70,0°	41.4	43.0	52.6	58.9	58.4	53.9	42.9	19.0	17.9	28.3	40.2	49.4	949.3
72,5°	31.6	38.8	44.5	44.5	38.5	31.6	16.1	14.2	13.4	20.8	26.1	24.8	974.0
75,0°	25.4	29.3	31.2	27.4	22.3	15.1	12.2	10.5	9.6	12.1	13.2	14.0	988.0
77,5°	11.8	16.6	15.7	12.8	11.4	9.8	8.8	7.0	5.7	5.6	6.5	7.1	995.1
80,0°	5.8	6.3	6.9	6.8	6.3	5.8	5.2	4.0	2.9	1.7	1.4	3.1	998.2
82,5°	3.0	3.3	3.5	3.5	3.8	3.3	2.9	2.2	1.7	1.3	1.1	1.2	999.4
85,0°	1.3	1.4	1.5	1.5	1.5	1.5	1.4	1.3	1.1	1.0	1.0	0.4	999.8
87,5°	0.8	0.8	0.9	0.9	0.9	0.9	1.0	1.0	1.0	1.0	1.0	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
Dimming levels table		siteco
environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	4940	35.5	37.5	36.5
95	238	252	4694	33.1	35.0	34.0
90	223	249	4454	30.9	32.6	31.8
85	207	247	4191	28.6	30.1	29.4
80	193	244	3954	26.6	28.0	27.3
75	179	241	3711	24.6	25.9	25.2
70	165	238	3462	22.6	23.8	23.2
65	151	235	3205	20.7	21.8	21.2
60	138	232	2962	18.9	19.9	19.4
55	125	228	2713	17.2	18.1	17.6
50	113	224	2477	15.5	16.4	16.0
45	100	220	2216	13.9	14.6	14.2
40	88	215	1971	12.3	12.9	12.6
35	76	210	1720	10.8	11.3	11.0
30	65	204	1486	9.4	9.8	9.6
25	53	197	1227	7.9	8.3	8.1
20	42	188	984	6.6	6.9	6.8
15	31	177	737	5.3	5.5	5.4
13	26	171	624	4.7	4.9	4.8

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5070	35.9	38.0	37.0
95	238	252	4811	33.5	35.4	34.4
90	223	249	4559	31.3	33.0	32.2
85	208	247	4303	29.1	30.7	29.9
80	194	244	4056	27.0	28.5	27.8
75	180	241	3805	25.0	26.4	25.7
70	166	238	3547	23.0	24.4	23.7
65	153	235	3301	21.3	22.4	21.8
60	139	232	3032	19.3	20.3	19.8
55	127	229	2797	17.7	18.7	18.2
50	114	225	2536	16.0	16.7	16.4
45	102	221	2291	14.3	15.1	14.7
40	89	216	2020	12.6	13.2	12.9
35	77	210	1765	11.1	11.6	11.4
30	66	205	1527	9.6	10.1	9.8
25	54	197	1263	8.1	8.5	8.3
20	43	189	1017	6.8	7.1	7.0
15	32	178	768	5.5	5.7	5.6
12	26	171	631	4.8	5.0	4.9

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
------------------------------------------------	----------------------------------------------------------------	---------------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5010	35.7	37.7	36.7
95	238	252	4757	33.3	35.2	34.2
90	223	249	4511	31.1	32.8	32.0
85	208	247	4259	28.9	30.5	29.7
80	193	244	4000	26.7	28.2	27.4
75	179	241	3752	24.8	26.1	25.5
70	165	238	3498	22.8	24.0	23.4
65	152	235	3256	20.9	22.1	21.5
60	139	232	3009	19.2	20.2	19.7
55	126	228	2757	17.4	18.3	17.8
50	113	224	2498	15.6	16.5	16.0
45	101	220	2255	14.0	14.8	14.4
40	89	216	2008	12.5	13.1	12.8
35	77	210	1754	11.0	11.5	11.2
30	65	204	1496	9.5	9.9	9.7
25	54	197	1257	8.1	8.4	8.2
20	43	189	1012	6.8	7.0	6.9
15	31	177	741	5.3	5.6	5.4
13	26	171	628	4.8	4.9	4.8

Photometric test report

Family Streetlight 31 micro toolless	Order number: 5XH514AA08DA EAN: 4069025512543	LP number 59800_3409
------------------------------------------------	----------------------------------------------------------------	---------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	4940.0	35.5
5.0	5070.0	35.9
15.0	5010.0	35.7