


Order No.: 0LS5297L10840S | **GTIN (EAN):** 4052899933941

Product description: BRIKsl,wd,900lm840,0/1,PC



4052899933941
0LS5297L10840S


LED 4000K / CRI ≥ 80 Φ_{H} 900 lm



POWERBRIK® Slim, damp-proof luminaire, primary optical cover: enclosure, of PC, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 900lm, luminous efficacy: 95lm/W, light colour: 840, colour temperature: 4000K, control gear: ECG, with terminal, 2-pole, max. 1.5mm², mains connection: 230V, AC/DC, 0/50..60Hz, rated input power: 9.5W, housing, of PC, traffic white (RAL 9016), length: 350mm, width: 35mm, height: 42mm, protection rating (complete): IP65, insulation class (complete): insulation class II (safety insulation), certification: CE, UKCA, protection symbol: D, impact resistance: IK05, permissible operating ambient temperature: -20...+40°C, standard: EN 60598-2-1, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, unprotected outdoor installations, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, packaging unit: 1 piece

IP 65

Lamps:	LED
Wt. (kg):	0.4
GTIN (EAN):	4052899933941



Order No.: 0LS5297L10840S | **GTIN (EAN):** 4052899933941

Detailed technical description: BRIKsl,wd,900lm840,0/1,PC



Key data

- Product type: damp-proof luminaire
- Product name: POWERBRIK® Slim
- Order No.: 0LS5297L10840S

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: enclosure
- Beam angle: wide distribution
- Symmetry: symmetric

Lamps:

- Lamps: with LED
- Rated luminous flux: 900lm
- Luminous efficacy: 95lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 5 SDCM (initial)
- Rated input power: 9.5W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP65
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK05
- Protection symbol: D
- Temperature range (operation): - 20..+40°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, unprotected outdoor installations, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Standard: EN 60598-2-1
- Certification, designation: CE, UKCA

Material, Colour

- housing: PC, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: enclosure of PC

Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall

Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm²
- Nominal voltage: 230V, 220..240V, 0/50..60Hz, AC/DC

Dimensions, Weight


- Length: 350mm
- Width: 35mm
- Height: 42mm
- Weight: 0.4kg

Service life

- Rated service life: 50000h (L70/B50) at AT = 25°C

Order No.: 0LS5297L10840S | **GTIN (EAN):** 4052899933941

Dimensions: BRIKsl,wd,900lm840,0/1,PC

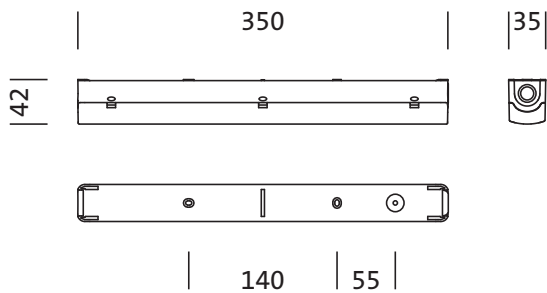

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 0LS5297L10840S | GTIN (EAN): 4052899933941


Planning data: BRIKsl,wd,900lm840,0/1,PC

0LS5297L10840S: 1x LED
4000K / CRI ≥ 80

4052899933941

0LS5297L10840S

LED 4000K / CRI ≥ 80 ϕ_H 900 lm



ϕ_d 87% ϕ_t 13%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	9550	8369
L ₇₀	10692	11901
L ₆₅	11316	13075

UGR 25.8 23.8

X 4H Y 8H ρ 70/50/20 S 0.25H

No. of luminaires in room

Reflection factors 70/50/20

Em(lx)	100		200		500	
Lh(m)	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	3.9	4.6	7.9	9.2	20	23
30 m ²	5.7	6.5	11	13	29	32
40 m ²	7.3	8.1	15	16	36	41
50 m ²	8.7	9.6	17	19	44	48
75 m ²	12	14	25	27	62	68
100 m ²	16	17	32	35	80	87
500 m ²	71	73	142	147	354	367

Maintenance factor 0.8

Rh = Lh + 0.5 m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 10.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -