

Order No.: 5XA779117K01BA | GTIN (EAN): 4058352857465

Product description: FL11mx,RS07,104100lm750,DA2



Floodlight FL 11 maxi floodlight; light control with lens of PMMA; cover panel of toughened safety glass, transparent; light distribution: RS07, asymmetric direct distribution, LED colour temperature: 5000K, rated luminous flux: 104.100lm, colour rendering: CRI > 70, light colour: 750; luminous efficacy: 137lm/W; brightness control: DALI 2; with terminal, 8-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V/380..400V AC, 50/60Hz, surge voltage resistance: line to ground: 10kV, LED unit replaceable, LED unit replaceable without ESD environment, dimming range 0.1..100%; 758W floodlight LED unit of diecast aluminium, coated grey; length: 713mm / width: 651mm / height: 338mm; housing frame, of diecast aluminium, uncoated, natural, mounting bracket, of diecast aluminium, equipment: Power, protection rating (complete): IP66; insulation class (complete): insulation class I (protective earthing); certification: CE, ENEC, VDE; ball protection: ball impact resistance with accessories, impact resistance: IK07; permissible storage temperature: -40..+85°C; packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	23.1
GTIN (EAN):	4058352857465



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XA779117K01BA | **GTIN (EAN):** 4058352857465

**Detailed technical description:** FL11mx,RS07,104100lm750,DA2



## Key data

- Product type: floodlight
- Product name: Floodlight FL 11 maxi
- Order No.: 5XA779117K01BA

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover panel, transparent
- Light distribution: RS07
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 104100lm
- Luminous efficacy: 137lm/W
- Colour temperature: 5000K
- Colour rendering index: CRI > 70
- Light colour: 750
- Rated input power: 758W

#### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK07
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- LED unit: diecast aluminium, coated, grey
- Colour specification: grey
- housing frame: diecast aluminium, uncoated, natural
- Colour specification: natural
- mounting bracket: diecast aluminium
- Cover: cover panel of toughened safety glass

## Mounting

- Mounting method, mounting location: surface-mounted, to supporting structure, to the ceiling, to the cross arm
- Supplement: luminaire head with bracket 17.6kg, control gear 5.6kg
- Arrangement: single arrangement
- Supplement: with mounting bracket

## Electrical connection

- Connection: terminal, 8-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V/380..400V, 50/60Hz, AC
- Surge voltage resistance: line to ground: 10kV

## Dimensions, Weight


- Length: 713mm
- Width: 651mm
- Height: 338mm
- Weight: 23.1kg

## Light emission

- Light emission: 0% at 0° inclination

**Order No.:** 5XA779117K01BA | **GTIN (EAN):** 4058352857465

**Dimensions:** FL11mx,RS07,104100lm750,DA2

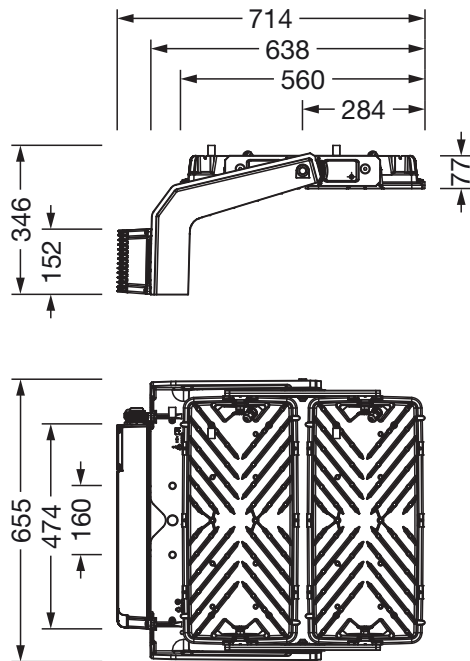

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 01.03.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -