


**Order No.:** 51FXC27A610A | **GTIN (EAN):** 4058352933947


**Product description:** MonEx,diff,1600lm865,0/1,5x2.5<sup>2</sup>,PC



Monsun Ex, damp-proof luminaire, primary optical cover: cover, of PC, UV-stabilised, opal, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED, rated luminous flux: 1.600lm, luminous efficacy: 123lm/W, light colour: 865, colour temperature: 6500K, control gear: ON/OFF, with terminal, 3-pole, max. 2.5mm<sup>2</sup>, through-wiring: 5x 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, rated input power: 13W, housing, of PC, light grey (RAL 7035), incl. 2x Ex cable gland M20 for cable diameter 7..12mm with sealing, incl. 3x Ex locking screw M20 with sealing, length: 338mm, width: 176mm, height: 110mm, clip for enclosure, of stainless steel, protection rating (complete): IP66, insulation class (complete): insulation class I (protective earthing), certification: CE, explosion class: zone 2,22 II 3G Ex nR IIC T6 GC, II3D Ex tc IIIC T65°C Dc, impact resistance: IK10, permissible operating ambient temperature: -20..+50°C, LABS conformity tested according to VDMA 24364:2018-05, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity, packaging unit: 1 piece

IP 66 IK 10  

Lamps: LED  
Wt. (kg): 0.9  
GTIN (EAN): 4058352933947



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51FXC27A610A | GTIN (EAN): 4058352933947

**Detailed technical description:** MonEx,diff,1600lm865,0/1,5x2.5<sup>2</sup>,PC



#### Key data

- Product type: damp-proof luminaire
- Product name: Monsun Ex
- Order No.: 51FXC27A610A

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Lighting technology:

- Cover: cover, opal
- Beam angle: diffuse distribution
- Symmetry: symmetric
- Light emission: direct distribution

##### Lamps:

- Lamps: with LED
- Rated luminous flux: 1600lm
- Luminous efficacy: 123lm/W
- Colour temperature: 6500K
- Colour rendering index: CRI > 80
- Light colour: 865
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq$  3 SDCM (initial)
- Rated input power: 13W

##### Operating device:

- Control gear: ECG
- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK10
- Temperature range (operation): -20..+50°C
- Supplement: LABS conformity tested according to VDMA 24364:2018-05, contact your sales advisor before using the luminaires in applications with unclear chemical exposure, large temperature fluctuations or condensation-forming humidity
- Certification, designation: CE

#### Material, Colour

- housing: PC, light grey (RAL 7035), incl. 2x Ex cable gland M20 for cable diameter 7..12mm with sealing, incl. 3x Ex locking screw M20 with sealing
- Colour specification: light grey (RAL 7035)
- clip for enclosure: stainless steel
- Cover: cover of PC, UV-stabilised

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling, to the wall, to the chain
- Arrangement: single arrangement

#### Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50/60Hz, AC
- Through-wiring: 5x 2.5mm<sup>2</sup>

#### Dimensions, Weight


- Length: 338mm
- Width: 176mm
- Height: 110mm
- Mounting distance: 100mm
- Weight: 0.9kg

#### Service life

- Rated service life: 60000h (L80/B10) at AT = 25°C

**Order No.:** 51FXC27A610A | **GTIN (EAN):** 4058352933947

**Dimensions:** MonEx,diff,1600lm865,0/1,5x2.5<sup>2</sup>,PC

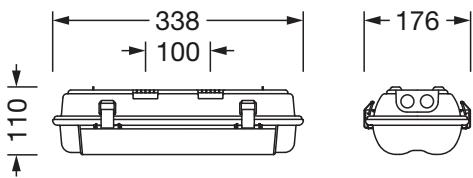

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
Tolerances related to thermal, electrical and photometric data according to IEC 62722  
Issued 30.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -