

Order No.: 5XC2AC1Y08GE | GTIN (EAN): 4069025078797


Product description: SL11iQmn,ST1.2a,3570lm722-40,SR,D4i,LST



Streetlight SL 11 iQ mini, mast luminaire, primary light control with 3 zone faceted reflector, of plastic, silver coated, highly specular, primary optical cover: cover, of PMMA, transparent, light distribution: ST1.2a, light emission: direct distribution, primary light characteristic: asymmetric, installation type: post-top, side-entry, lamps: LED, High Power LED, rated values: 3.570lm | 24,9W | 143,4lm/W (begin service life); end service life: 3.570lm | 25,7W; at 50% lumin. flux: 1.785lm | 12,8W | 139,5lm/W, colour temperature: 2200/2700/3000/4000K, colour rendering: CRI > 70, light colour: 722/727/730/740, light setting 1 begin service life: 100% | 3.570lm | 24,9W | 143,4lm/W | 3.000K, light setting 1 end service life: 25,7W, further light settings possible, control: pre-setting: logarithmic dimming characteristic, Street-Remote, Auto-Match, Temp-Guard, Lumen-Switch, Night-Set, Smart-Wire, Light-Fading, Desk-Remote (wireless, voltage-free reading and setting of iQ features in the workshop via application-optimized NFC function/RFID function), optimised constant luminous flux control (CLO 2.0), with cable H07RN-F 5x 1.5mm<sup>2</sup>, mains connection: 230..240V, AC, 50/60Hz, connection cable pre-assembled, cable length: 6,5m, luminaire housing, of diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), please order mast flange separately, inclination adjustable without tools: 0°, 5°, 10°, 15° (post-top) | 0°, -5°, -10°, -15° (side-entry), sealing non-destructively replaceable, multi-level sealing system, length: 736mm, width: 174mm, height: 116mm, mast flange for spigot size: 42mm (side-entry): 5XC10008XM4, 60/48mm (side-entry/post-top): 5XC10108XM2, 76/60mm (side-entry/post-top): 5XC10108XM1, equipment: standard, Smart Interface below and above, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, ENEC+, VDE, UKCA, impact resistance: IK10, permissible operating ambient temperature for outdoor applications: -25..+50°C, standard-compliant lighting for roads and squares, Environmental Product Declaration (EPD) tested and certified by an independent institute, packaging unit: 1 piece



Lamps: LED  
Wt. (kg): 6.8  
GTIN (EAN): 4069025078797



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XC2AC1Y08GE | **GTIN (EAN):** 4069025078797

**Detailed technical description:** SL11iQmn,ST1.2a,3570lm722-40,SR,D4i,LST



## Key data

- Product type: mast luminaire
- Product name: Streetlight SL 11 iQ mini
- Order No.: 5XC2AC1Y08GE

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: 3 zone faceted reflector of plastic, silver coated, highly specular
- Cover: cover, transparent
- Light distribution: ST1.2a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with High Power LED, LED
- Rated values: 3570lm | 24.9W | 143.4lm/W (begin service life); end service life: 3570lm | 25.7W; at 50% lumin. flux: 1785lm | 12.8W | 139.5lm/W
- Colour temperature: 2200/2700/3000/4000K
- Colour rendering index: CRI > 70
- Light colour: 722/727/730/740
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 5 SDCM (initial)

#### Factory light settings (LS):

- begin service life:  
LS 1: 100% | 3570lm | 24.9W | 143.4lm/W | 3000K
- end service life:  
LS 1: 25.7W
- further light settings possible

## Operating device:

- Control: iQ-Street Remote, D4i with power reduction, Smart Interface below and above
- Equipment: optimised constant luminous flux control (CLO 2.0), Desk-Remote (wireless, voltage-free reading and setting of iQ features in the workshop via application-optimized NFC function/RFID function), Light-Fading, Smart-Wire, Night-Set, Lumen-Switch, Temp-Guard, Auto-Match, Street-Remote, pre-setting: logarithmic dimming characteristic

## Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK10
- Temperature range (operation): - 25..+50°C
- Supplement: standard-compliant lighting for roads and squares
- Certification, designation: CE, ENEC, ENEC+, VDE, UKCA
- EPD: Environmental Product Declaration (EPD) tested and certified by an independent institute

## Material, Colour

- luminaire housing: diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), please order mast flange separately, inclination adjustable without tools: 0°, 5°, 10°, 15° (post-top) | 0°, -5°, -10°, -15° (side-entry), sealing non-destructively replaceable, multi-level sealing system
- Colour specification: Siteco® metallic grey (DB 702S)
- Cover: cover of PMMA

## Mounting

- Mounting method, mounting location: side-entry, post-top, on mast

**Order No.:** 5XC2AC1Y08GE | **GTIN (EAN):** 4069025078797

**Detailed technical description:** SL11iQmn,ST1.2a,3570lm722-40,SR,D4i,LST



#### Electrical connection

- Connection: cable H07RN-F 5x 1.5mm<sup>2</sup>
- Nominal voltage: 230..240V, 50/60Hz, AC
- Surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode)
- Connection cable: pre-assembled, L= 6.5m
- Feature: adjustment of the light colour with discrete colour mixing in the reflector, no colour differences visible on the luminaire; control via Night-Set or Smart-Wire using existing ECG, without additional integrated component; control of the four defined colour temperatures using DALI Device Type 8 Colour Type Tc (DT8 tunable white), robust luminaire electronics through 1-channel control

#### Dimensions, Weight

- Length: 736mm
- Width: 174mm
- Height: 116mm
- Weight: 6.8kg
- Mast spigot: mast flange for spigot size: 42mm (side-entry): 5XC10008XM4, 60/48mm (side-entry/post-top): 5XC10108XM2, 76/60mm (side-entry/post-top): 5XC10108XM1

#### Light emission


- Light emission: 0% at 0° inclination

#### Service life

- Rated service life: 100000h at AT = 25°C

**Order No.:** 5XC2AC1Y08GE | **GTIN (EAN):** 4069025078797

**Dimensions:** SL11iQmn,ST1.2a,3570lm722-40,SR,D4i,LST

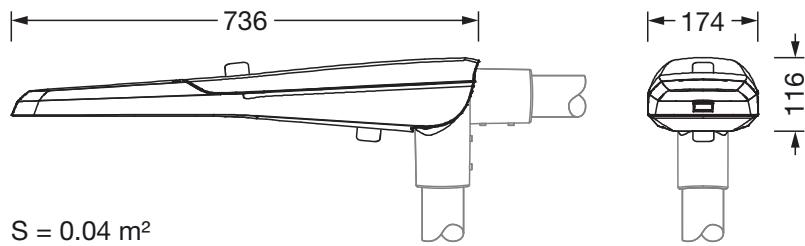

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)