


**Order No.:** 53BD812CV675C2 | **GTIN (EAN):** 4069025185877


**Product description:** DUS31G2,LI,wd,7670lm865,MLCi,wh,5su



DUS® 31 Gen.2, luminaire insert, of sheet steel, coil coated, white, length: 1.535mm, width: 81mm, height: 90mm, 5x system unit, system units: 307mm, LED rated luminous flux: 7.670lm, light colour: 865, control gear: ON/OFF Multilumen, CLOi, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, start of lifetime: 42W, end of service life: 50W, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -35...+50°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	1.8
GTIN (EAN):	4069025185877

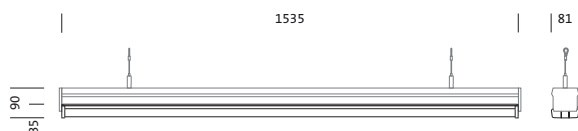

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 53BD812CV675C2 | **GTIN (EAN):** 4069025185877

**Detailed technical description:** DUS31G2,Ll,wd,7670lm865,MLCi,wh,5su



#### Key data

- Product type: luminaire insert
- Product name: DUS® 31 Gen.2
- Order No.: 53BD812CV675C2

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 25$
- UGR viewing direction along lateral luminaire axis:  $\leq 25$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 7670lm
- Luminous efficacy: 182lm/W
- Colour temperature: 6500K
- Colour rendering index: CRI  $> 80$
- Light colour: 865
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power begin service life: 42
- Rated input power end service life: 50

#### Operating device:

- Control: ON/OFF Multilumen, CLOi

#### Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): -35...+50°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting
- Certification, designation: CE, ENEC, VDE, UKCA

#### Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in DUS® mounting rail
- Colour specification: white
- Cover: cover of PMMA

#### Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220...240V, 50/60Hz, AC

#### Dimensions, Weight


- System units: 5x SE
- Length: 1535mm
- Width: 81mm
- Height: 90mm
- Weight: 1.8kg

#### Service life

- Rated service life: 70000h (L100/B50) at AT = ta max, 70000h (L100/B50) at AT = 25°C

**Order No.:** 53BD812CV675C2 | **GTIN (EAN):** 4069025185877

**Dimensions:** DUS31G2,LI,wd,7670lm865,MLCi,wh,5su

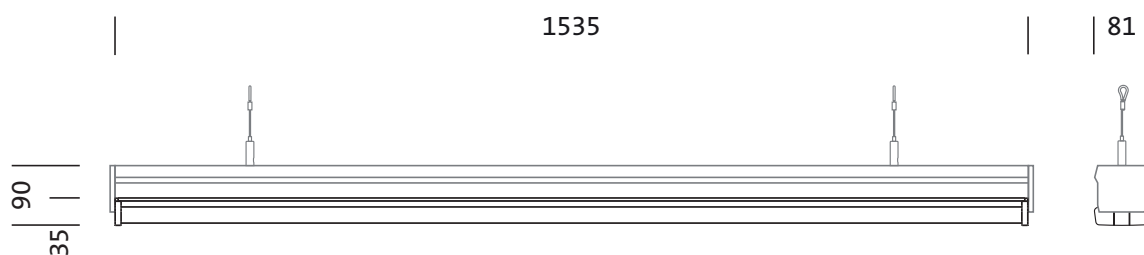

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)