




# Photometric test report

<b>Family</b> <b>Highbay 31</b>	<b>Order number: 51HC427A4JMB + 59HC91001</b> <b>EAN: 4058352700174 + 4058352463192</b>	<b>LP number</b> <b>59130_3</b>
	<b>Version</b> primary light control with lens, PC, clear, prismatic reflector, PC, wide distribution	<b>serial documentation</b> <b>16.01.2023</b>
	<b>Lamps</b> LED 4000 K   CRI ≥ 80	
	<b>Controlgear</b> ECG	
<b>Rated values</b>	Net luminous flux = 18950 lm Power consumption = 134.0 W Luminous efficacy = 141.4 lm/W	

**Luminous intensity in cd/klm** C180-0 **Imax: 716 cd/klm**

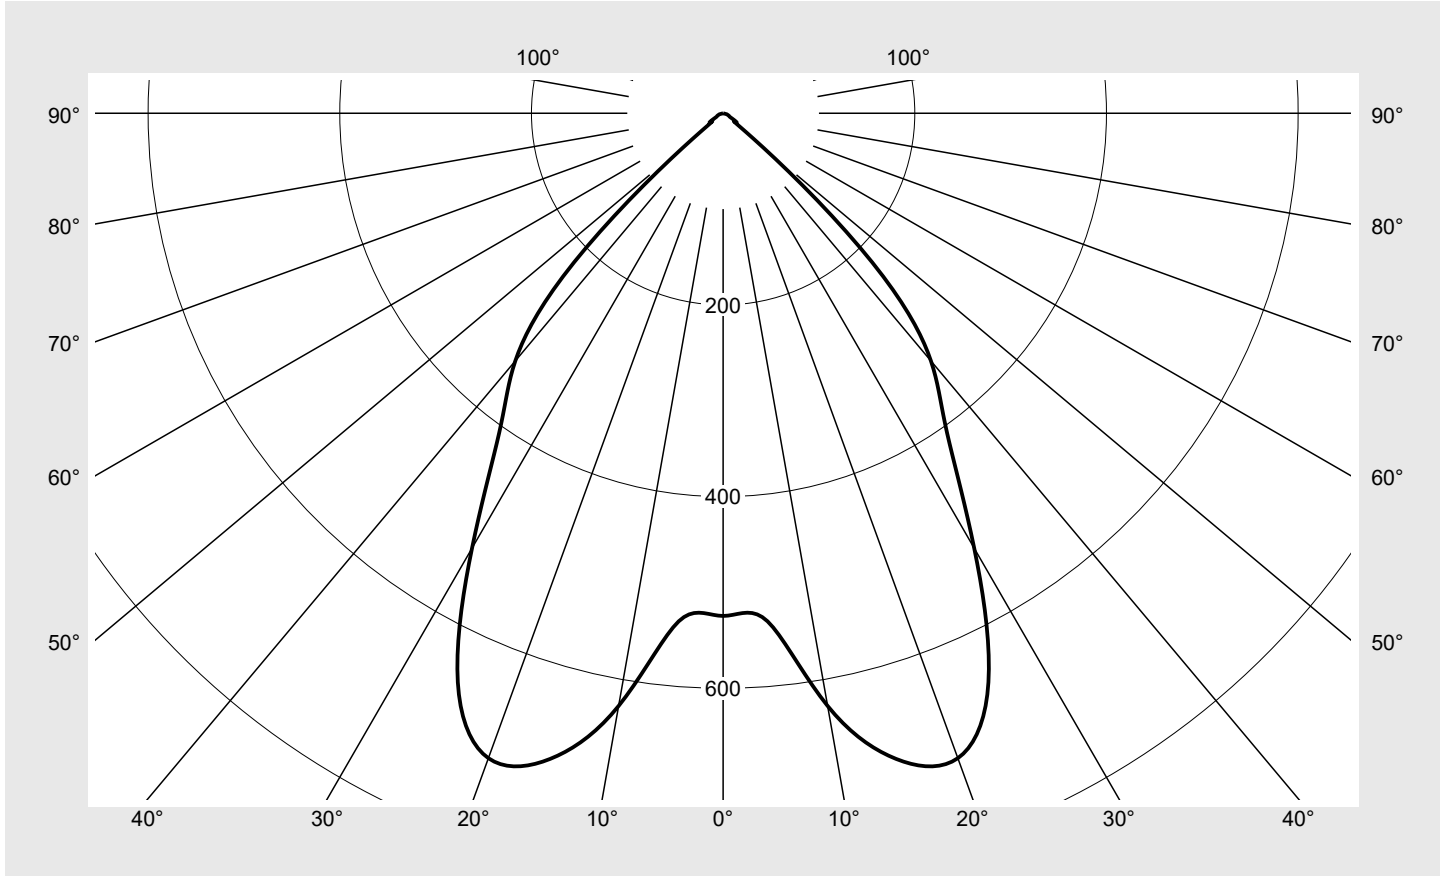

Classifications	
DIN 5040	A 6 2
CIE	N1=85 N2=99 N3=100 N4=99 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	99.0%
$\phi_o$	1.0%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

Family Highbay 31	Order number: 51HC427A4JMB + 59HC91001 EAN: 4058352700174 + 4058352463192	LP number 59130_3
----------------------	--	----------------------

Table of values for luminous intensities	Maximum luminous intensity	sITeco
--	----------------------------	--------

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm	Luminous flux in lm/klm	
0°	524.5	3.1	3.1
5°	532.2	25.4	28.6
10°	628.0	59.8	88.3
15°	697.5	98.9	187.3
20°	716.1	134.3	321.5
25°	655.1	151.7	473.3
30°	524.0	143.6	616.9
35°	407.5	128.1	745.0
40°	337.4	118.9	863.9
45°	219.9	85.2	949.1
50°	41.9	17.6	966.7
55°	16.7	7.5	974.2
60°	10.1	4.8	979.0
65°	6.9	3.4	982.4
70°	5.2	2.7	985.1
75°	3.9	2.1	987.2
80°	2.6	1.4	988.6
85°	1.8	1.0	989.6
90°	1.2	0.7	990.2
95°	1.2	0.7	990.9
100°	1.3	0.7	991.6
105°	1.5	0.8	992.4
110°	1.4	0.7	993.1
115°	1.1	0.5	993.7
120°	1.1	0.5	994.2
125°	1.2	0.5	994.7
130°	1.4	0.6	995.3
135°	1.8	0.7	996.0
140°	2.2	0.8	996.8
145°	2.2	0.7	997.5
150°	2.3	0.6	998.1
155°	2.5	0.6	998.7
160°	2.7	0.5	999.2
165°	2.8	0.4	999.6
170°	2.7	0.3	999.9
175°	2.5	0.1	1000.0
180°	2.3	0.0	1000.0

## Photometric test report

Family Highbay 31	Order number: 51HC427A4JMB + 59HC91001 EAN: 4058352700174 + 4058352463192	LP number 59130_3
----------------------	--	----------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.7	20.0	19.0	20.3	20.6	18.7	20.0	19.0	20.3	20.6
	3H	18.5	19.7	18.9	20.0	20.4	18.5	19.7	18.9	20.0	20.4
	4H	18.5	19.5	18.9	19.9	20.3	18.5	19.5	18.9	19.9	20.3
	6H	18.4	19.4	18.8	19.7	20.1	18.4	19.4	18.8	19.7	20.1
	8H	18.5	19.3	18.9	19.7	20.1	18.5	19.3	18.9	19.7	20.1
	12H	18.4	19.2	18.9	19.6	20.0	18.4	19.2	18.9	19.6	20.0
4H	2H	18.5	19.5	18.9	19.9	20.2	18.5	19.5	18.9	19.9	20.2
	3H	18.3	19.2	18.8	19.6	20.0	18.3	19.2	18.8	19.6	20.0
	4H	18.3	19.0	18.7	19.4	19.9	18.3	19.0	18.7	19.4	19.9
	6H	18.2	18.8	18.6	19.3	19.7	18.2	18.8	18.6	19.3	19.7
	8H	18.2	18.7	18.6	19.2	19.7	18.2	18.7	18.6	19.2	19.7
	12H	18.2	18.6	18.6	19.1	19.6	18.2	18.6	18.6	19.1	19.6
8H	4H	18.2	18.7	18.6	19.2	19.7	18.2	18.7	18.6	19.2	19.7
	6H	18.1	18.5	18.6	19.0	19.5	18.1	18.5	18.6	19.0	19.5
	8H	18.0	18.4	18.5	18.9	19.5	18.0	18.4	18.5	18.9	19.5
	12H	18.0	18.3	18.5	18.8	19.4	18.0	18.3	18.5	18.8	19.4
12H	4H	18.1	18.6	18.6	19.1	19.6	18.1	18.6	18.6	19.1	19.6
	6H	18.0	18.4	18.6	18.9	19.4	18.0	18.4	18.6	18.9	19.4
	8H	18.0	18.3	18.5	18.8	19.4	18.0	18.3	18.5	18.8	19.4

<b>Luminance table</b>	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 480	H(C0) = 227	H(C180) = 227
				H(C90) = 227	H(C270) = 227

C-planes		0°
$\gamma$	Luminance in cd/m <sup>2</sup>	
45°	20331.5	
50°	3974.4	
55°	1637.1	
60°	1031.8	
65°	750.6	
70°	600.5	
75°	483.1	
80°	357.6	
85°	275.1	

**Photometric test report**

<b>Family</b> <b>Highbay 31</b>	<b>Order number: 51HC427A4JMB + 59HC91001</b> <b>EAN: 4058352700174 + 4058352463192</b>	<b>LP number</b> <b>59130_3</b>
------------------------------------	--	------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

